

Enclosures for multimedia and communication device DIDO ECG MEDIA

ENCLOSURE FOR MULTIMEDIA AND COMMUNICATION DEVICES

- Telephone connection
- Modems and routers (for wireless use plastic door!)
- Antenna, cable or satellite TV connection
- Included perforated mounting plate (zinc plated steel),
- Included installation accessories for concrete and hollow walls



Flush mounted multimedia distribution board - perforated metal door, white

| Type | Code No. | Number of mounting plates | Weight [g] | Packaging [pcs] |
|--------------|-----------|---------------------------|------------|-----------------|
| ECG14MEDIA-I | 001101156 | 1 | 2000 | 1 |
| ECG28MEDIA-I | 001101157 | 2 | 2500 | 1 |
| ECG42MEDIA-I | 001101158 | 3 | 3000 | 1 |
| ECG56MEDIA-I | 001101159 | 4 | 3500 | 1 |
| ECG70MEDIA-I | 001101179 | 5 | 5000 | 1 |

*Rear side plastics conforms 650°C glow wire test (not appropriate for wooden or hollow walls - IEC 60670-24)

Flush mounted multimedia distribution board - plastic door - transparent

| Type | Code No. | Number of mounting plates | Weight [g] | Packaging [pcs] |
|--------------|-----------|---------------------------|------------|-----------------|
| ECG14MEDIAPT | 001101186 | 1 | 2000 | 5 |
| ECG28MEDIAPT | 001101187 | 2 | 2500 | 5 |
| ECG42MEDIAPT | 001101188 | 3 | 3000 | 5 |

*Rear side plastics conforms 650°C glow wire test (not appropriate for wooden or hollow walls - IEC 60670-24)

Flush mounted multimedia distribution board - plastic door - white

| Type | Code No. | Number of mounting plates | Weight [g] | Packaging [pcs] |
|--------------|-----------|---------------------------|------------|-----------------|
| ECG14MEDIAPO | 001101189 | 1 | 2000 | 5 |
| ECG28MEDIAPO | 001101190 | 2 | 2500 | 5 |
| ECG42MEDIAPO | 001101191 | 3 | 3000 | 5 |

*Rear side plastics conforms 650°C glow wire test (not appropriate for wooden or hollow walls - IEC 60670-24)



ECG42(H)COMB02/1-I



ECG56(H)COMB02/2-I

ECG70(H)COMB03/2-I

Flush mounted multimedia distribution board - perforated metal door, white

| Type | Code No. | Description | Weight [g] | Packaging [pcs] |
|-----------------|-----------|--------------------------|------------|-----------------|
| ECG42COMB02/1-I | 001100220 | 2 Media + 1 Modular row | 3400 | 1 |
| ECG56COMB03/1-I | 001100221 | 3 Media + 1 Modular row | 4100 | 1 |
| ECG56COMB02/2-I | 001100222 | 2 Media + 2 Modular rows | 4100 | 1 |
| ECG70COMB04/1-I | 001100223 | 4 Media + 1 Modular row | 4900 | 1 |
| ECG70COMB03/2-I | 001100224 | 3 Media + 2 Modular rows | 4900 | 1 |
| ECG70COMB02/3-I | 001100225 | 2 Media + 3 Modular rows | 5000 | 1 |

*Rear side plastics conforms 650°C glow wire test (not appropriate for wooden or hollow walls - IEC 60670-24)



Home distribution board DIDO-E

Technical data

| | |
|--------------------------|--------------------------------------|
| Degree of protection | IP 40* |
| Colour | white |
| Double insulation | <input type="checkbox"/> |
| Standard | IEC 62208, IEC 60670-1, IEC 60670-24 |
| Installation temperature | -25° / +60°C |
| Glow wire test | 650°C |

*IP 30 for EC 1+1, 3+1, 3+2, ECGxxMEDIA

Number of N - PE terminals:

| | |
|-----------------|-------------------|
| ECT/M8PT/PO | 2x8...8 PE / 8 N |
| ECT/M12PT/PO | 2x10 10 PE / 10 N |
| ECT/M18PT/PO | 2x13 13 PE / 13 N |
| ECT/M24PT/PO | 2x13 13 PE / 13 N |
| ECT/M36PT/PO | 2x15 15 PE / 15 N |
| ECT48PT/PO | 2x20 20 PE / 20 N |
| ECT/M 2x18PT/PO | 2x15 15 PE / 15 N |
| ECT/M 3x18PT/PO | 2x25 25 PE / 25 N |
| ECG14 | 2x10 10 PE / 10 N |
| ECG28 | 2x13 13 PE / 13 N |
| ECG42 | 2x15 15 PE / 15 N |
| ECG56 | 2x20 20 PE / 20 N |
| ECG70 | 2x30 30 PE / 30 N |
| EC 1+1 | - |
| EC 3+1 | - |
| EC 3+2 | 2x4 4 PE / 4 N |


- ECG14, ECG28, ECG42 have 1 additional free space to build in an extra PST-UNI terminal.

- ECG56 has 3 additional free spaces to build in up to 3 extra PST-UNI terminals.

- Double insulation not valid for ECG MEDIA

Surface mounted distribution board

| type | Dimensions | | | | | Max. allowed power losses when Max. number of devices are installed Pde |
|---------------------|------------|--------|--------|--------|--------|--|
| | A | B | C | D | E | |
| ECT8PT/ECT8PO | 236 mm | 215 mm | 112 mm | 107 mm | 108 mm | 14W |
| ECT12PT/ECT12PO | 236 mm | 287 mm | 112 mm | 107 mm | 180 mm | 22W |
| ECT18PT/ECT18PT | 236 mm | 396 mm | 112 mm | 107 mm | 289 mm | 22W |
| ECT24PT/ECT24PO | 361 mm | 287 mm | 112 mm | 232 mm | 180 mm | 24W |
| ECT36PT/ECT36PO | 482 mm | 287 mm | 112 mm | 357 mm | 180 mm | 26W |
| ECT48PT/ECT48PO | 652 mm | 287 mm | 112 mm | 357 mm | 180 mm | 28W |
| ECT2x18PT/ECT2x18PO | 361 mm | 396 mm | 112 mm | 232 mm | 289 mm | 26W |
| ECT3x18PT/ECT3x18PO | 526 mm | 396 mm | 112 mm | 357 mm | 289 mm | 26W |

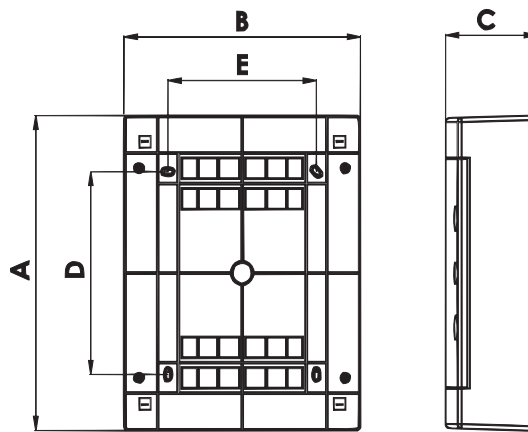

Flush mounted distribution board

| type | Dimensions | | | | | | | Max. allowed power losses when Max. number of devices are installed Pde |
|---------------------|------------|--------|-------|--------|--------|--------|--------|--|
| | A | B | C | D | E | F | G | |
| ECM8PT/ECM8PO | 212 mm | 201 mm | 68 mm | - | 211 mm | 232 mm | 99 mm | 14W |
| ECM12PT/ECM12PO | 212 mm | 273 mm | 68 mm | - | 283 mm | 232 mm | 106 mm | 22W |
| ECM18PT/ECM18PO | 212 mm | 373 mm | 68 mm | - | 392 mm | 232 mm | 106 mm | 22W |
| ECM24PT/ECM24PO | 336 mm | 273 mm | 68 mm | 125 mm | 283 mm | 357 mm | 106 mm | 24W |
| ECM36PT/ECM36PO | 460 mm | 273 mm | 68 mm | 125 mm | 283 mm | 482 mm | 106 mm | 26W |
| ECM2x18PT/ECM2x18PO | 336 mm | 373 mm | 68 mm | 125 mm | 392 mm | 357 mm | 106 mm | 26W |
| ECM3x18PT/ECM3x18PO | 502 mm | 373 mm | 68 mm | 125 mm | 392 mm | 522 mm | 106 mm | 26W |

