

NV/NH horizontal fuse-switch disconnectors KVL for busbar mounting


Uniform cover cutout

KVL - horizontal fuse-switch disconnectors with different sizes can be combined together and form uniform cover cutout. The new assortment contains four cover support levels at 32, 60, 70 and 90 mm above the upper of busbar. KVL fuse-switch disconnectors can be mounted on busbars (for baseplates and DIN rails see chapter NV/NH).

- Available with 1- and 3-pole versions
- Four sizes: size 00, size 1, size 2, size 3
- Use with NV/NH Fuse-links 000, 00, 1, 2, 3

Busbar mounting

KVL-00 to KVL-3 can be mounted onto 60mm busbar systems - no drilling required

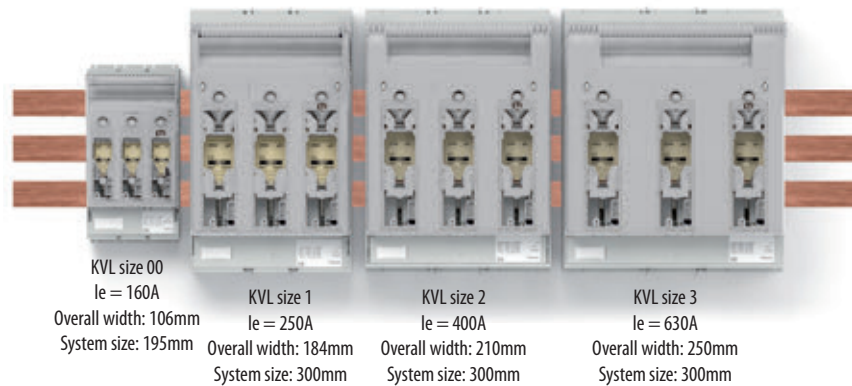


Practical advantages



Uniform cover cutout for all sizes disconnectors

- Changeable installation depth by 4 different field supporting surfaces (32mm, 60mm, 70mm, 90mm)




Area-saving

- integrated feeding terminal
- Busbar supply and safe outgoing cable outlet
- Busbar supports up to 20mm width, 19mm height max.

Easy adjustments

- adjustment to 5mm or 10mm thick bars
- simple modification of cable terminal from bottom side to top side



Retrofittable switch position indicator

- Dual monitoring in each unit
- Separate circuits function
- Wide range of applications due to high switching capacity 10/3A (resistive/ind.) AC250V



New generation!