EFI-P4R B G/KV 100/0.03



Specificatii

Cod ETI	002061905
Descriere	EFI-P4R B G/KV 100/0.03
Denumire clasă	Diferen ial RCCB
Curent nominal (A)	100
Tip	B
Curent de defect nominal (A)	0.03
Tip curent	AC
Tensiunea nominală(V)	400
Tip montaj	TH 35
Adâncime (mm)	71
Număr de poli	4
Grad de protec ie IP	IP20
Frecven ă nominală (Hz)	50/60
Standarde	IEC/EN 61008-1
Sec iune transversală nominală	1-50
Timp de declansare	G/KV (timp scurt)
Curent nominal de scurtcircuit Inc (kA)	10

Pagina de produse online


Alta documentatie

Catalog caracteristici tehnice
Model 3D
Manual de instructiuni
Declaratie CE
COM_ETISTORE_ITEM_DOCTYPE_whitePaper
Eplan mușchi

ETIM clasificare internationala

Clasificare	EC000003
Denumire clasă	Residual current circuit breaker (RCCB)
Number of poles	4
Rated voltage	400V
Rated current	100A
Rated fault current	30mA
Rated insulation voltage Ui	500V
Rated impulse withstand voltage Uimp	4kV
Mounting method	DIN rail
Leakage current type	AC
Selective protection	
Short-time delayed tripping	1
Short-circuit breaking capacity (Icw)	10kA
Surge current capacity	3kA
Frequency	50/60 Hz
Additional equipment possible	1
With interlocking device	
Degree of protection (IP)	IP20
Width in number of modular spacings	4
Built-in depth	71mm
Ambient temperature during operating	-25...40°C
Pollution degree	2
Connectable conductor cross section multi-wired	1...50mm²
Connectable conductor cross section solid-core	1...50mm²

Desen cotat

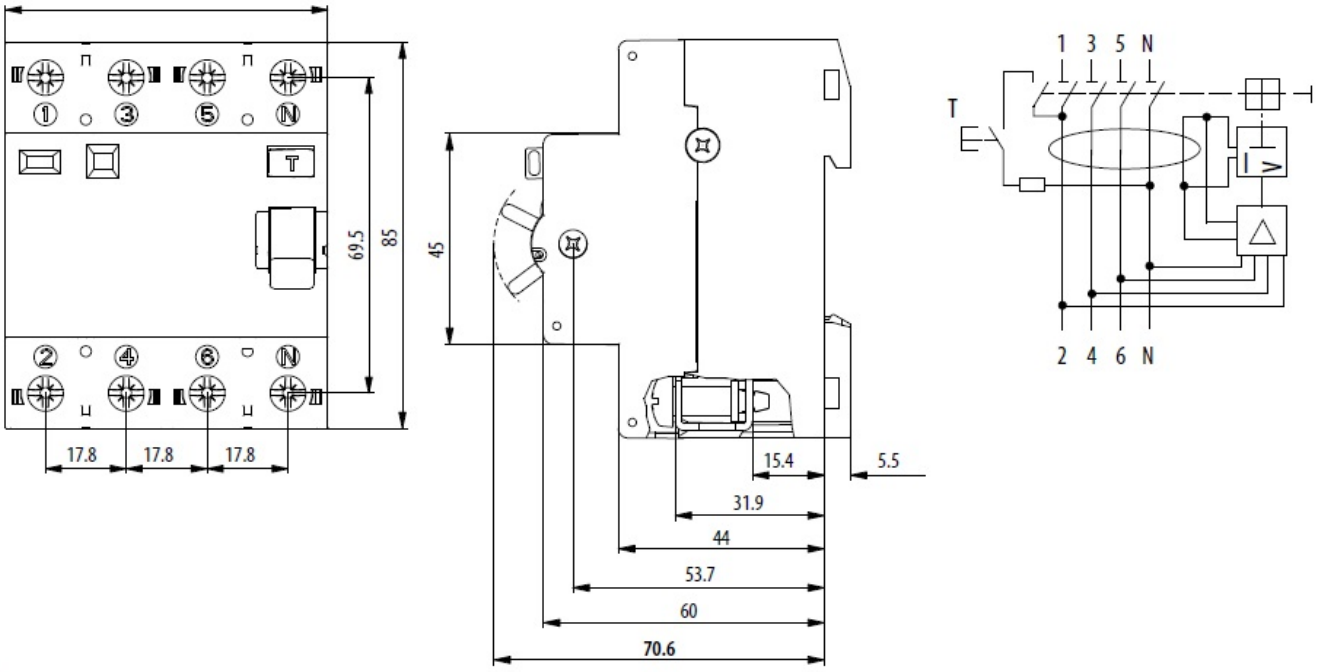

Schema de conexiuni

