


# FUSEHOLDERS FOR CYLINDRICAL DC FUSE-LINKS



## Advantages of DC fuseholder EFH

→ More space for finger to open fuse carrier

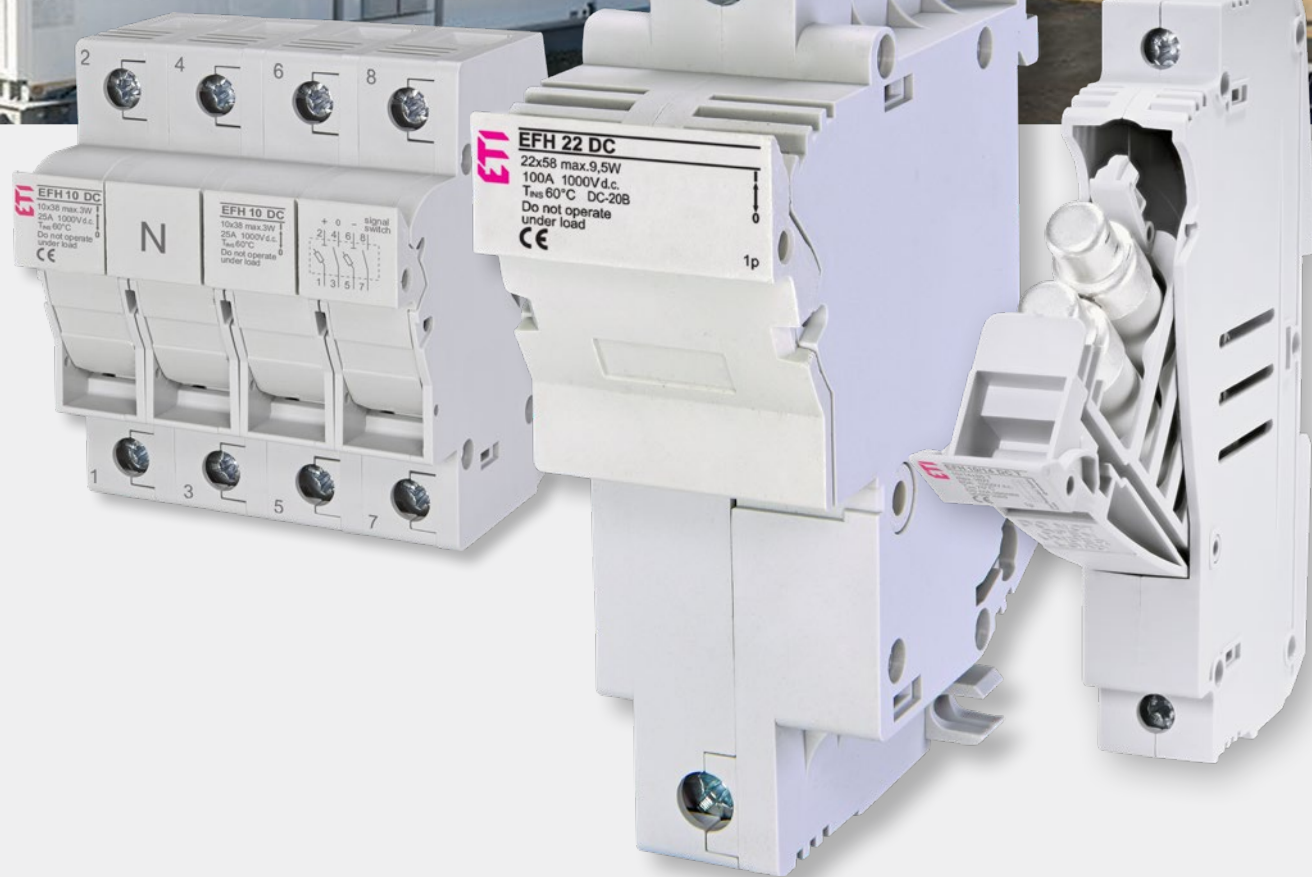


→ Compliance with IEC 60947-1, IEC 60947-3, UL 4248-1, UL 4248-19




→ Mounting on standard DIN 35 mm rail (DIN EN60715)

→ All contact surfaces are silver plated



→ Complete protection against touch according to IP20



→ Possibility of sealing in ON or OFF positions


→ All plastic parts are made of material resistant to extremely high temperatures. Fuse carrier assures that a fuse-link is not in touch with a housing



→ For both sizes a **version with electronic indicator** is available. Marked with **L (LED)**, the EFH has a built-in LED diode which blinks after the fuse-link operates. Operating voltage ranges from 50V to 1000V d.c.




→ Modular design – it is possible to assemble multi-pole versions at the building site





### EFH 22 d.c.

| Number of poles | $U_e/U_i$ [V] | $I_{max.}$ [A] | Code No.  | Max. power dissipation of the fuse-link per pole [W] | Indicator | Weight [g] | Pack. [pcs] |
|-----------------|---------------|----------------|-----------|--|-----------|------------|-------------|
| 1p              | 1000          | 100            | 002570201 | 9,5  | -         | 156        | 3/105       |
|                 |               |                | 002570211 |  | LED       | 158        |             |
| 002570203       |               |                | -         |  | 317       | 2/34       |             |
| 002570213       |               |                | LED       |  | 321       |            |             |

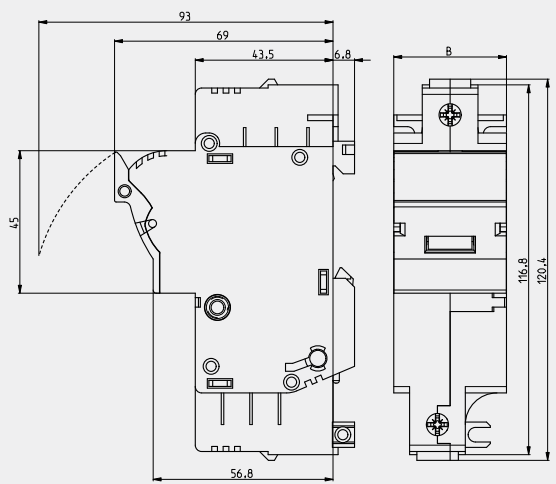

| Type   | Dimensions [mm] |
|--------|-----------------|
|        | B               |
| 1 pole | 35,6            |
| 2 pole | 71,2            |

C fuse - holders