



- **Multifunctions monitoring relays (AC current monitoring in 1-phase network, with adjustable thresholds and adjustable hysteresis)**
- Monitoring windowfunction and histeresis • Timing adjustment of tripping delay • Supply voltage = monitored phase voltage
- Output: 1 CO (1 changeover contact)
- Cover - modular, width 17,5 mm
- Direct mounting on 35 mm rail mount acc. to EN 60715
- Recognitions, certifications, directives: RoHS, **CE**


Output circuit - contact data

| | | |
|---|---|--|
| Number and type of contacts | 1 CO | |
| Rated voltage | 250 V AC | |
| Max. breaking capacity | AC1 | 1 250 VA (5 A / 250 V AC) |
| Max. operating frequency | 3 600 cycles/hour | |
| • at resistive load 100 VA | 360 cycles/hour | |
| • at resistive load 1 000 VA | | |
| Input circuit | | |
| Supply voltage | AC | 230 V terminals (N)-Li |
| Rated voltage | AC | 230 V |
| Must release voltage | AC: $\geq 0,2 U_n$ | |
| Operating range of supply voltage | 0,85...1,15 U_n | |
| Rated power consumption | AC | 5,0 VA / 0,8 W |
| Range of supply frequency | AC | 48...63 Hz |
| Duty cycle | 100% | |
| Measuring circuit | <ul style="list-style-type: none"> • measuring variable • measuring inputs • overload capacity • starting current • input resistance • swiching threshold • hysteresis H | AC sinus, 48...63 Hz AC: 10 A / 230 V AC terminals (N)-Li-Lk 13 A 1 s: 100 A 3 s: 50 A 3 m Ω MIN: 0,05...0,95 I_n MAX: 0,1...1,0 I_n adjustable setting |
| Insulation according to EN 60664-1 | | |
| Rated surge voltage | 4 000 V 1,2 / 50 μ s | |
| Overvoltage category | III | |
| Insulation pollution degree | 2 | if built-in: 3 |
| General data | | |
| Electrical life | • resistive AC1 | > 2 x 10 ⁵ 1 000 VA |
| Mechanical life (cycles) | > 2 x 10 ⁷ | |
| Dimensions (L x W x H) | 87 x 17,5 x 65 mm | |
| Weight | 72 g | |
| Ambient temperature | <ul style="list-style-type: none"> • storage • operating | -25...+70 °C -25...+55 °C |
| (non-condensation and/or icing) | | |
| Cover protection category | IP 20 | EN 60529 |
| Relative humidity | 15...85% | |
| Shock resistance | 15 g 11 ms | |
| Vibration resistance | 0,35 mm DA 10...55 Hz | |
| Meassuring circuit data | | |
| Functions | OVER, OVER+LATCH, UNDER, UNDER+LATCH, WIN, WIN+LATCH monitoring windowfunction and histeresis | |
| Range of delay timing adjustment | tripping delay: 0,1...10 s | |
| Base accuracy | $\pm 5\%$ (calculated from the final range values) | |
| Setting accuracy | $\pm 5\%$ (calculated from the final range values) | |
| Repeatability | $\pm 2\%$ | |
| Temperature influence | $\pm 1\%$ / °C | |
| Recovery time | 500 ms | |
| LED indicator | green LED U ON - indication of supply voltage U red LEDs MIN and MAX ON/OFF - indication of failure ❶ red LEDs MIN and MAX flashing - indication of tripping delay ❶ yellow LED R ON/OFF - output relay status | |

❶ Indication of relay status - according to the set threshold.

Functions


OVER, OVER+LATCH - Overcurrent monitoring, overcurrent monitoring with fault latch.

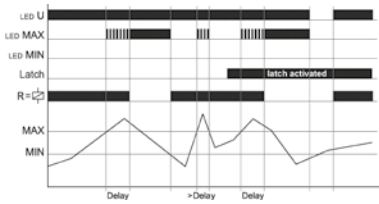

When the supply voltage U is applied, the output relay R switches into on-position, if the measured current is below the MAX-value. When the measured current exceeds the MAX-value, the output relay R switches into off-position after the interval of the tripping delay (Delay) has expired. **OVER**: the output relay R switches into on-position again, if the current falls below the MIN-value.

OVER+LATCH: the output relay R switches only into on-position again by interrupting and re-applying of the supply voltage, provided that the measured current is below the MAX-value.

UNDER, UNDER+LATCH - Undercurrent monitoring, undercurrent monitoring with fault latch.

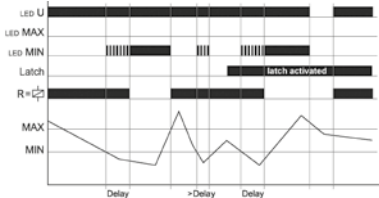


When the supply voltage U is applied, the output relay R switches into on-position, if the measured current is beyond the MIN-value. When the measured current falls below the MIN-value, the output relay R switches into off-position after the interval of the tripping delay (Delay) has expired. **UNDER**: the output relay R switches into on-position again, if the current exceeds the MIN-value.

UNDER+LATCH: the output relay R switches only into on-position again by interrupting and re-applying of the supply voltage, provided that the measured current is beyond the MIN-value.

U - supply voltage; **R** - output state of the relay; **MIN, MAX** - relay status; **SEQ** - phase sequence

WIN, WIN+LATCH - Current monitoring in windowfunction between MIN and MAX values, current monitoring in windowfunction between MIN and MAX values with fault latch.

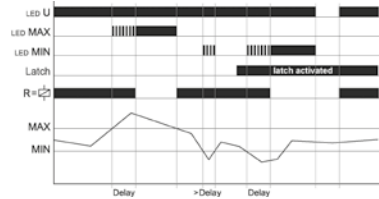


When the supply voltage U is applied, the output relay R switches into on-position, if the measured current is within the adjusted window. When the measured current leaves the window between MIN and MAX, the output relay R switches into off-position after the interval of the tripping delay (Delay) has expired.


WIN: the output relay R switches into on-position again, if the current re-enter the adjusted window.

WIN+LATCH: the output relay R switches only into on-position again by interrupting and re-applying of the supply voltage, provided that the measured current is within the threshold values.


Front panel description

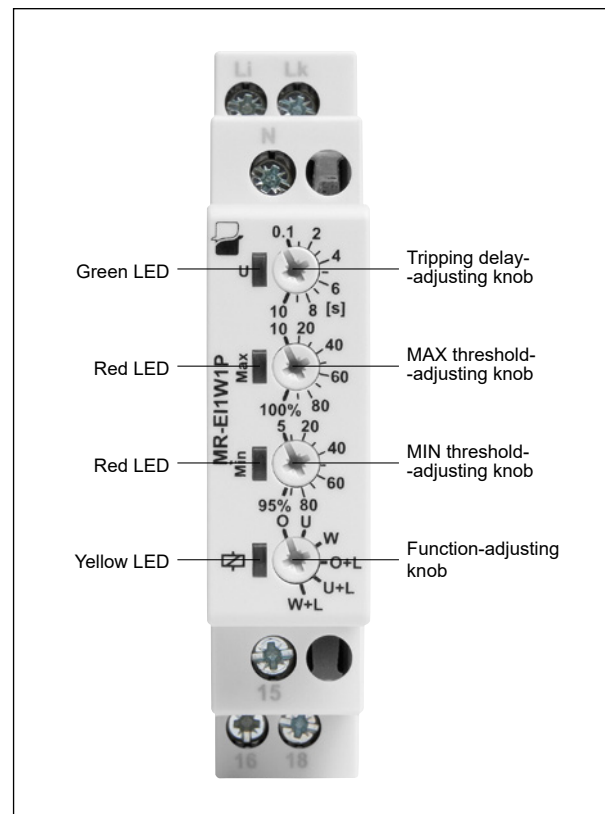

Dimensions

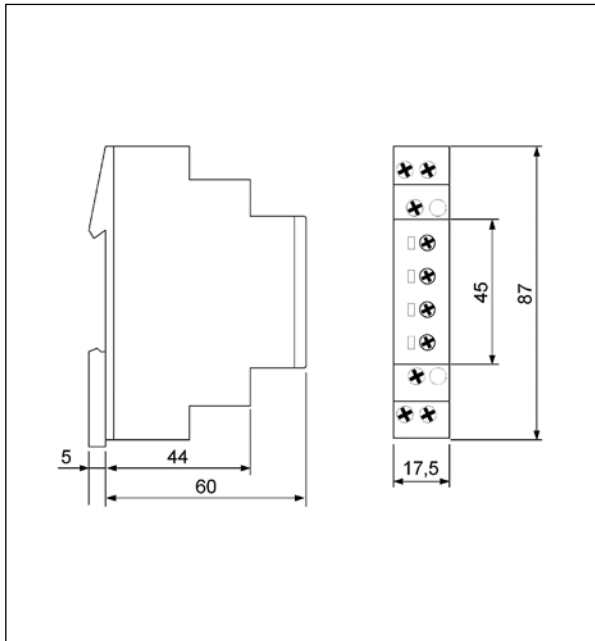


Connection diagrams

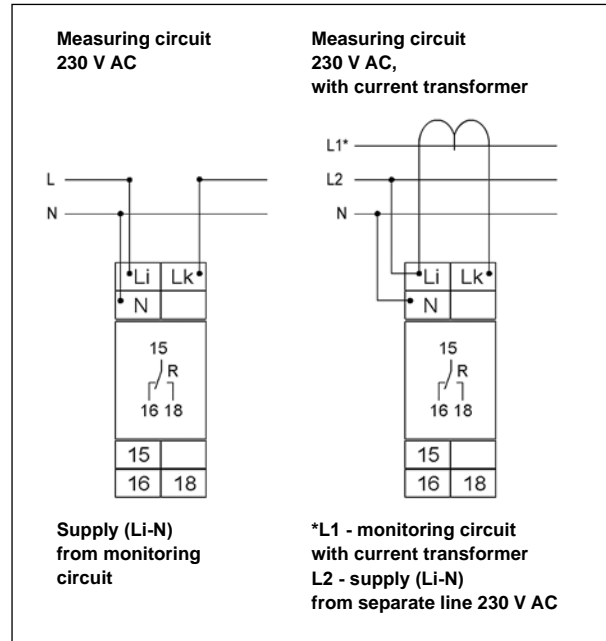

Mounting

Relays **MR-EI1W1P** are designed for direct mounting on 35 mm rail mount acc. to EN 60715. Operational position - any. **Terminals - cross section of the connection cables:** 1 x 0,5 ... 2,5 mm² with/without multicore cable end, 1 x 4 mm² without multicore cable end, 2 x 0,5 ... 1,5 mm² with/without multicore cable end, 2 x 2,5 mm² flexible without multicore cable end.

Ordering codes

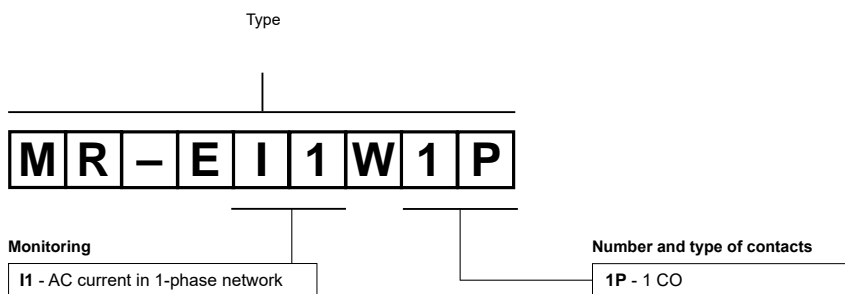

Example of ordering code:

MR-EI1W1P

monitoring relay **MR-EI1W1P**, multifunction (relay perform 6 functions), cover - modular, width 17,5 mm, one changeover contact, rated input voltage (supply): AC - 230 V; monitoring current: max. 10 A / 230 V AC