

## Miniature and auxiliary contactor CEC


### Application:


Miniature contactors are used to remotely control and protect (in combination with overload relays) electric motors and other electric loads with nominal power up to 7,5kW (at 400V AC3 duty), and auxiliary contactors are used for realizing a wide range of control circuits.

### Advantages:

- Mounting on DIN rail and mounting plates
- Small size and high technical performance
- Low power loss (current heat loss)
- Protection against direct contact from front (IEC 536) IP20
- Wide range of accessories
- Surge suppressor (as option)
- Reversing starter with mechanical interlock
- Control voltage 24VAC, 48VAC, 110VAC, 230VAC, 400VAC, 24 VDC, 48 VDC, 110 VDC, 220 VDC

### Example of CEC configuration:

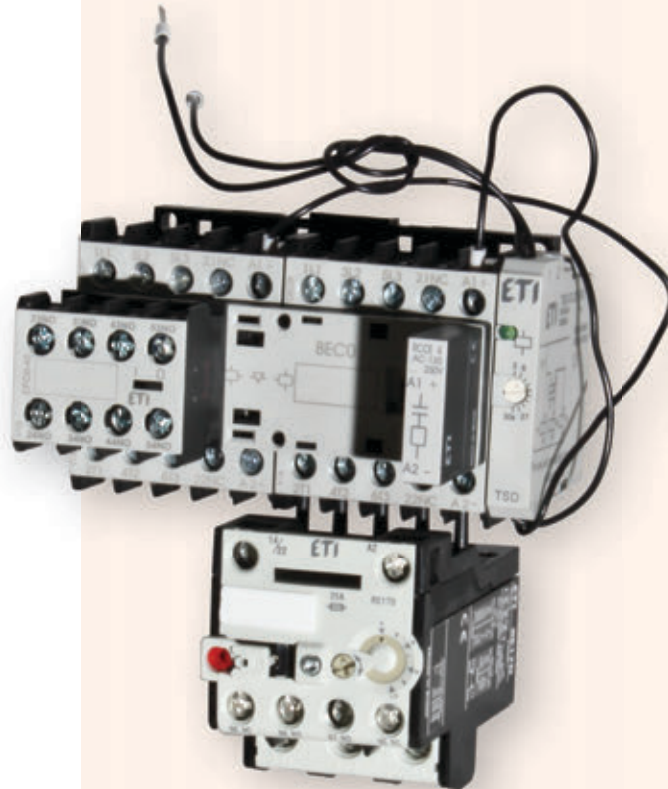

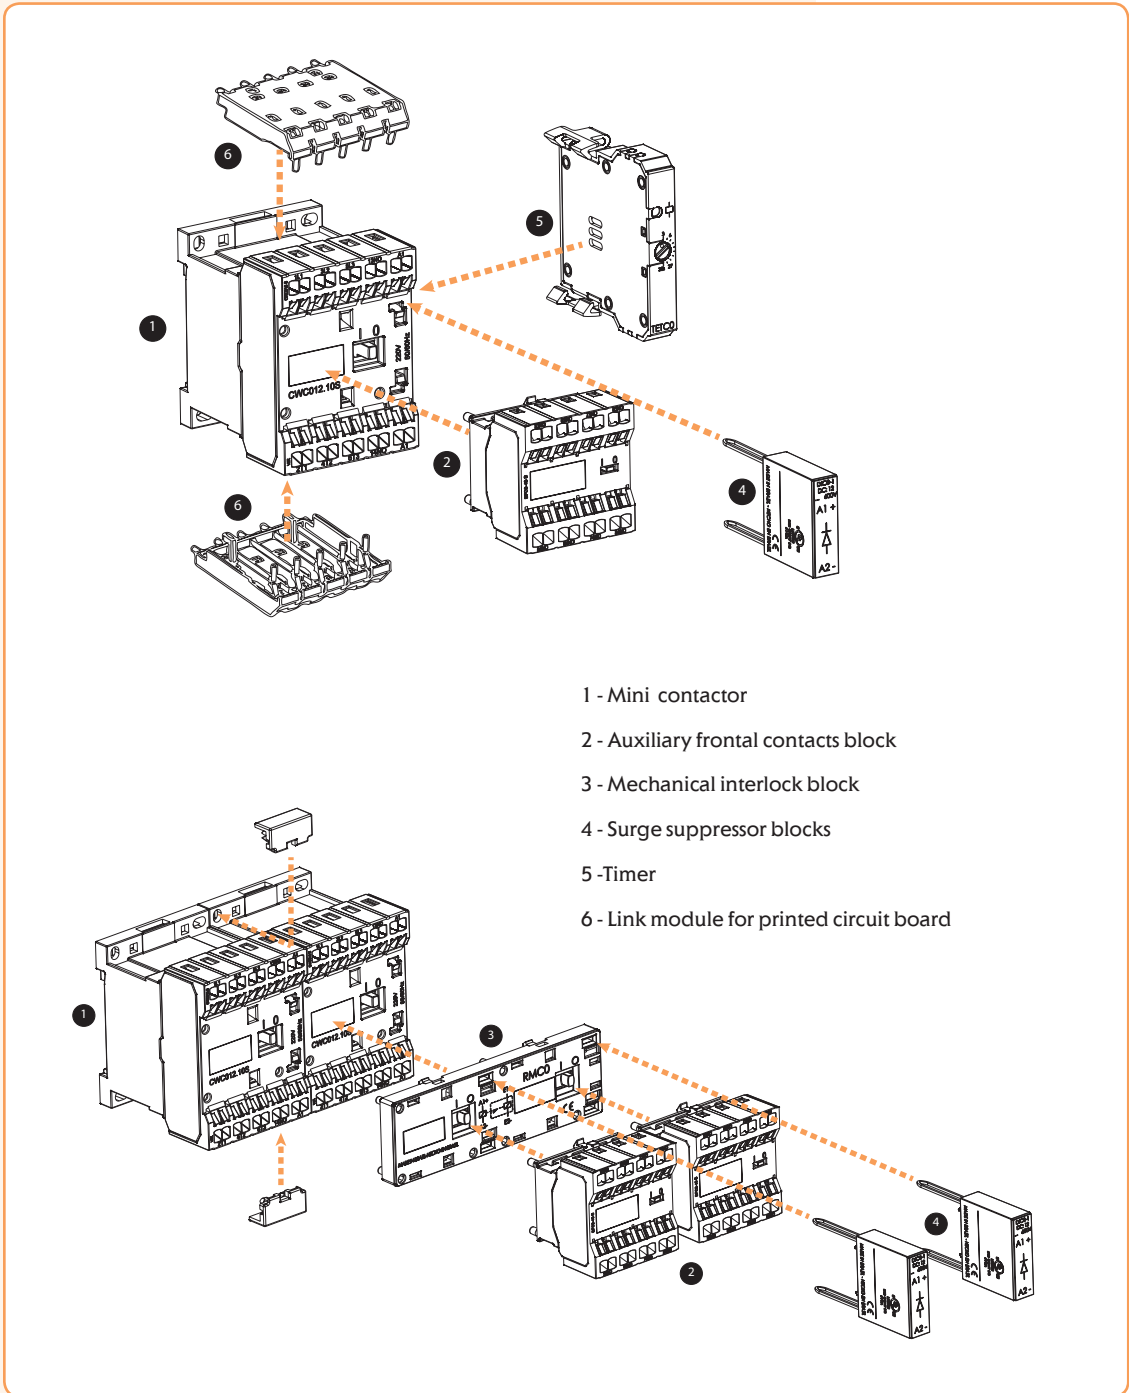

**Electronic timing relays**

Type	Code No.	Time	Supply Voltage	Weight [g]	Packaging [pcs]
<b>ON delay</b>					
TOE-3-24-240	004642730	0,3-3 sec	24-240V AC/DC	126	1
TOE-10-24-240	004642731	1-10 sec			
TOE-30-24-240	004642732	3-30 sec			
TOE-60-24-240	004642733	6-60 sec			
TOE-100-24-240	004642734	10-100 sec			
TOE-300-24-240	004642735	30-300 sec			
TOE-1800-24-240	004642736	180-1800 sec			
<b>OFF delay</b>					
TOD-3-24-60	004642740	0,3-3 sec	24-60V AC/DC	126	1
TOD-10-24-60	004642741	1-10 sec			
TOD-30-24-60	004642742	3-30 sec			
TOD-60-24-60	004642743	6-60 sec			
TOD-100-24-60	004642744	10-100 sec			
TOD-300-24-60	004642745	30-300 sec			
TOD-1800-24-60	004642746	180-1800 sec			
TOD-3-100-240	004642747	0,3-3 sec	110-240V AC/DC	126	1
TOD-10-100-240	004642748	1-10 sec			
TOD-30-100-240	004642749	3-30 sec			
TOD-60-100-240	004642750	6-60 sec			
TOD-100-100-240	004642751	10-100 sec			
TOD-300-100-240	004642752	30-300 sec			
TOD-1800-100-240	004642753	180-1800 sec			
<b>Star-delta</b>					
TSD-30-24-28	004642760	3-30 sec	24-48V AC	126	1
TSD-30-110-130	004642761		110-130V AC		
TSD-30-220-240	004642762		220 - 240V AC		



## Technical data

Auxiliary contact block			
Standards		IEC 60947-5-1, IEC 60947-4-1	
Rated Insulation voltage $U_i$	IEC, VDE 0660		1000
Rated operational voltage $U_e$	IEC, VDE 0660	(V)	690
Conv. thermal current $I_{th}$		A	10
Rated operational current ( $I_e$ )			
AC-15(IEC 60947-5-1)	$U_e \leq 240V$	(A)	10
	380-400V	(A)	6
	415-440V	(A)	6
	500V	(A)	4
	660-690V	(A)	-
UL, CSA 1)			A600
DC-13(IEC 60947-5-1)	24V	(A)	1,5
	60V	(A)	0,5
	110V	(A)	0,4
	220-240V	(A)	0,4
UL, CSA 1)			Q600
Short circuit protection max. fuse gL/gG		(A)	10
Control circuit reliability		(V / mA)	17 / 5
Electrical life span		c. op.	1.000.000
Mechanical life span		c. op.	10.000.000
Nr. of conductors and cross section	Stranded without end sleeve	mm <sup>2</sup>	2x (0,5...2,5)
Tightening torque		Nm	0,8...1,5

## Electronic timer blocks TOE, TOD, TSD

Inputs	Rated insulation voltage ( $U_i$ )	V	300	
	Supply voltage ( $U_c$ )	1 - 2 terminals	V	24...240 V AC/DC 50/60 Hz (TOE)
				24...60 V AC/DC 50/60 Hz (TOD)
				100...60 V AC/DC 50/60 Hz (TOD)
				220-240 V AC 50/60 Hz (TSD)
				110-130 V AC (TSD)
	24-28 V AC 50/60 Hz (TSD)			
Command ( $U_c$ ) (only TOD)	2 - B1 terminals	V	24...60 V AC/DC 50/60 Hz (TOD) 100...240 V AC/DC 50/60 Hz (TOD)	
Voltage limits			0,85 - 1,1 x $U_c$ -> AC 0,8 - 1,25 x $U_c$ -> DC	
Consumption		mA	$\leq 5$	
Time adjustment	Min. time for Reset	ms	100	
	Min. command time (only TOD)	ms	50	
	Setting accuracy (% of the full scale value)	%	+/-5	
	Repeat accuracy	%	+/-1	
Changeover time Y - $\Delta$		ms	50	

## Diagrams

Function	ON Delay TOE		OFF Delay TOD		Star - delta TSD	
Functional diagram						
LED on						
LED off						
Schemes	Terminals		Terminals		Terminals	
	1		(+)1		1	
	2		B1		2	
			(-)2		D	
		B2		Y		