


ELECTRIC POWER DISTRIBUTION

ETI provides high-quality solutions for the protection of low and high-voltage electrical installations in the field of electric power distribution. We supply a wide range of high-voltage fuse-links of the type VV, low voltage power circuit breakers ETIBREAK, distribution cabinets KVS, medium voltage surge arresters ETISURGE and ceramic as well as polymeric insulators. The products are internationally certified and carry several quality marks.

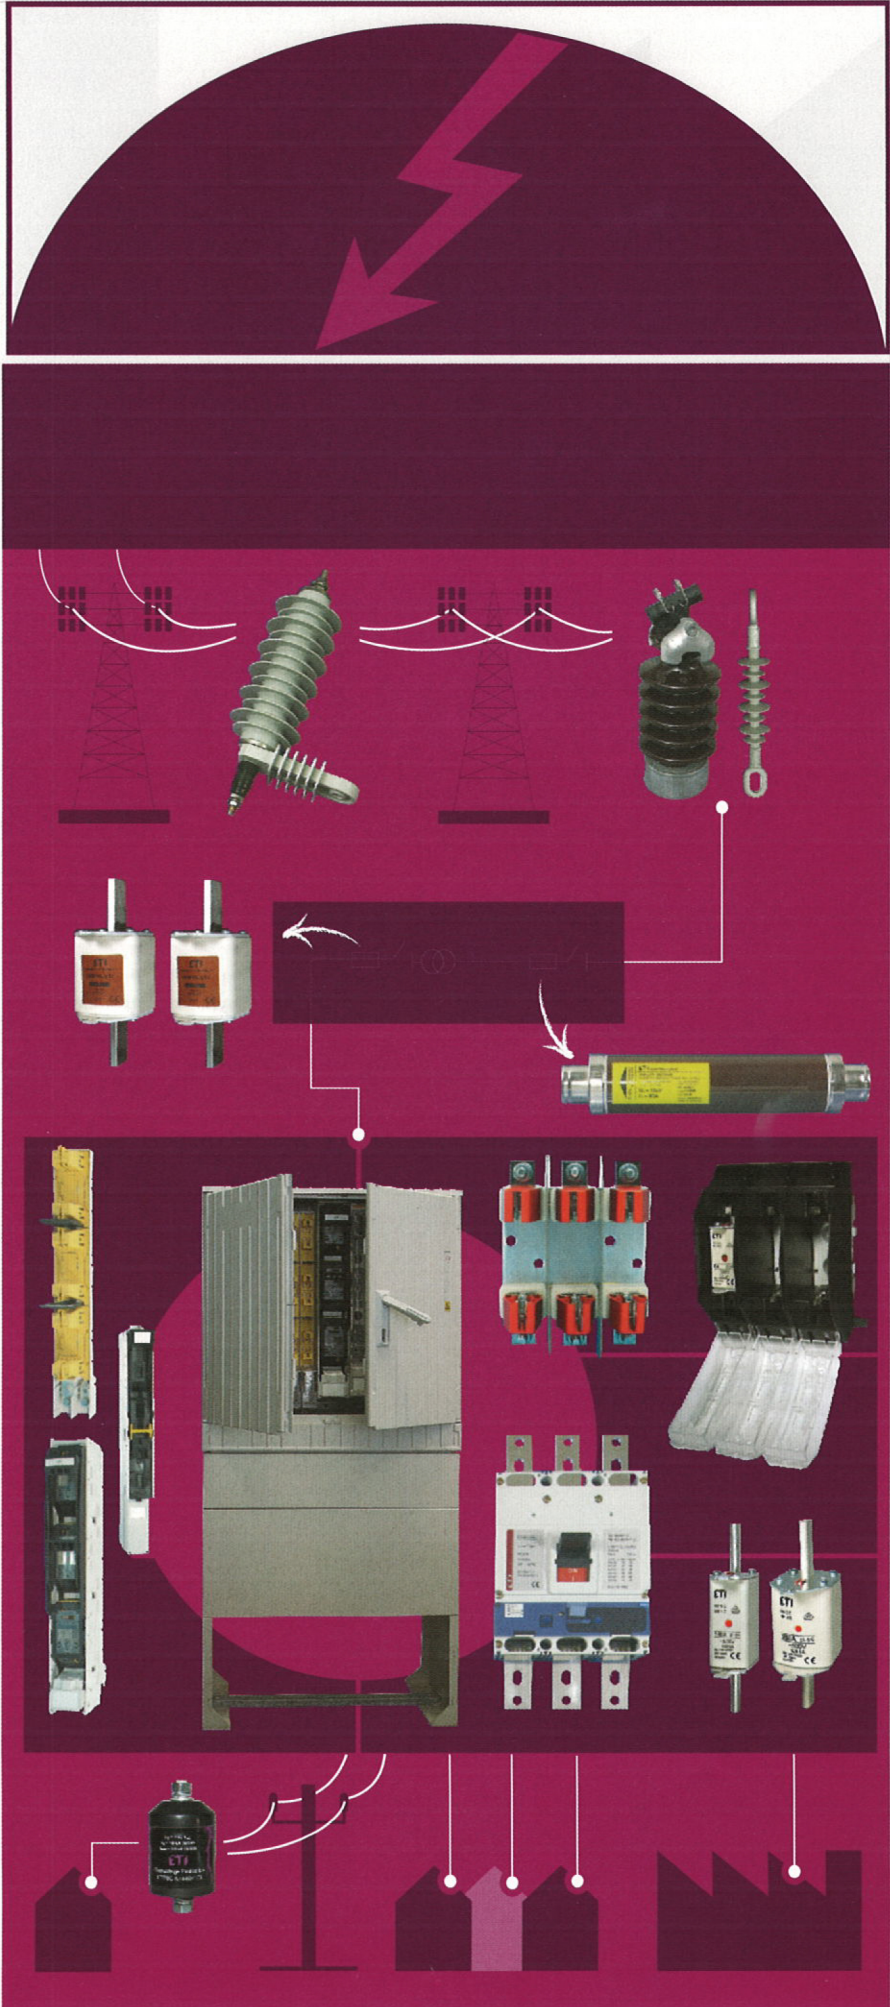

Low breaking capacity moulded case circuit breakers

Advantages of low breaking capacity MCCBs


→ New series EB2S of MCCBs has excellent performances with reduced dimensions and new modern design.

→ Unique accessory cover opens with only one screw.

→ Practical internal accessories can be installed with one touch:

- auxiliary switch
- alarm switch
- shunt trip unit
- undervoltage trip unit

→ EB2S series complies to safety recommendation standard IEC 60204-1. EB2S is marked with IEC symbol "direct opening action". This makes these devices also ideal for all OEM applications where safety and reliability are essential.

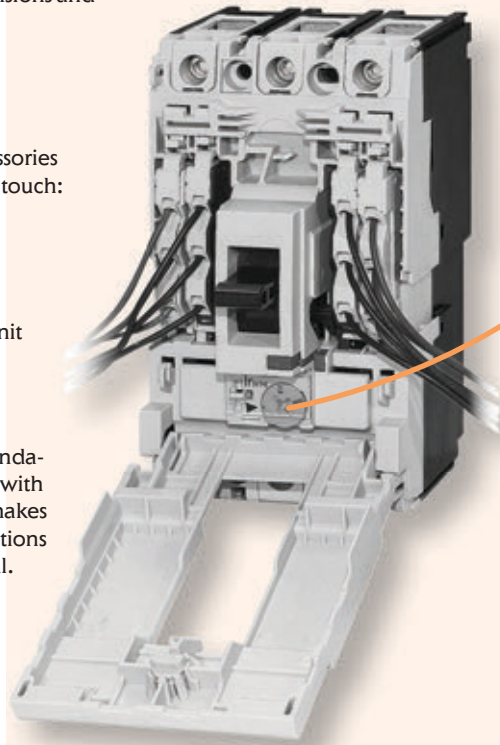

→ Customer can select between fixed and adjustable protection:

- Frame size 160A: fixed (series LF, SF & HF) or thermal trip adjustable (series LA, SA & HA)
- Frame size 250A: fixed (series LF, SF & HF) or thermal-magnetic trip adjustable (series LA, SA & HA)

Legend: L -> economic, lower short-circuit breaking capacity
 S -> standard short-circuit breaking capacity
 H -> high short-circuit breaking capacity

EB2S 160 fixed protection

Type	I_n (A)	Code No.	Poles	I_{cu}/I_{cs} 400V [kA]	Adjustment thermal/magnetic	Weight [kg]	Packaging [pcs]
EB2S 160/3LF 16A 3p	16	004671801	3	16/8	fixed/adjusted	0,80	1
EB2S 160/3LF 20A 3p	20	004671802					
EB2S 160/3LF 25A 3p	25	004671803					
EB2S 160/3LF 32A 3p	32	004671804					
EB2S 160/3LF 40A 3p	40	004671805					
EB2S 160/3LF 50A 3p	50	004671806					
EB2S 160/3LF 63A 3p	63	004671807					
EB2S 160/3LF 80A 3p	80	004671808					
EB2S 160/3LF 100A 3p	100	004671809					
EB2S 160/3LF 125A 3p	125	004671810					
EB2S 160/3LF 160A 3p	160	004671811	4	16/8	fixed/adjusted	1,00	
EB2S 160/4LF 16A 4p	16	004671814					
EB2S 160/4LF 20A 4p	20	004671815					
EB2S 160/4LF 25A 4p	25	004671816					
EB2S 160/4LF 32A 4p	32	004671817					
EB2S 160/4LF 40A 4p	40	004671818					
EB2S 160/4LF 50A 4p	50	004671819					
EB2S 160/4LF 63A 4p	63	004671820					
EB2S 160/4LF 80A 4p	80	004671821					
EB2S 160/4LF 100A 4p	100	004671822					
EB2S 160/4LF 125A 4p	125	004671823					
EB2S 160/4LF 160A 4p	160	004671824					

ETIBREAK EB2 125							
Type	I_n [A]	Code No.	Poles	I_{cu}/I_{cs} 400/415V [kA]	Adjustment thermal/magnetic	Weight [kg]	Packaging [pcs]
EB2 125/3L 20A 3p	20	004671021	3	25/19	0,63-1/6-12	1,1	1
EB2 125/3L 32A 3p	32	004671022			0,63-1/6-12		
EB2 125/3L 50A 3p	50	004671023			0,63-1/6-12		
EB2 125/3L 63A 3p	63	004671024			0,63-1/6-12		
EB2 125/3L 100A 3p	100	004671025			0,63-1/6-12		
EB2 125/3L 125A 3p	125	004671026			0,63-1/6-10		
EB2 125/4L 20A 4p	20	004671027	4	36/36	0,63-1/6-12	1,4	1
EB2 125/4L 32A 4p	32	004671028			0,63-1/6-12		
EB2 125/4L 50A 4p	50	004671029			0,63-1/6-12		
EB2 125/4L 63A 4p	63	004671030			0,63-1/6-12		
EB2 125/4L 100A 4p	100	004671031			0,63-1/6-12		
EB2 125/4L 125A 4p	125	004671032			0,63-1/6-10		
EB2 125/3S 20A 3p	20	004671041	3	36/36	0,63-1/6-12	1,1	1
EB2 125/3S 32A 3p	32	004671042			0,63-1/6-12		
EB2 125/3S 50A 3p	50	004671043			0,63-1/6-12		
EB2 125/3S 63A 3p	63	004671044			0,63-1/6-12		
EB2 125/3S 100A 3p	100	004671045			0,63-1/6-12		
EB2 125/3S 125A 3p	125	004671046			0,63-1/6-10		
EB2 125/4S 20A 4p	20	004671047	4	65/36	0,63-1/6-12	1,4	1
EB2 125/4S 32A 4p	32	004671048			0,63-1/6-12		
EB2 125/4S 50A 4p	50	004671049			0,63-1/6-12		
EB2 125/4S 63A 4p	63	004671050			0,63-1/6-12		
EB2 125/4S 100A 4p	100	004671051			0,63-1/6-12		
EB2 125/4S 125A 4p	125	004671052			0,63-1/6-10		
EB2 125/3H 20A 3p	20	004672101	3	65/36	0,63-1/6-12	1,1	1
EB2 125/3H 32A 3p	32	004672102			0,63-1/6-12		
EB2 125/3H 50A 3p	50	004672103			0,63-1/6-12		
EB2 125/3H 63A 3p	63	004672104			0,63-1/6-12		
EB2 125/3H 100A 3p	100	004672105			0,63-1/6-12		
EB2 125/3H 125A 3p	125	004672106			0,63-1/6-10		
EB2 125/4H 20A 4p	20	004672107	4	65/36	0,63-1/6-12	1,4	1
EB2 125/4H 32A 4p	32	004672108			0,63-1/6-12		
EB2 125/4H 50A 4p	50	004672109			0,63-1/6-12		
EB2 125/4H 63A 4p	63	004672110			0,63-1/6-12		
EB2 125/4H 100A 4p	100	004672111			0,63-1/6-12		
EB2 125/4H 125A 4p	125	004672112			0,63-1/6-10		



Technical data

Low voltage moulded case circuit breaker EB2

Product series	description	unit	condition	EB2 125			EB2 160	
Model-type				L	S	H	S	H
Number of poles				3, 4			3, 4	
Nominal current ratings								
	I_n	(A)	50°C	20,32,50,			160	
				63,100,125				
Electrical characteristics								
Rated operational voltage	U_e	(V)	AC 50/60 Hz	690	690	690	690	690
			DC	250	250	250	250	250
Rated insulation voltage	U_i	(V)		800	800	800	800	800
Rated impulse withstand voltage	U_{imp}	(kV)		8	8	8	8	8
Ultimate breaking capacity (IEC, JIS, AS/NZS)	I_{cu}	(kA)	690V AC	-	6	6	7.5	7.5
			525V AC	8	22	25	25	25
			440V AC	15	25	50	25	50
			400/415V AC	25	36	65	36	65
			220/240V AC	35	50	85	65	85
			250V DC	25	25	40	40	40
Service breaking capacity (IEC, JIS, AS/NZS)	I_{cs}	(kA)	690V AC	-	6	6	7.5	7.5
			525V AC	6	22	22	25	25
			440V AC	12	25	25	25	25
			400/415V AC	19	36/30	36/33	36	36
			220/240V AC	27	50	85	65	85
			250V DC	19	19	40	40	40
Rated breaking capacity (NEMA)		(kA)	480V AC	8	22	25	22	25
			240VAC	35	50	85	65	85
Protection								
Adjustable thermal, adjustable magnetic				■	■		■	
Fixed thermal, fixed magnetic				■				
Microprocessor								
Utilisation category				A	A		A	
Installation								
Front connection				■	■		■	
Attached flat bar				•	•		•	
Solderless terminal (cable clamp)				•	•		•	
Rear connection				•	•		•	
Plug-in				•	•		•	
Draw-out				-	-		-	
DIN rail mounting				•	•		-	
Dimensions	h	(mm)		155	155		165	
			w	(mm)	3 pole	90	90	105
				4 pole	120	120	140	
	d	(mm)		68	68		68	
Weight	W	(kg)	3 pole	1.1	1.1		1.5	
			4 pole	1.4	1.4		1.9	
Operation								
Direct Opening Action				■	■		■	
Toggle operation				■	■		■	
Variable depth / direct mount operating handle				•	•		•	
Motor operator				•	•		•	
Endurance	Electrical	cycles	415V AC	30000	30000		20000	
	Mechanical	cycles		30000	30000		30000	
Standards				IEC 60947-2, EN 60947-2				

■ Standard • Optional - Not Available