



4G

Cam switches

Diagram number	Number of poles	Rated switching current	Rated voltage	Number of packs	Symbol Article No.	Handle	Protection degree IP from the front	Maximum conductor cross-section [mm ²]	Installation
„Mains-unit” switch (1-O-2)									
	1	10	690	1	4G10-51-U 63-840338-011	R014	IP40	2 x 2,5	to be mounted behind the panel
	1	10	690	1	4G10-51-PK 63-840340-011	R014	IP55	2 x 2,5	in a housing
	1	10	690	1	4G10-51-PK IP65 63-840340-111	R014	IP65	2 x 2,5	in a housing
	2	10	690	2	4G10-52-U 63-840341-011	R014	IP40	2 x 2,5	to be mounted behind the panel
	3	10	690	3	4G10-53-U 63-840343-011	R014	IP40	2 x 2,5	to be mounted behind the panel
	3	16	690	3	4G16-53-U 63-840343-021	R114	IP40	2 x 4	to be mounted behind the panel
	3	25	690	3	4G25-53-U 63-840343-031	R114	IP40	2 x 6	to be mounted behind the panel
	3	40	690	3	4G40-53-U 63-840343-041	R214	IP40	2 x 10	to be mounted behind the panel
	3	63	690	3	4G63-53-U 63-840343-051	R214	IP40	2 x 10	to be mounted behind the panel
	3	80	690	3	4G80-53-U 63-840343-061	R214	IP40	25	to be mounted behind the panel
	3	10	690	3	4G10-53-PK 63-840345-011	R014	IP55	2 x 2,5	in a housing
	3	10	690	3	4G10-53-PK IP65 63-840345-111	R014	IP65	2 x 2,5	in a housing
	3	16	690	3	4G16-53-PK 63-840345-021	R114	IP55	2 x 4	in a housing
	3	25	690	3	4G25-53-PK 63-840345-031	R114	IP55	2 x 6	in a housing
	3	40	690	3	4G40-53-PK 63-840345-041	R214	IP55	2 x 10	in a housing
	3	63	690	3	4G63-53-PK 63-840345-051	R214	IP55	2 x 10	in a housing
	3	80	690	3	4G80-53-PK 63-840345-061	R214	IP55	25	in a housing
	„Rotation direction change” switch (L-O-P)								
	3	10	690	3	4G10-11-U 63-840307-011	R014	IP40	2 x 2,5	to be mounted behind the panel
	3	16	690	3	4G16-11-U 63-840307-021	R114	IP40	2 x 4	to be mounted behind the panel
	3	25	690	3	4G25-11-U 63-840307-031	R114	IP40	2 x 6	to be mounted behind the panel
	3	40	690	3	4G40-11-U 63-840307-041	R214	IP40	2 x 10	to be mounted behind the panel
	3	63	690	3	4G63-11-U 63-840307-051	R214	IP40	2 x 10	to be mounted behind the panel
	3	80	690	3	4G80-11-U 63-840307-061	R214	IP40	25	to be mounted behind the panel












* See dimensions on pages 181-184

Switches with "0"(1-0-2) position

Switches for current transformers (1-2)

Table 140.

Switching program	Diagram number
1-pole	51
2-pole	52
3-pole	53
multi-pole	75
	76
	77
	78
	79
	80
	81

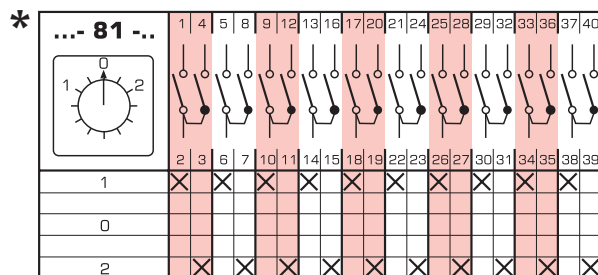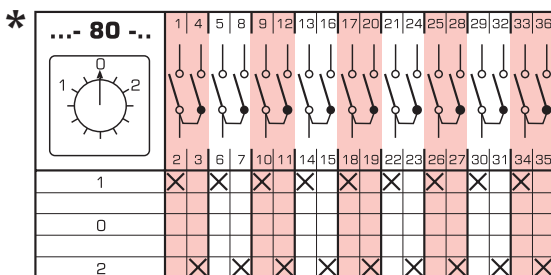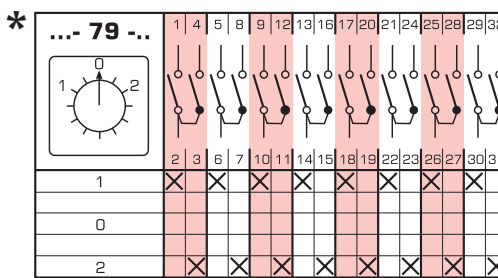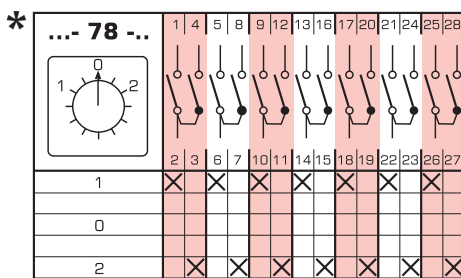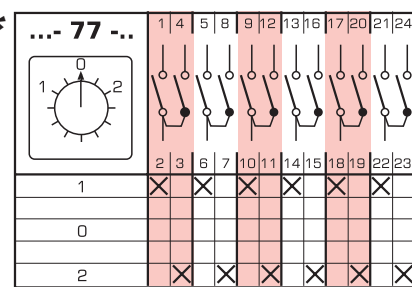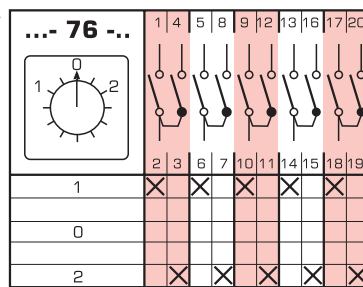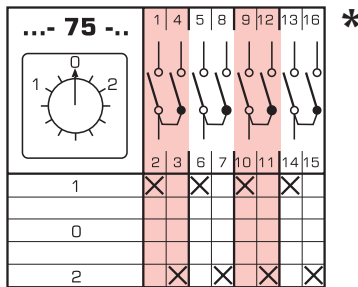

* Only in versions U, OU

* See dimensions on pages 181-184