




- ventilatoare gama "POLO 4,5,6"
- Montare : **pe perete / pe tavan**
- Material : ABS
- Culoare : alb
- Temperatura de lucru : max.+40°C
- Tensiune de lucru : 230V 50Hz
- Grad de protectie: IPx4

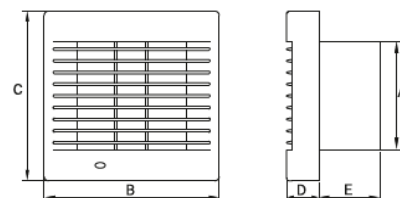


WYMIARY / DIMENSIONS / РАЗМЕРЫ					
	A	B	C	D	E
POLO 4 Ø100	99	156	154	30	55
POLO 5 Ø120	118	181	179	32	59
POLO 6 Ø150	149	209	208	32	69

COD dablerom	TIP	FLUX DE AER (m³/h)	SUNET dB(A)1m	ROTATIE (rot./min)	PUTERE (W)	PACK. (buc)
20-007-0054	standard - Ø100	100	40	2650	15	1/10
20-007-0056	cu cordon - Ø100	100	40	2650	15	1/10
20-007-0058	cu timer (2-23min.) - Ø100	100	40	2650	15	1/10
20-007-0055	cu grila automata - Ø100	100	40	2650	15	1/10
20-007-0061	cu senzor umiditate & timer Ø100	100	40	2650	15	1/10
20-007-0284	cu grila automata & timer - Ø100	100	40	2650	15	1/10
20-007-0275	senzor umid.&grila aut.&timer Ø100	100	40	2650	15	1/10
20-007-0036	standard - Ø120	150	46	2650	17	1/10
20-007-0168	cu cordon - Ø120	150	46	2650	17	1/10
20-007-0037	cu timer (2-23min.) - Ø120	150	46	2650	17	1/10
20-007-0028	cu grila automata - Ø120	150	46	2650	17	1/10
20-007-0114	cu senzor umiditate & timer Ø120	150	46	2650	17	1/10
20-007-0030	cu grila automata & timer - Ø120	150	46	2650	17	1/10
20-007-0032	senzor umid.&grila aut.&timer Ø120	150	46	2650	17	1/10
20-007-0241	standard - Ø150	280	47	2650	20	1/10
20-007-0293	cu cordon - Ø150	280	47	2650	20	1/10
20-007-0242	cu timer (2-23min.) - Ø150	280	47	2650	20	1/10
20-007-0204	cu grila automata - Ø150	280	47	2650	20	1/10
20-007-0270	cu senzor umiditate & timer Ø150	280	47	2650	20	1/10
20-007-0206	cu grila automata & timer - Ø150	280	47	2650	20	1/10
20-007-0229	senzor umid.&grila aut.&timer Ø150	280	47	2650	20	1/10



- ventilatoare gama "POLO 6 OK"
- Montare : **pe geam**
- Material : ABS
- Culoare : alb
- Temperatura de lucru : max.+40°C
- Tensiune de lucru : 230V 50Hz
- Grad de protectie: IPx4

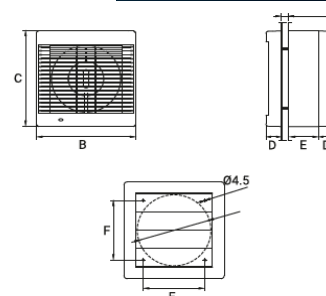

WYMIARY / DIMENSIONS / РАЗМЕРЫ						
	A	B	C	D	E	F
POLO 6 OK	154	209	208	31	62	130

COD dablerom	TIP	FLUX DE AER (m³/h)	SUNET dB(A)1m	ROTATIE (rot./min)	PUTERE (W)	PACK. (buc)
20-007-0313	cu cordon - Ø150	200	47	2650	25	1/10