

CEE 16/32A

CONNECTION TYPES

SCREW TERMINAL


Contact screws

- Accessible from one direction
- Captive and open
- With multi-slot



SCREWLESS CONNECTION TECHNOLOGY TURBO TERMINAL

- Time saving
- Screwless TT-terminal (PCE-patent)
- Open contact terminals, ready for assembly
- Fast cable installation
- Simple closing and opening just by thumb pressure
- Colour-coded terminals

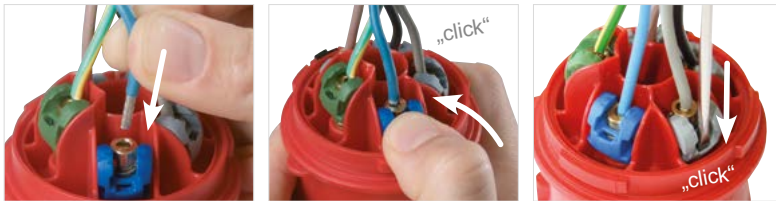

1) Insert wire

2) Close terminal

3) Re-open terminal



For all standard cable diameters

- 16A: up to 2,5mm² flexible, up to 4mm² solid
- 32A: up to 6,0mm² flexible, up to 10mm² solid

Conductors (stripped)

- flexible with or without end sleeve
- or solid wires

ADVANTAGES OF CABLE LOCK GLAND

- Time saving
- Simple insertion of the cable in less time
- Strain relief and sealing of the cable by tightening the cable-lock gland
- Usable for all known cable types
- Self-adjusting gasket for different cable diameters
- Maximum cable security



LOCKING MECHANISM

No screws needed to assemble the plug

- Multi-ramp quick-lock system
- Easy fitting by twist-lock action saves your time




Dismantling (op

- simply unlock and twist to open

CEE Plugs

Plug IP44 SHARK

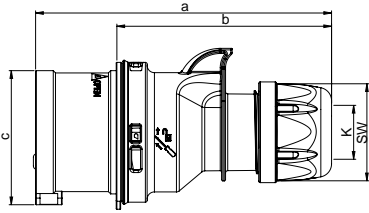


	16 Amp			32 Amp		
	3	4	5	3	4	5
a [mm]	122	128	134	150	150	155
b [mm]	86	92	98	104	104	109
c [mm]	47	53	61	63	63	70
K_cable Ø [mm]	6-15	6-15	8-16	11,5-20	11,5-20	11,5-22
: L U H 2 H [L E Φ H [mmO [mm]	1-2,5			2,5-6		
Contact screws [Ncm]	100			110		
SW [mm]	42	42	42	50	50	50
Weight [g]	109	128	151	181	201	232

- with screw terminals
- housing material: PA6
- contacts: brass
 - to order nickel-plated contacts please add a "v" e.g. 015-6v

IP44 splashproof

Plug IP44 SHARKTT

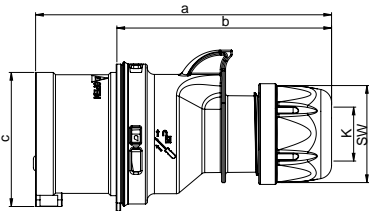


	16 Amp			32 Amp		
	3	4	5	3	4	5
a [mm]	122	128	134	150	150	155
b [mm]	86	92	98	104	104	109
c [mm]	47	53	61	63	63	70
K_cable Ø [mm]	6-15	6-15	8-16	11,5-20	11,5-20	11,5-22
: L U H 2 H [L E Φ H [mmO [mm]	1-2,5			2,5-6		
SW [mm]	42	42	42	50	50	50
Weight [g]	111	132	156	186	206	241

- screwless connection technology
- housing material: PA6
- contacts: brass
 - to order nickel-plated contacts please add a "v" e.g. 015-6TTv

IP44 splashproof

Plug IP67 SHARK

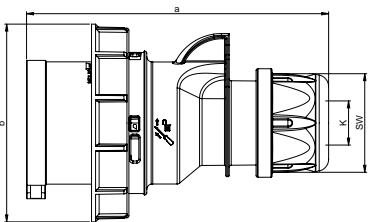


	16 Amp			32 Amp		
	3	4	5	3	4	5
a [mm]	122	128	134	150	150	155
b [mm]	71	79	87	93	93	100
K_cable Ø [mm]	6-15	6-15	8-16	11,5-20	11,5-20	11,5-22
: L U H 2 H [L E Φ H [mmO [mm]	1-2,5			2,5-6		
Contact screws [Ncm]	100			110		
SW [mm]	42	42	42	50	50	50
Weight [g]	130	154	183	223	242	276

- with screw terminals
- housing material: PA6
- contacts: brass
 - to order nickel-plated contacts please add a "v" e.g. 0152-6v

IP66/67 watertight

Plug IP67 SHARKTT

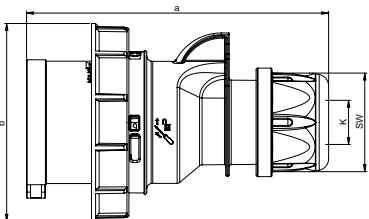

	16 Amp			32 Amp		
	3	4	5	3	4	5
a [mm]	122	128	134	150	150	155
b [mm]	71	79	87	93	93	100
K_cable Ø [mm]	6-15	6-15	8-16	11,5-20	11,5-20	11,5-22
: L U H 2 H [L E Φ H [mmO [mm]	1-2,5			2,5-6		
SW [mm]	42	42	42	50	50	50
Weight [g]	132	157	188	227	246	285

- screwless connection technology
- housing material: PA6
- contacts: brass
 - to order nickel-plated contacts please add a "v" e.g. 0152-6TTv

IP66/67 watertight

