

Accessories for circuit breakers

Auxiliary contact F/A




Technical specifications

Series	F/A
Standards	IEC/EN 60947-5-1
Use with a switch	FB2-63 (Standart) FB3-125 (EVO), FSD3
Nominal current (at a voltage of ~400V) In, A	3
Nominal current (at a voltage of ~230V) In, A	6
Rated frequency f, Hz	50/60
Rated voltage Un, V	~230/400
Number of contacts	1 C/O
Switching wear resistance (number of cycles on/off)	10 000/15 000 (electrical/mechanical)


Additional
devices

Schematic diagrams



Overall dimensions

RESET - testing the operation
of the synchronizer

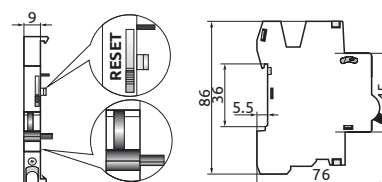

Order code	Full name of	Packaging, pcs		Unit	Gross weight, kg	
		Packaging	Box		Packaging	Box
F/A	Auxiliary contact F/A	1	240	0,030	0,030	7,200

Accessories for circuit breakers


Signal contact F/AL



Technical specifications


Series	F/AL
Standards	IEC/EN 60947-5-1, IEC/EN 60947-1
Use with a switch	FB2-63 (Standart), FB3-125 (EVO), FSD3
Nominal current (at a voltage of ~400V) In, A	3
Nominal current (at a voltage of ~230V) In, A	6
Rated voltage Un, V	~230/400
Rated frequency f, Hz	50/60
Number of contacts	1 C/O
Switching wear resistance (number of cycles on/off)	10 000/15 000 (electrical/mechanical)

Schematic diagrams



Overall dimensions

RESET - testing the operation
of the synchronizer
T - testing the operation
of contacts

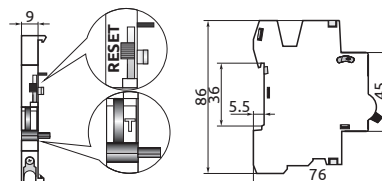

Order code	Full name of	Packaging, pcs		Unit	Gross weight, kg	
		Packaging	Box		Packaging	Box
F/AL	Signal contact F/AL	1	240	0,030	0,030	7,200