




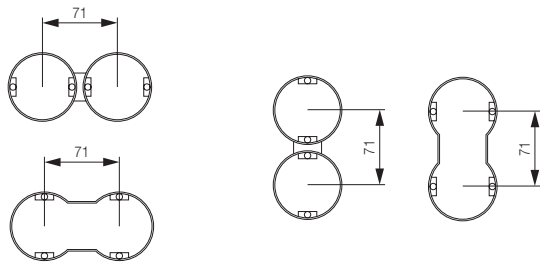
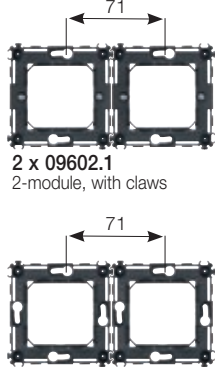
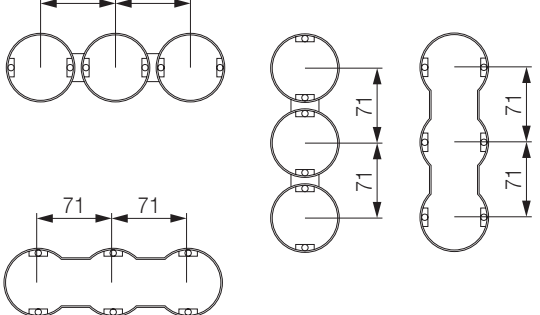
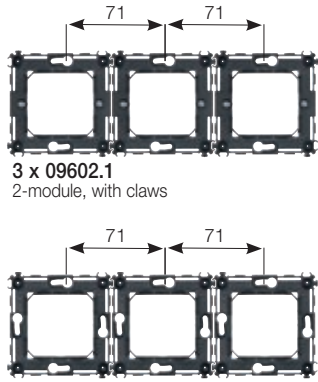
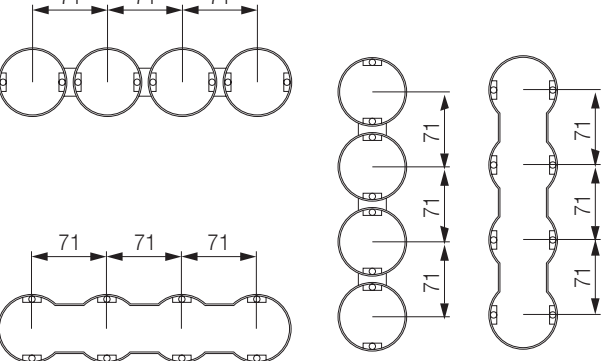
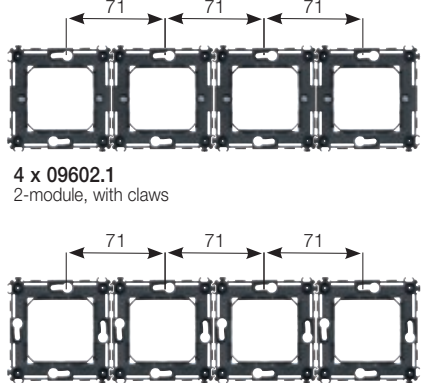


71 mm between centres installation

Module	Box	Frame
<p>1 for ø 60 mm mounting box</p>		 <p>09602.1 2-module, with claws</p>  <p>09603.1 2-module, without screws</p>
<p>2 for ø 60 mm mounting box</p>	<p>V71001 For masonry GW 650 °C, light blue V71001.AU GW 960 °C, black</p> <p>V71701 For hollow walls, for frame without claws, GW 850 °C, light blue</p>	 <p>09602.1 2-module, with claws</p>  <p>09603.1 2-module, without screws</p>
<p>2+2 71 mm between centres</p>		 <p>2 x 09602.1 2-module, with claws</p> <p>2 x 09603.1 2-module, without screws</p>
<p>2+2+2 71 mm between centres</p>		 <p>3 x 09602.1 2-module, with claws</p> <p>3 x 09603.1 2-module, without screws</p>
<p>2+2+2+2 71 mm between centres</p>		 <p>4 x 09602.1 2-module, with claws</p> <p>4 x 09603.1 2-module, without screws</p>