

TOUCH COMMANDS - TITANIUM VERSION

TOUCH COMMAND MODULES




GW 10 907

TOUCH ONE-WAY SWITCH MODULE

Code	Supply voltage	No. Chorus modules	Pack Carton
GW 10 907	230V ac - 50 Hz	1	1/12

CHARACTERISTICS: possibility of remote control with NO-type push-buttons and touch command duplicator modules GW10909. A simple programming allows you to configure the acoustic signals (buzzer), light intensity signals (blue LED with two intensity levels), and the output contact (bistable or monostable). NO relay output contact with 230V AC potential. Suitable for commanding halogen and incandescent lamps: 500W, energy saving lamps: 100W (max. 4 lamps), uncompensated fluorescent lamps: 100W. Use a supply relay for all loads that are not indicated.

NOTES: to be completed with ICE Touch glass plate (cod. GW16951CB, GW16952CB, GW16953CB, GW16951CN, GW16952CN, GW16953CN, GW16951CT, GW16952CT, GW16953CT).



GW 10 908


TOUCH DIMMER MODULE

Code	Supply voltage	Resistive load	Inductive load	No. Chorus modules	Pack Carton
GW 10 908	230V ac - 50 Hz	40 - 300 W	40 - 300 VA	1	1/12

CHARACTERISTICS: possibility of remote control with NO-type push-buttons and touch command duplicator modules GW10909. A simple programming allows you to configure the acoustic signals (buzzer) and light intensity signals (blue LED with two intensity levels).

NOTES: to avoid overheating, the side-by-side installation of several touch dimmer modules in a single container is not permitted; leave the space of a module between two dimmers. If installing two regulators in the same box, the maximum loads that can be commanded by each regulator must be reduced by 50%.

To be completed with ICE Touch glass plate (cod. GW16951CB, GW16952CB, GW16953CB, GW16951CN, GW16952CN, GW16953CN, GW16951CT, GW16952CT, GW16953CT).



GW 10 909

TOUCH COMMAND DUPLICATOR MODULE

Code	Supply voltage	No. Chorus modules	Pack Carton
GW 10 909	230V ac - 50 Hz	1	1/12

CHARACTERISTICS: the device must be combined with the touch one-way switch module GW10907 or the touch dimmer module GW10908, increasing the command points. A simple programming allows you to configure the acoustic signals (buzzer) and light intensity signals (blue LED with two intensity levels).

NOTES: to be completed with ICE Touch glass plate (cod. GW16951CB, GW16952CB, GW16953CB, GW16951CN, GW16952CN, GW16953CN, GW16951CT, GW16952CT, GW16953CT).

ICE TOUCH PLATES




GW 16 953 CB

ICE TOUCH - WHITE


Code	Description	For support codes	Pack Carton
GW 16 951 CB	1 symbol	GW16803	1
GW 16 952 CB	2 symbols	GW16803	1
GW 16 953 CB	3 symbols	GW16803	1

CHARACTERISTICS: plates in glass and with a glossy finish. Plates with 1, 2 or 3 symbols are used in combination with 1, 2 or 3 touch modules, respectively (switch module GW10907, dimmer module GW10908 or command duplicator module GW10909).


ONE PLATES

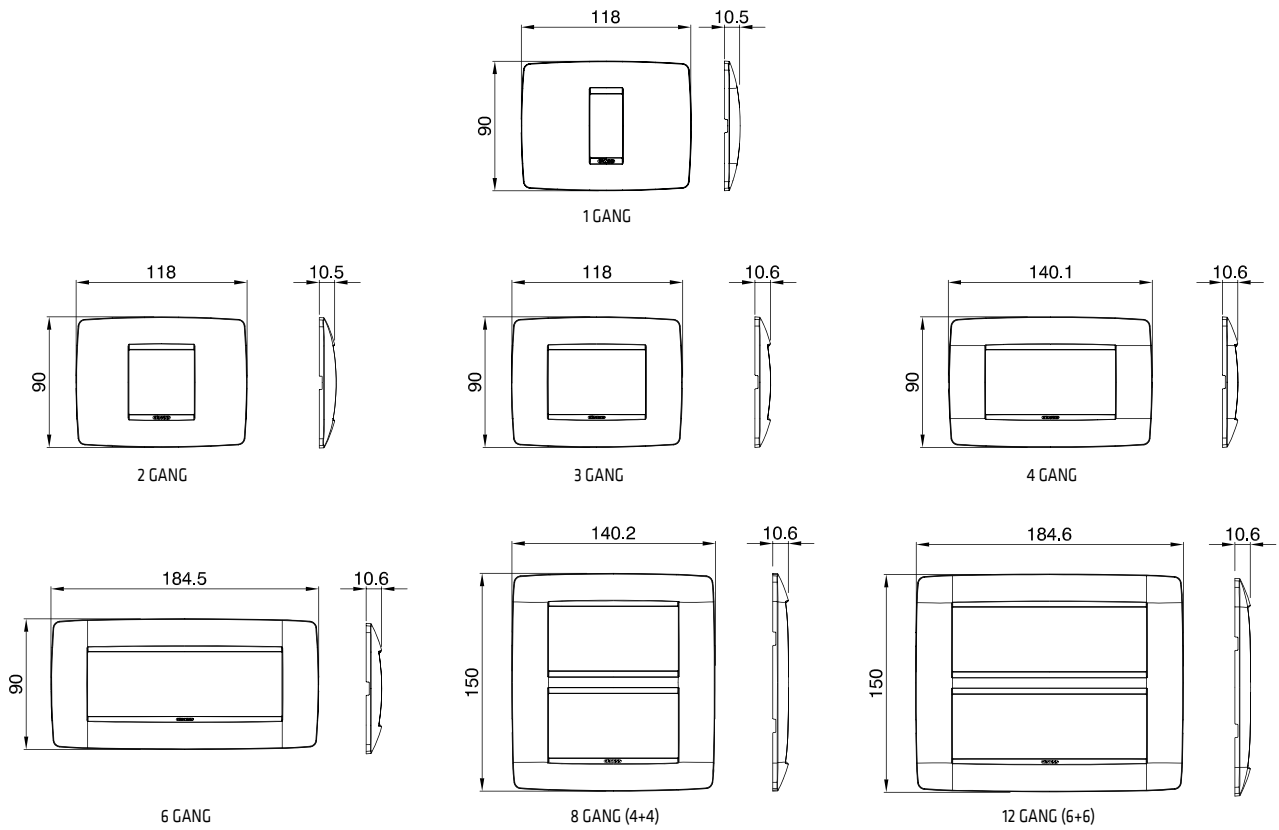


ONE INTERNATIONAL PLATES

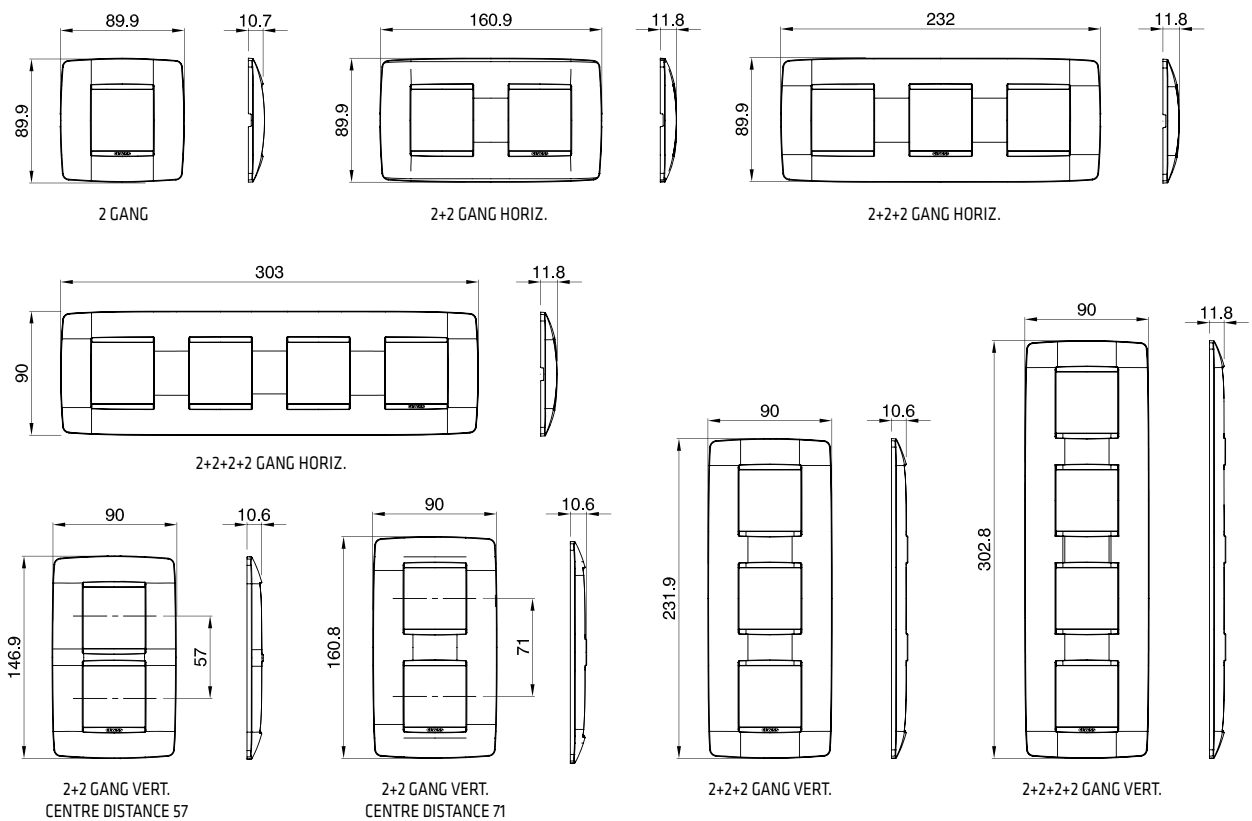





GEO PLATES

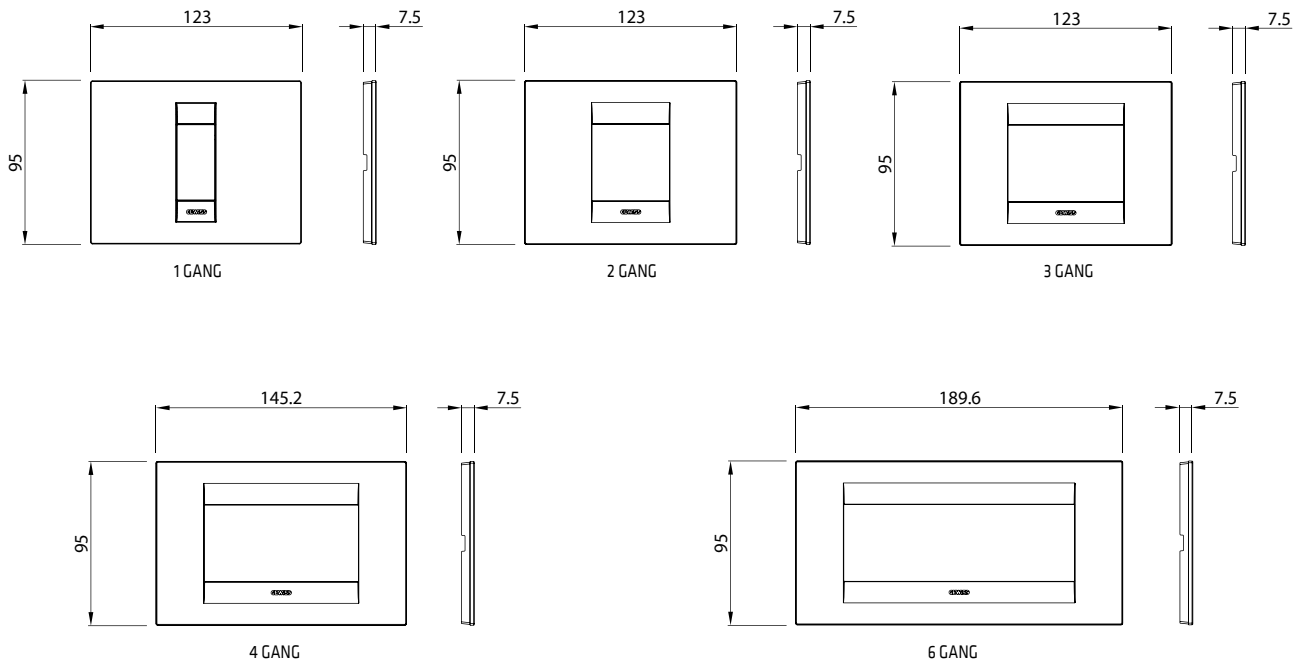

GEO INTERNATIONAL PLATES

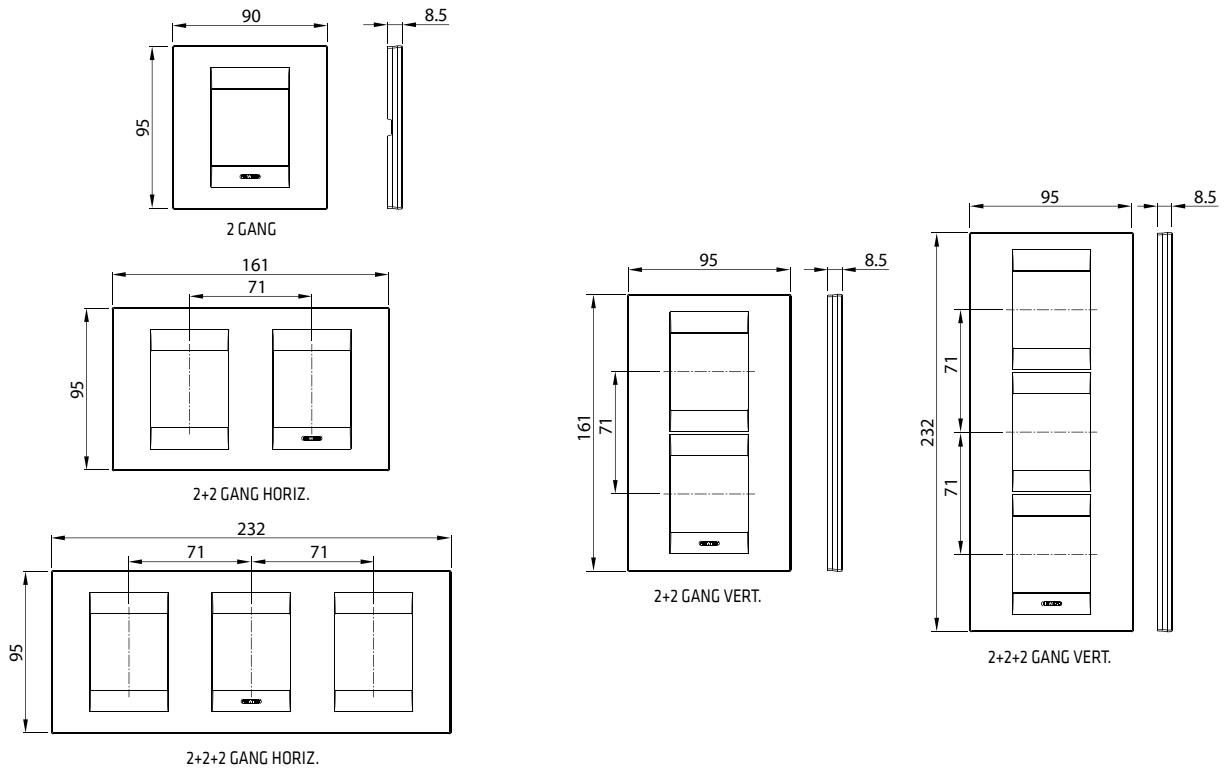

LUX PLATES

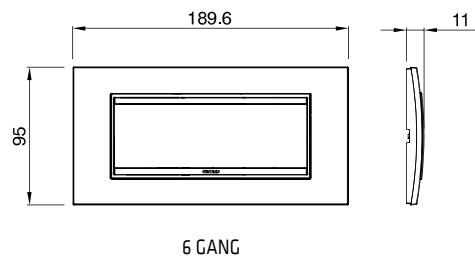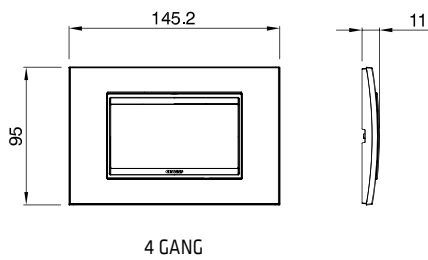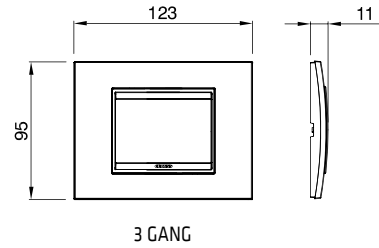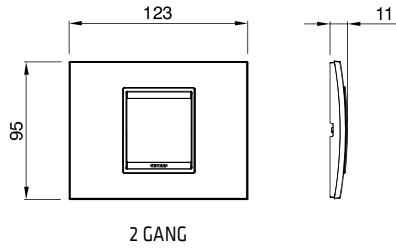

DOMESTIC RANGES

LUX INTERNATIONAL PLATES

