




Fașete tradiționale



TRACON					
80PR		81PR		75 × 2.2 mm	0.75-15 mm / 35 N
120PR		121PR		98 × 2.5 mm	1-21 mm / 45 N
130PR		131PR		135 × 2.6 mm	1-32 mm / 45 N
150PR		151PR		140 × 3.6 mm	2-36 mm / 80 N
160PR		161PR		160 × 2.6 mm	1-40 mm / 45 N
180PR		181PR		180 × 7.8 mm	3.5-45 mm / 250 N
200PR		201PR		200 × 2.6 mm	1-52 mm / 45 N
170PR		171PR		200 × 3.6 mm	2-50 mm / 80 N
190PR		191PR		200 × 4.8 mm	3-50 mm / 110 N
250PR		251PR		250 × 4.8 mm	3-68 mm / 110 N
280PR		281PR		280 × 8.0 mm	4-65 mm / 180 N
230PR		231PR		290 × 3.6 mm	2-80 mm / 80 N
210PR		211PR		290 × 4.8 mm	3.5-79 mm / 110 N
300PR		301PR		300 × 7.8 mm	5-80 mm / 250 N
220PR		221PR		360 × 4.8 mm	3.5-103 mm / 110 N
260PR		261PR		365 × 7.8 mm	8-100 mm / 250 N
370PR		371PR		370 × 3.6 mm	5-108 mm / 80 N
430PR		431PR		430 × 4.8 mm	3.5-115 mm / 110 N
450PR		451PR		450 × 7.8 mm	35-130 mm / 250 N
530PR		531PR		550 × 8 mm	10-160 mm / 250 N
760PR		761PR		780 × 9 mm	35-233 mm / 350 N
850PR		851PR		850 × 12.6 mm	40-255 mm / 450 N
1000PR		1001PR		1000 × 12.6 mm	40-302 mm / 450 N
270PR		271PR		260 × 2.5 mm	3-73 mm / 45 N
550PR		551PR		550 × 4.6 mm	4-160 mm / 110 N
610PR		611PR		610 × 8.8 mm	9-181 mm / 350 N
580PR		581PR		580 × 12.4 mm	9-168 mm / 450 N

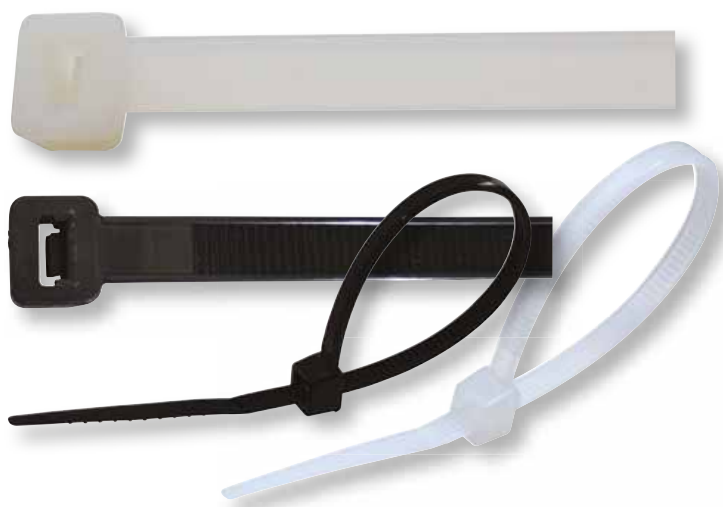

RELEVANT STANDARD  
EN 62275



B/18

TG008

TG007



Rezistă timp îndelungat la: hidrocarburi, diluanți organici și alcool  
 Pentru scurt timp rezistă la: acizi organici, săruri anorganice și alte combinații organice  
 Nu rezistă la: acizi anorganici, soluții oxidante