

PANEL MOUNTING SOCKET OUTLETS, straight

- With screwless Quick-Connect technology
- IEC 60309-1/2, EN 60309, VDE 0623
- Protection degree IP67


Panel Mounting Socket Outlet Quick-Connect

- Screwless terminals
- Kontex contact
- Flange 62 x 62 mm for 16A 3p, 72 x 65 mm for 16A 4p and 5p
- Protection degree IP67

Ampere	Poles	110V 50-60 Hz			230V 50-60 Hz			400V 50-60 Hz			500V 50-60 Hz			100-300Hz > 50V			301-500Hz > 50V			Qty	each
		3pol 4h	4pol 4h	5pol 4h	3pol 6h	4pol 9h	5pol 9h	3pol 9h	4pol 6h	5pol 6h	3pol 7h	4pol 7h	5pol 7h	3pol 10h	4pol 10h	5pol 10h	3pol 2h	4pol 2h	5pol 2h		
16	3			13719			13720			13721									10	120	
16	4			13724			13725			13726		13727							10	150	
16	5			13730			13731			13732									10	170	



Fig.: Type 13732

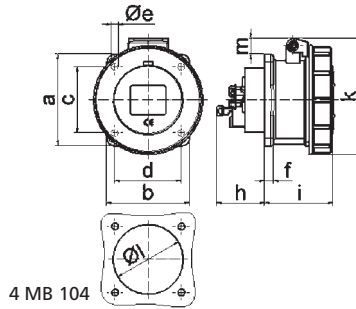

4 MB 104

Ampere Poles	16 3	16 4	16 5
a	62.0	72.0	72.0
b	62.0	65.0	65.0
c	47.0	52.0	52.0
d	47.0	52.0	52.0
e ø	5.5	5.5	5.5
f	7.0	7.0	7.0
h	35.5	35.5	35.5
i	57.0	58.0	57.0
k	76.0	83.0	93.0
l ø	45.0	45.0	55.0
m	10.0	9.0	13.0
Cond. mm² min	1.5	1.5	1.5
Cond. mm² max	4	4	4


Panel Mounting Socket Outlet Quick-Connect

- Screwless terminals
- Kontex contact
- Flange 75 x 75 mm
- Protection degree IP67

Ampere	Poles	110V 50-60 Hz			230V 50-60 Hz			400V 50-60 Hz			500V 50-60 Hz			100-300Hz > 50V			301-500Hz > 50V			Qty	each
		3pol 4h	4pol 4h	5pol 4h	3pol 6h	4pol 9h	5pol 9h	3pol 9h	4pol 6h	5pol 6h	3pol 7h	4pol 7h	5pol 7h	3pol 10h	4pol 10h	5pol 10h	3pol 2h	4pol 2h	5pol 2h		
16	3			13733			13734			13735					13736				10	130	
16	4			13737			13738			13739		13740			13741				10	145	
16	5			13743			13744			13745		13746			13747				10	160	
32	3			13749			13750			13751					13752				10	210	
32	4			13754			13755			13756		13757			13758				10	225	
32	5			13760			13761			13762		13763			13764				10	265	



Fig.: Type 13745

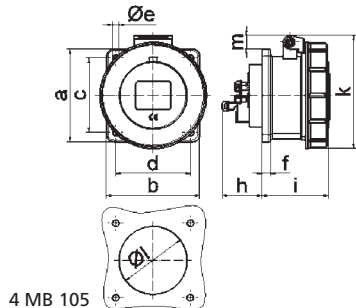

4 MB 105

Ampere Poles	16 3	16 4	16 5	32 3	32 4	32 5
a	75.0	75.0	75.0	75.0	75.0	75.0
b	75.0	75.0	75.0	75.0	75.0	75.0
c	60.0	60.0	60.0	60.0	60.0	60.0
d	60.0	60.0	60.0	60.0	60.0	60.0
e ø	5.5	5.5	5.5	5.5	5.5	5.5
f	7.0	7.0	7.0	8.0	8.0	8.0
h	35.5	35.5	35.5	50.0	50.0	50.0
i	57.0	58.0	57.0	65.0	65.0	65.0
k	76.0	83.0	93.0	100.0	100.0	106.0
l ø	45.0	45.0	55.0	60.0	60.0	60.0
m	3.5	7.0	11.5	12.0	12.0	17.0
Cond. mm² min	1.5	1.5	1.5	2.5	2.5	2.5
Cond. mm² max	4	4	4	10	10	10


Panel Mounting Socket Outlet Quick-Connect

- Screwless **double terminal**
- Kontex contact
- Flange 75 x 75 mm
- Protection degree IP67

Ampere	Poles	110V 50-60 Hz			230V 50-60 Hz			400V 50-60 Hz			500V 50-60 Hz			100-300Hz > 50V			301-500Hz > 50V			Qty	each
		3pol 4h	4pol 4h	5pol 4h	3pol 6h	4pol 9h	5pol 9h	3pol 9h	4pol 6h	5pol 6h	3pol 7h	4pol 7h	5pol 7h	3pol 10h	4pol 10h	5pol 10h	3pol 2h	4pol 2h	5pol 2h		
16	5									130158									10	205	



Fig.: Type 130158

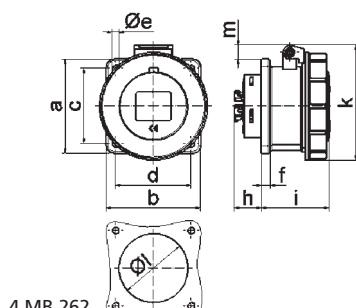

4 MB 262

Ampere Poles	16 5
a	75.0
b	75.0
c	60.0
d	60.0
e ø	5.5
f	7.0
h	23.0
i	57.0
k	93.0
l ø	55.0
m	11.5
Cond. mm² min	1.5
Cond. mm² max	4