

# Game <sup>new</sup>

Die-cast aluminum recessed spotlight with round or square seal, suitable for the installation on plasterboard ceilings. Matt chrome finish, matt white RAL 9001, matt black RAL 9011, matt gold RAL 1032. COB-Chip on Board technology for maximum efficiency; available with color temperatures 3000 K or 4000 K; CRI  $\geq$  85. Assembling and disassembling without utensils; protection IP20; insulation class II; LED useful life 30.000 h L70B50. It can be dimmed with 1-10V and DALI.




Product with UGR <19.

<b>Source</b>	LED COB
<b>Power</b>	11W
<b>Driver included</b>	On/Off
<b>Drivers available</b>	1-10V / DALI
<b>CCT</b>	3000 K / 4000 K
<b>CRI</b>	$\geq$ 85
<b>UGR</b>	<19
<b>LED life</b>	30.000 h
<b>Insulation class</b>	II
<b>IP</b>	20
<b>Material</b>	Aluminum
<b>Warranty</b>	5 years




# Game Round



⌀ 74 mm  
0,280 Kg/0,0011 m<sup>3</sup>

**LED COB CREE** Driver ON/OFF included

Power	Beam	Flux	CCT	Finish		Code	€
11W	36°	850 Lm	3000 K	Silver	+ [ ]	192284	39
				White	+ [ ]	192291	39
				Black	+ [ ]	192277	39
				Gold	+ [ ]	192307	39
				4000 K White	+ [ ]	267975	39 <small>new</small>




⌀ 74 mm  
0,280 Kg/0,0011 m<sup>3</sup>

**LED COB CREE** Driver ON/OFF included

Power	Beam	Flux	CCT	Finish		Code	€
11W	36°	850 Lm	3000 K	Silver	[ ] + [ ]	192321	39
				White	[ ] + [ ]	192338	39
				Black	[ ] + [ ]	192314	39
				Gold	[ ] + [ ]	192345	39
				4000 K Black	[ ] + [ ]	267968	39 <small>new</small>

**DIMMABLE DRIVER\*** Not included/Optional

	Power	Output	Measure	Code	€	
	1-10V	12W	250 mA	150 x 43 x 29 mm	217253	30
	DALI	11W	250 mA	135 x 20 x 30 mm	202396	39

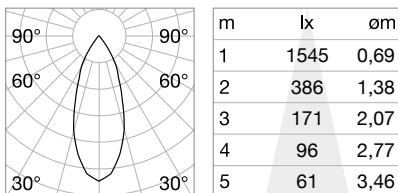

**CRI≥85 11W 36° 850Lm 3000K**

\* The dimmable power supplies must be ordered in concomitance with the product and will be included inside the fittings by replacing the on-off power supply.

