

205.W119-B

WALL BOX 1 SOCKET TYPE 2
Type 2 1P+N+E 32A 230V~ 7,4kW
32A 230V 1P+N+E IP55 IK10



* Product image may be indicative



IEC 61439-7 (2018)
EN IEC 61851-1 (2019)
Low voltage direct. 2014/35/EU
EMC directive 2014/30/EU

GENERAL CHARACTERISTICS

Commercial Series	BE-W[2.0] Series
Synthetical description	WALL BOX 1 SOCKET TYPE 2
Version	LITE
Mounting version	SURFACE MOUNTING
EV standard	Type 2 1P+N+E 32A 230V~ 7,4kW

TECHNICAL CHARACTERISTICS

Rated current	32A
Rated voltage	230V
Working frequency	50/60Hz
Poles	1P+N+E

PHYSICAL CHARACTERISTICS

Material	ENGINEERING PLASTIC
Protection degree IP	IP55
Working temperature	-30°C/+55°C with derating
GLOW WIRE	GW 650°C
Protection degree IK	IK10
Colour	ANTHRACITE
Saline solution	Resistant
UV protection	UV resistant
Mounting version	SURFACE MOUNTING

DIMENSIONAL CHARACTERISTICS


Dimensions	235x370x115mm
------------	---------------

INTERFACE, CONTROLS, FUNCTIONS AND EQUIPMENT

Version	LITE
EV standard	Type 2 1P+N+E 32A 230V~ 7,4kW
HMI (Human-Machine Interfaces)	APP
User authentication	APP authentication Free
Connectivity	WiFi
EV functions	charge in mode 3 with pwm circuit pilot predisposition for serial communication energy metering and current consumption working in mode stand-alone free or personal protection against direct contact Safety Child Shutters identification of connected cord-set size POWER MANAGEMENT function embedded managing of latching system remote control with smartphone APP wireless connection to Wi-Fi home
EV equipment	1 terminal strip 3x10mm ² 1 power supply 24Vdc 36W 1 fuse holder 1P+N gG 4A 1 DC Leakage detector

	1 RGB led stripes
	1 backup battery
	1 modular contactor 2P 40A 24Vdc
	1 control card with Wi-Fi connection 2,4GHz
	1 power meter 1P+N
EV excluded	upstream protections (by the installer):
	1 circuit breaker 1P+N \geq C32 / 30mA ist. A

■ DIMENSION

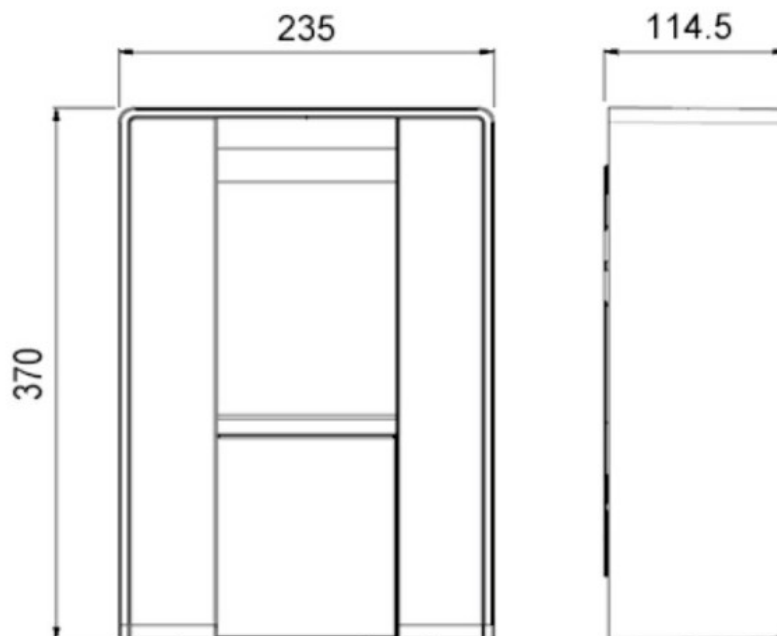

■ DOWNLOAD

[Technical drawing \[PDF\]](#)
[Technical drawing \[DWG\]](#)
[Technical drawing \[STP\]](#)
[Instruction manual](#)