

Lika ^{new}


Family of recessed rectangular LED modules in die-cast aluminum, painted black or white with shiny black polycarbonate reflector. Available in the TRIM version, with frame, or TRIMLESS, with totally vanishing recessed edge, for installation on plasterboard ceilings. Modules available with two, five or ten light sources. Specially designed to avoid glare (UGR <19), best for installation in OFFICES and SHOPS or in minimal residential environments. Light source with integrated LED; available with 3000 K and 4000 K color temperature; CRI ≥ 90, protection degree IP20, insulation class II; LED useful life 30.000 h L70B50.

UGR Product with UGR <16.

Source	LED COB
Power	6W / 12,5W / 20W
Driver included	On/Off
Drivers available	DALI / Push
CCT	3000 K / 4000 K
CRI	≥90
UGR	<16
LED life	30.000 h
Insulation class	II
IP	20
Material	Aluminum
Warranty	5 years




Lika Trimless



75 x 70 mm
0,220 Kg/0,0006 m³

LED COB OSRAM Driver ON/OFF included


Power	Beam	Flux	CCT	Finish	Code	€
6 W	29°	440 Lm	3000 K	Black	206202	46
		500 Lm	4000 K	Black	267890	46 <i>new</i>



145 x 70 mm
0,390 Kg/0,0013 m³

LED COB OSRAM Driver ON/OFF included

Power	Beam	Flux	CCT	Finish	Code	€
12,5 W	29°	1100 Lm	3000 K	Black	206226	77
		1250 Lm	4000 K	Black	267906	77 <i>new</i>




278 x 70 mm
0,720 Kg/0,0023 m³

LED COB OSRAM Driver ON/OFF included

Power	Beam	Flux	CCT	Finish	Code	€
20 W	29°	2200 Lm	3000 K	Black	206240	124
		2500 Lm	4000 K	Black	267913	124 <i>new</i>

DIMMABLE DRIVER* Not included/Optional

Model	Control	Power	Output	Measure	Code	€
Lika 6 W	DALI	10 W	700 mA	135 x 30 x 20 mm	267982	45 <i>new</i>
Lika 12,5 W	DALI	12 W	700 mA	135 x 30 x 20 mm	267999	45 <i>new</i>
Lika 20 W	DALI/Push	25 W	600 mA	167 x 41 x 32 mm	268002	85 <i>new</i>

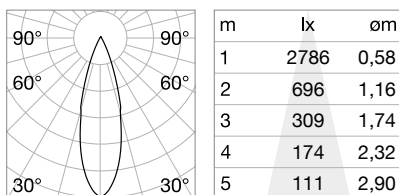

CRI≥90 12,5W 29° 1100Lm 3000K

* The dimmable power supplies must be ordered in concomitance with the product and will be included inside the fittings by replacing the on-off power supply.

