

# Dynamic

Modular system of aluminum recessed elements consisting of source, reflector and seal, with lenses and optional screens; white, chrome, black, gold finish; possible recess of round or square shape, symmetrical or asymmetrical reflector; three different emission angles options. Light source with integrated LED COB technology for maximum efficiency, available with a color temperature of 2700 K, 3000 K or 4000 K; Energy efficient LED with high color rendering; CRI  $\geq 90$ ; starting binning  $\leq 3$ -Step MacAdam; front protection IP54 (after installation of the product); insulation class II; LED useful life 50.000 h L70B50. Available in both DALI and 1-10V dimmable versions. Thanks to its compact size and great versatility, it is optimal for installation in DOMESTIC, MANAGERIAL and RETAIL indoor locations.

**PRO** High-tech product with high quality materials, intended for professional use.



**UGR** Product with UGR <19.

**IP54** Protection degree IP54.

Source	LED COB
Power	9W / 10W / 15W
Driver included	On/Off
Drivers available	1-10V / DALI / Push
MacAdam	SDCM 3
CCT	2700 K / 3000 K / 4000 K
CRI	$\geq 90$
UGR	<19
LED life	50.000 h
Insulation class	II
IP	54
Material	Aluminum
Warranty	5 years



# Dynamic Round

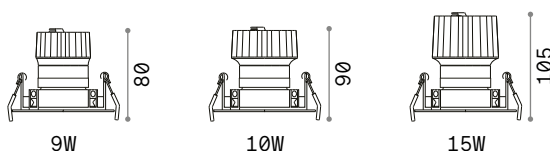


0,020 Kg/0,0002 m<sup>3</sup>

**REFLECTOR** Required

SYMMETRICAL


Finish		Code	€
White		211787	7
Chrome		221649	8
Black		211794	7
Gold		211800	7



0,020 Kg/0,0002 m<sup>3</sup>

ASYMMETRIC - 30°

Finish		Code	€
White		211848	7
Chrome		221663	9
Black		211855	7
Gold		211862	7



⌀ 80 mm  
0,060 Kg/0,0004 m<sup>3</sup>

**FRAME** Required

Finish		Code	€
White		208695	15
Chrome		221687	17
Black		208701	15
Gold		208718	15

