


plafoniera E27 cu senzor de prezenta - IP44



IP44

unghi detectie: 360°
distanța detectie max.: 8m
inaltime de montare: 2-4m
reglaj: lux (3-2000)
reglaj timp: (10sec. - 12min.)
putere max.: 4A(60W)

- Corp de iluminat cu montaj aparent
- Material : din PMMA
- Dulie: E27
- Putere maxima : 60W




COD	MODEL	CULOARE	DULIE	DENUMIRE	DIMENSIUNI			PACK. (buc)
					D (mm)	W (mm)	h (mm)	
00-5942	ROTUND	alb	E27	Plafoniera Ø30cm 1xE27	300	-	100	1/5

plafoniere LED cu senzor de prezenta - IP54




IP54

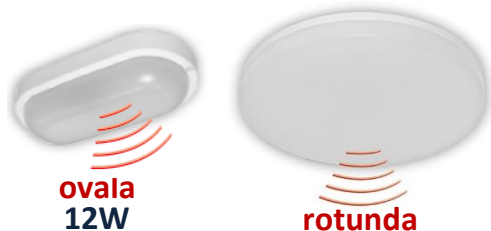

unghi detectie: 360°
distanța detectie max.: 5m
se activeaza la intuneric
si ramane aprinsa: 3min.

- Corp de iluminat cu montaj aparent
- Material : dispersor mat din P.C.
- Putere maxima : 12-18-24W




COD	MODEL	CULOARE	PUTERE (W)	LUMINA	LUMEN (lm)	DIMENSIUNI			PACK. (buc)	
						L (mm)	W (mm)	h (mm)		
21-20512710	OVAL	alb	12W	alba	4000k	960	205	105	54	1/24
21-28018710	ROTUND	alb	18W	alba	4000k	1800	280	-	54	1/12
21-33024710	ROTUND	alb	24W	alba	4000k	2400	330	-	54	1/12

aplice & plafoniere LED cu senzor de prezenta - IP64




IP64

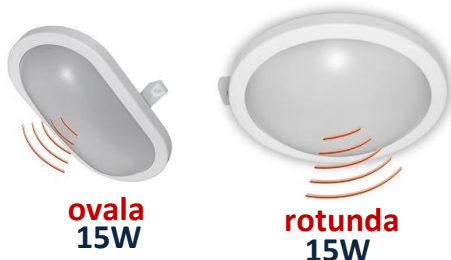

unghi detectie: 360°
distanța detectie max.: 5m
se activeaza la intuneric
si ramane aprinsa: 2min.

- Corp de iluminat cu montaj aparent
- Material : dispersor mat din P.C.
- Putere maxima : 15W



COD	MODEL	CULOARE	PUTERE (W)	LUMINA	LUMEN (lm)	DIMENSIUNI			PACK. (buc)	
						L (mm)	W (mm)	h (mm)		
21-21615710	OVAL	alb	15W	alba	4000k	1200	216	142	79	1/20
21-21315710	ROTUND	alb	15W	alba	4000k	1200	213	190	79	1/20