Quick new

Extruded aluminum cylindrical tracklight suitable for installation on three-phase track. White or black powder coating, 355° turning head and 90° adjustable, the power driver is included and located in the cylindrical body of the projector itself. Dimmable 1-10 or DALI version available. Light source with integrated COB LED technology for maximum efficiency, available with a color temperature of 3000K or 4000K; Energy efficient LED with high color rendering, up to CRI ≥ 90; starting binning ≤3-Step MacAdam; symmetrical beam optic with three different emission angles and glare control (UGR <19); assembly and disassembly without tools; IP20 protection; insulation class I: LED useful life 50.000 h L80B50. Ideal for installation in big rooms, where great flexibility and color rendering is required, such as MUSEUM, COMMERCIAL and RETAIL spaces.

PRO

High-tech product with high quality materials, intended for professional use.



Product with UGR <19.

Source LED COB

Power 15W/21W/28W

Driver included On/Off/1-10V/DALI

Drivers available No

Track Three-phase

(standard Eutrac)

MacAdam SDCM 3

CCT 3000 K / 4000 K

CRI ≥80/≥90

UGR <19

LED life 50.000 h

Insulation class I

IF 20

Material Aluminum
Warranty 5 years




Link - Page 620

Quick 15W



CRI≥80

	Power	Beam	Driver	Flux	ССТ	Finish	Code	€
	15 W	30°	On-Off	1900 Lm	3000 K	White	222509	115
						Black	222523	115
				2050 Lm	4000 K	White	222530	115
87						Black	222547	115
			1-10V	1900 Lm	3000 K	White	249643	160
221						Black	247861	160
7			DALI	1900 Lm	3000 K	White	249681	170




ᇄ	ויאמר
υn	ı ∠5\


Power	Beam	Driver	Flux	ССТ	Finish	Code	€
15 W	30°	On-Off	1650 Lm	3000 K	White	222554	115
					Black	222561	115
			1800 Lm	4000 K	White	222578	115
					Black	222585	115

Black

246437

170

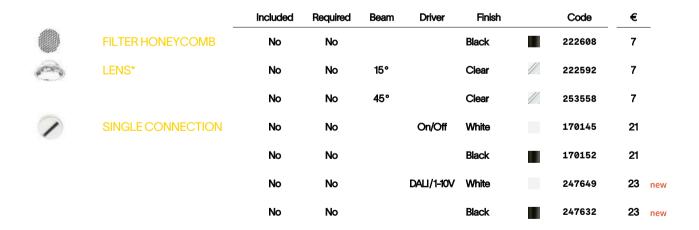



m	lx	øm		
1	3451	0,51		
2	862	1,02		
3	383	1,53		
4	215	2,04		
5	138	2,55		

CRI≥80 15W 30° 1900Lm 3000K

^{*} The optional lens will be mounted inside the product as replacement for the default