

# Quick **new**

Extruded aluminum cylindrical tracklight suitable for installation on three-phase track. White or black powder coating, 355° turning head and 90° adjustable, the power driver is included and located in the cylindrical body of the projector itself. Dimmable 1-10 or DALI version available. Light source with integrated COB LED technology for maximum efficiency, available with a color temperature of 3000K or 4000K; Energy efficient LED with high color rendering, up to CRI ≥ 90; starting binning ≤3-Step MacAdam; symmetrical beam optic with three different emission angles and glare control (UGR <19); assembly and disassembly without tools; IP20 protection; insulation class I; LED useful life 50.000 h L80B50. Ideal for installation in big rooms, where great flexibility and color rendering is required, such as MUSEUM, COMMERCIAL and RETAIL spaces.


**PRO** High-tech product with high quality materials, intended for professional use.

**UGR** Product with UGR <19.


Source	LED COB
Power	15W / 21W / 28W
Driver included	On/Off / 1-10V / DALI
Drivers available	No
Track	Three-phase (standard Eutrac)
MacAdam	SDCM 3
CCT	3000 K / 4000 K
CRI	≥80 / ≥90
UGR	<19
LED life	50.000 h
Insulation class	I
IP	20
Material	Aluminum
Warranty	5 years



[Link - Page 620](#)

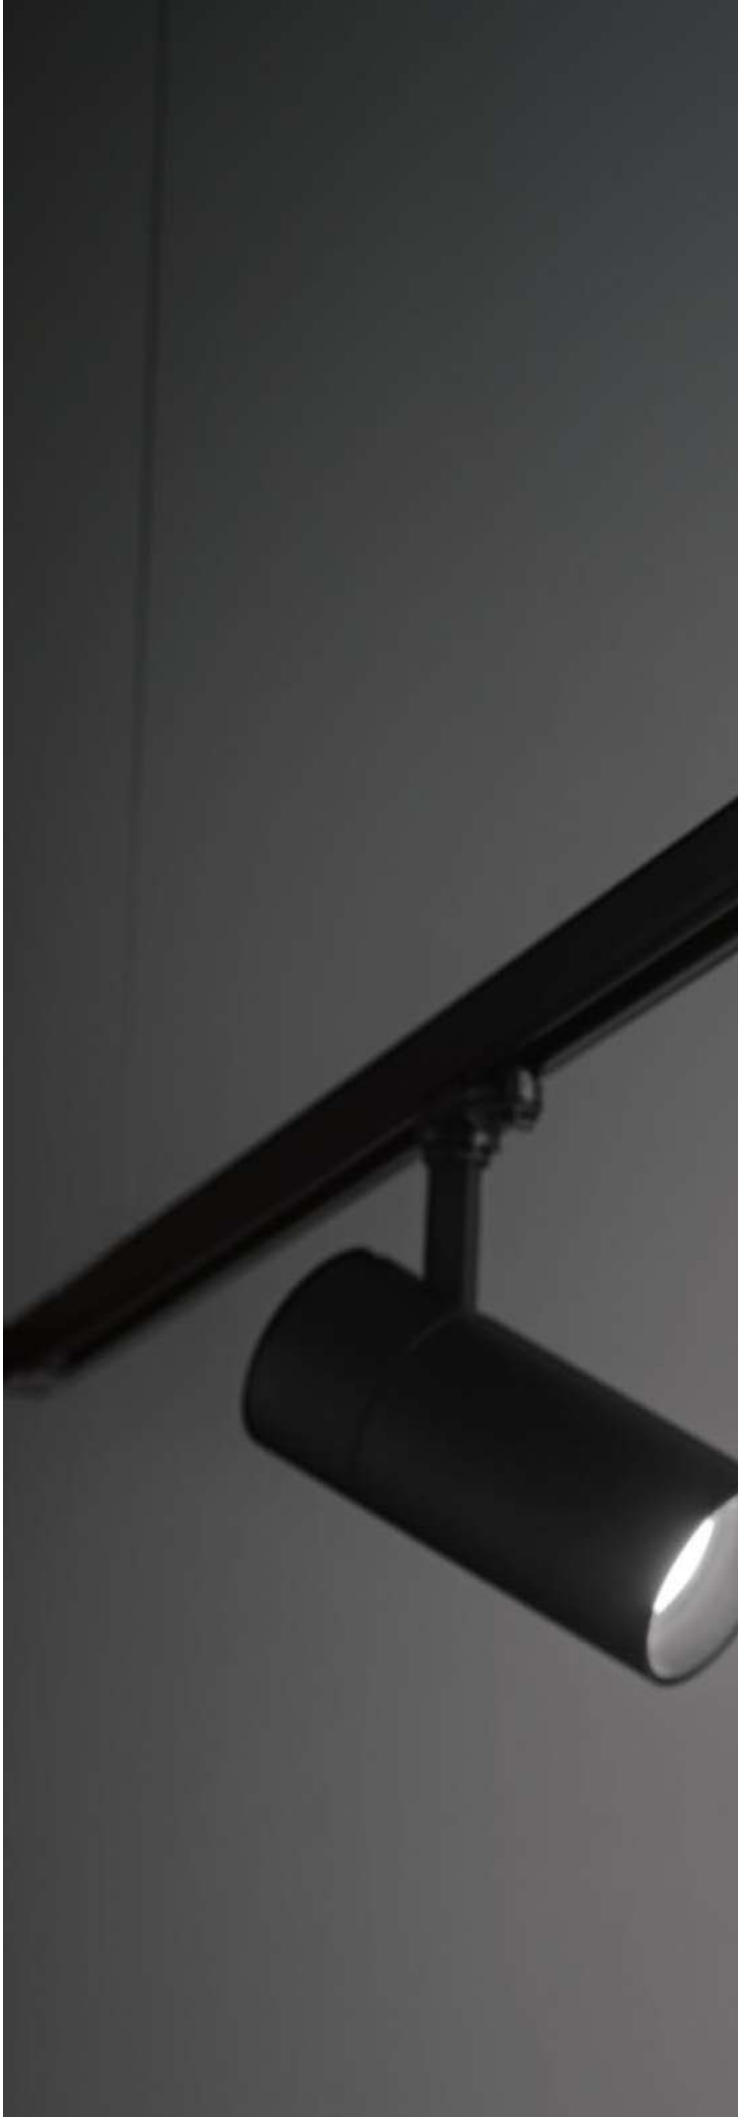

# Quick 28W



90° 355°  
1,200 Kg/0,0063 m<sup>3</sup>

## LED COB CITIZEN

### CRI ≥ 80

Power	Beam	Driver	Flux	CCT	Finish	Code	€	
28W	30°	On-Off	3850 Lm	3000 K	White	222615	140	
					Black	222622	140	
		1-10V	3850 Lm	3000 K	White	249674	190	
					Black	247885	190	
			DALI	3850 Lm	3000 K	White	249704	220
						Black	246413	220

### CRI ≥ 90

Power	Beam	Driver	Flux	CCT	Finish	Code	€
28W	30°	On-Off	3400 Lm	3000 K	White	222653	140
					Black	222660	140
			3600 Lm	4000 K	White	222677	140
					Black	222684	140



### FILTER HONEYCOMB




### LENS\*



### SINGLE CONNECTION

Included	Required	Beam	Driver	Finish	Code	€
No	No			Black	222714	8
No	No	18°		Clear	222691	8
No	No	45°		Clear	222707	8
No	No		On/Off	White	170145	21
No	No			Black	170152	21
No	No		DALI/1-10V	White	247649	23 <small>new</small>
No	No			Black	247632	23 <small>new</small>



m	lx	øm
1	8760	0,55
2	2190	1,11
3	973	1,67
4	547	2,22
5	350	2,78

CRI ≥ 80 28W 30° 3850Lm 3000K

\* The optional lens will be mounted inside the product as replacement for the default one.

