

# Led Panel new

Source	LED SMD	UGR	<19
Power	38,5W	LED life	25.000 h
Driver included	On/Off	Insulation class	II
Drivers available	1-10V / DALI / Push	IP	20
MacAdam	SDCM ≤4	Material	Aluminum
CCT	3000 K / 4000 K	Warranty	5 years
CRI	≥80 / ≥90		



2,200 Kg/0,0144 m<sup>3</sup>  
Purchase Qty. 2 pieces

## LED SMD Driver ON/OFF included

CRI ≥80

Power	Beam	Flux	CCT	Finish	Code	€
38,5 W	81°	3800 Lm	3000 K	White	249711	45
		3950 Lm	4000 K	White	249728	45

CRI ≥90

Power	Beam	Flux	CCT	Finish	Code	€
38,5 W	81°	3800 Lm	3000 K	White	246390	45
		3950 Lm	4000 K	White	244181	45

## DIMMABLE DRIVER\* Not included/Optional

	Power	Output	Measure	Code	€
1-10V	40 W	1000 mA	125 x 83 x 26 mm	247854	30
DALI/Push	40 W	1000 mA	106 x 69 x 28 mm	247847	55




**KIT PENDANT**

**KIT SURFACE**

**RECESSED FRAME\*\***

Included	Required	N° Cables	Cables Length	Code	€
No	No	4	1000 mm	244198	4
No	No			244204	3
No	No			267692	15 <span style="color: #e67e22;">new</span>

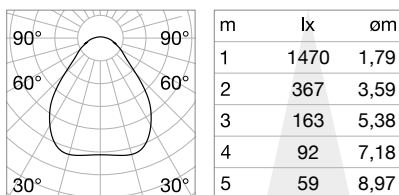

\* The dimmable power supplies must be ordered in concomitance with the product and will be included inside the fittings by replacing the on-off power supply.



CRI ≥80 38,5W 81° 3800Lm 3000K

\*\*RECESSED FRAME 607 x 607 mm

Kit Emergency - Page 818

