

Off new

Unmovable aluminum recessed fitting with round ring in three different dimensions, suitable for plasterboard ceilings installation. Matt black RAL 9005 and matt white ral 9016 finishes, Passively cooled integrated LED ; COB (Chip on Board) technology for maximum efficiency; UGR < 19; starting binning ≤ 3-Step MacAdam; available with 3000 K and 4000 K color temperature; CRI ≥ 90; protection IP54; insulation class II; dimmable options: 1-10V, DALI and Push; LED useful life 50.000 h L80B50. Suited for OFFICES and MANAGERIAL environments and in general where computers are present and there is the necessity to guarantee a great glare control. The high color rendering level makes it ideal even for exhibiting spaces and for the enhancement of the products in a showroom and sales area of the RETAIL sector.

PRO

High-tech product with high quality materials, intended for professional use.

UGR

Product with UGR < 19.

IP54

Protection degree IP54.

Source	LED COB
Power	15W / 28W / 42W
Driver included	On/Off
Drivers available	1-10V / DALI / Push
MacAdam	SDCM 3
CCT	3000 K / 4000 K
CRI	≥ 90
UGR	< 19
LED life	50.000 h
Insulation class	II
IP	54
Material	Aluminum
Warranty	5 years




Kit Emergency - Page 818



Deep

Source	LED SMD	LED life	30.000 h
Power	10W/20W/30W	Insulation class	II
Driver included	On/Off	IP	20
Drivers available	1-10V/DALI/ Push	Material	Aluminum
CCT	3000 K/4000 K	Warranty	5 years
CRI	≥80		




① 90 mm

0,160 Kg/0,0014 m³

LED SMD Driver ON/OFF included

Power	Beam	Flux	CCT	Finish	Code	€
10 W	70°	1200 Lm	3000 K	White	249018	23
			4000 K	White	249025	23




① 145 mm

0,360 Kg/0,0037 m³

LED SMD Driver ON/OFF included

Power	Beam	Flux	CCT	Finish	Code	€
20 W	77°	2100 Lm	3000 K	White	249032	49
			4000 K	White	249049	49



① 200 mm


0,650 Kg/0,0053 m³

LED SMD Driver ON/OFF included


Power	Beam	Flux	CCT	Finish	Code	€
30 W	77°	3200 Lm	3000 K	White	248783	69
			4000 K	White	248790	69

DIMMABLE DRIVER* Not included/Optional


Model	Control	Power	Output	Measure	Code	€
Deep 10 W	1-10V	10 W	300 mA	135 x 30 x 20 mm	248950	26
	DALI/Push	12 W	300 mA	135 x 30 x 20 mm	248967	34
Deep 20 W	1-10V/Push	25 W	500 mA	167 x 41 x 32 mm	248974	56
	DALI	25 W	500 mA	167 x 41 x 32 mm	248981	79
Deep 30 W	1-10V/Push	30 W	750 mA	167 x 41 x 32 mm	248998	63
	DALI	36 W	700 mA	167 x 39 x 30 mm	249001	85

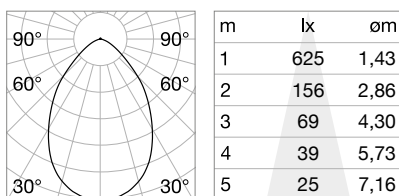

CRI≥80 10W 70° 1200Lm 3000K

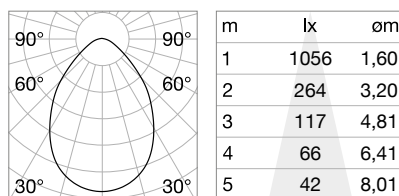

CRI≥80 20W 77° 2100Lm 3000K

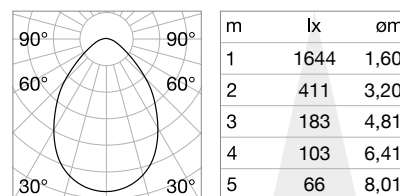

CRI≥80 30W 77° 3200Lm 3000K

* The dimmable power supplies must be ordered in concomitance with the product and will be included inside the fittings by replacing the on-off power supply.

