



ventilatoare axiale



- ventilatoare gama "EURO 1,2,3"
- Montare : **pe tubulatura**
- Material : ABS
- Culoare : alb
- Temperatura de lucru : max.+40°C
- Tensiune de lucru : 230V 50Hz
- Grad de protectie: IPx2




	A	B	C
EURO 1 Ø100	98	98	-
EURO 2 Ø120	118	83	102
EURO 3 Ø150	148	92,5	111

COD dablerom	TIP	FLUX DE AER (m³/h)	SUNET dB(A)1m	ROTATIE (rot./min)	PUTERE (W)	PACK. (buc)
20-007-0051	standard - Ø100	100	40	2650	15	1/20
20-007-0052	standard - Ø120	150	46	2650	17	1/20
20-007-0053	standard - Ø150	280	47	2650	20	1/20



- ventilatoare gama "ARIL ECO"
- Montare : **pe tubulatura**
- Material : ABS
- Culoare : alb
- Temperatura de lucru : max.+40°C
- Grad de protectie: IPx2

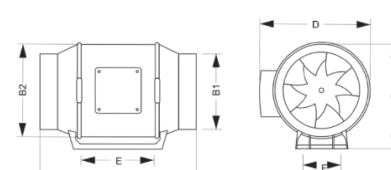


(mm)	75	100	125	150	160	200	250	310
A	226	225	258	310	310	297	377	448
B1	72	95	122	145	155	198	245	295
B2	135	135	135	190	190	210	265	310
C	155	155	155	210	210	230	280	330
D	170	170	170	220	220	245	280	345
E	49	49	58	60	60	80	135	195
F	57	57	58	83	83	90	100	100

COD dablerom	TIP	FLUX DE AER (m³/h)	SUNET dB(A)1m	ROTATIE (rot./min)	PUTERE (W)	PACK. (buc)
25-01-311	standard - Ø100	210	54	2770	30	1
25-01-312	standard - Ø125	360	56	2615	43	1
25-01-313	standard - Ø150	560	60	2530	70	1
25-01-314	standard - Ø160	560	60	2530	70	1
25-01-315	standard - Ø200	1400	64	2485	165	1
25-01-316	standard - Ø250	1800	72	2650	180	1
25-01-317	standard - Ø310	2550	75	2510	275	1



- ventilatoare gama "WB"
- Montare : **pe tubulatura**
- Material : otel
- Culoare : crom
- Temperatura de lucru : max.+42°C
- Tensiune de lucru : 230V 50Hz
- Grad de protectie: IPx2



	Ø150	Ø160	Ø200	Ø250	Ø315	Ø350
A	149	159	199	249	314	349
B	155	165	205	255	320	355
C	177	177	187	208	218	219

COD dablerom	TIP	FLUX DE AER (m³/h)	SUNET dB(A)1m	ROTATIE (rot./min)	PUTERE (W)	PACK. (buc)
20-007-0118	standard - Ø200	400	54	1400	40	1
20-007-0119	standard - Ø250	1000	56	1400	86	1
20-007-0120	standard - Ø315	1350	60	1400	110	1