


ventilatoare axiale



- ventilatoare gama "RICO"
- Montare : **pe perete**
- Material : ABS
- Culoare : alb
- Temperatura de lucru : max.+40°C
- Tensiune de lucru : 230V 50Hz
- Grad de protectie: IPx4

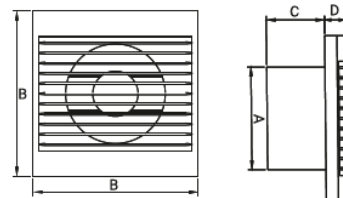


WYMIARY / DIMENSIONS / РАЗМЕРЫ				
	A	B	C	D
RICO Ø100	99	158	56	20
RICO Ø120	118	158	56	20

COD dablerom	TIP	FLUX DE AER (m³/h)	SUNET dB(A)1m	ROTATIE (rot./min)	PUTERE (W)	PACK. (buc)
20-007-4200	standard - Ø100	100	40	2650	15	1/20
20-007-4203	cu timer (2-23min.) - Ø100	100	40	2650	15	1/20
20-007-4201	standard - Ø125	150	46	2650	17	1/20
20-007-4206	cu timer (2-23min.) - Ø125	150	46	2650	17	1/20



- ventilatoare gama "ENERGY"
- Montare : **pe perete**
- Material : ABS
- Culoare : alb
- Temperatura de lucru : max.+40°C
- Tensiune de lucru : 230V 50Hz
- Grad de protectie: IPx4

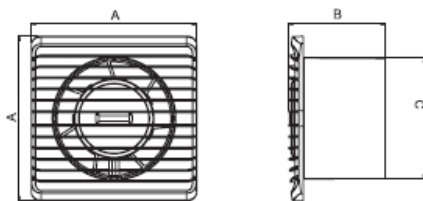

[mm]	Planet Energy 100	Planet Energy 125
A	135	160
B	79	79
C	99.4	124.4

COD dablerom	TIP	FLUX DE AER (m³/h)	SUNET dB(A)1m	ROTATIE (rot./min)	PUTERE (W)	PACK. (buc)
25-01-090	standard - Ø100	93	26	2400	8	1/20
25-01-092	cu timer (3-23min.) - Ø100	93	26	2400	8	1/20
25-01-095	standard - Ø125	140	28	2400	10	1/20
25-01-097	cu timer (3-23min.) - Ø125	140	28	2400	10	1/20

VALVE ANTIRETUR PENTRU VENTILATOARE "ENERGY"

COD dablerom	DENUMIRE	PACK. (buc)
25-07-200	valva antiretur pentru ventilator "ENERGY" Ø100	1
25-07-215	valva antiretur pentru ventilator "ENERGY" Ø120	1

