

Off new

Unmovable aluminum recessed fitting with round ring in three different dimensions, suitable for plasterboard ceilings installation. Matt black RAL 9005 and matt white ral 9016 finishes, Passively cooled integrated LED ; COB (Chip on Board) technology for maximum efficiency; UGR < 19; starting binning ≤ 3-Step MacAdam; available with 3000 K and 4000 K color temperature; CRI ≥ 90; protection IP54; insulation class II; dimmable options: 1-10V, DALI and Push; LED useful life 50.000 h L80B50. Suited for OFFICES and MANAGERIAL environments and in general where computers are present and there is the necessity to guarantee a great glare control. The high color rendering level makes it ideal even for exhibiting spaces and for the enhancement of the products in a showroom and sales area of the RETAIL sector.

PRO

High-tech product with high quality materials, intended for professional use.

UGR

Product with UGR < 19.

IP54

Protection degree IP54.


Source	LED COB
Power	15W / 28W / 42W
Driver included	On/Off
Drivers available	1-10V / DALI / Push
MacAdam	SDCM 3
CCT	3000 K / 4000 K
CRI	≥ 90
UGR	< 19
LED life	50.000 h
Insulation class	II
IP	54
Material	Aluminum
Warranty	5 years



Kit Emergency - Page 818




Off new



⌀ 100 mm
0,460 Kg/0,0021 m³

LED COB CITIZEN Driver TRIDONIC ON/OFF included


Power	Beam	Flux	CCT	Finish	Code	€
15 W	50°	1500 Lm	3000 K	White	266497	70 <small>new</small>
				Black	266558	70 <small>new</small>
	1600 Lm	4000 K	White	266503	70 <small>new</small>	
			Black	266565	70 <small>new</small>	



⌀ 150 mm
0,990 Kg/0,0045 m³

LED COB CITIZEN Driver TRIDONIC ON/OFF included

Power	Beam	Flux	CCT	Finish	Code	€
28 W	60°	3200 Lm	3000 K	White	266510	100 <small>new</small>
				Black	266572	100 <small>new</small>
	3400 Lm	4000 K	White	266527	100 <small>new</small>	
			Black	266589	100 <small>new</small>	



⌀ 200 mm
1,850 Kg/0,0094 m³

LED COB CITIZEN Driver TRIDONIC ON/OFF included

Power	Beam	Flux	CCT	Finish	Code	€
42 W	60°	4600 Lm	3000 K	White	266534	145 <small>new</small>
				Black	266596	145 <small>new</small>
	4800 Lm	4000 K	White	266541	145 <small>new</small>	
			Black	266602	145 <small>new</small>	




REFLECTOR


Model	Included	Required	Code	€
Off 15W	No	No	266619	10 <small>new</small>
Off 28 W	No	No	266626	15 <small>new</small>
Off 42 W	No	No	266633	20 <small>new</small>

DIMMABLE DRIVER* Not included/Optional


Model	Control	Power	Output	Measure	Code	€
Off 15 W	1-10V/Push	20 W	350 mA	105 x 20 x 50 mm	266657	50 <small>new</small>
	DALI	20 W	350 mA	105 x 20 x 50 mm	266701	50 <small>new</small>
Off 28 W	1-10V/Push	33 W	700 mA	100 x 20 x 65 mm	266671	70 <small>new</small>
	DALI	32 W	700 mA	100 x 20 x 65 mm	266725	70 <small>new</small>
Off 42 W	1-10V	42 W	1050 mA	120 x 20 x 75 mm	266688	90 <small>new</small>
	DALI/Push	45 W	1050 mA	150 x 43 x 30 mm	266732	90 <small>new</small>

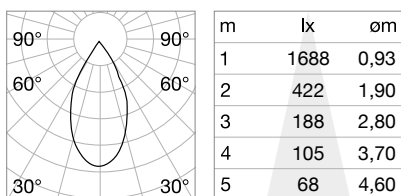

CRI≥90 15W 50° 1100Lm 3000K

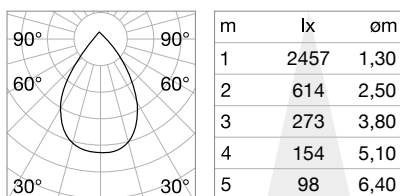

CRI≥90 28W 60° 2300Lm 3000K

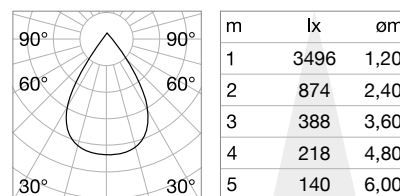

CRI≥90 42W 60° 4600Lm 3000K

* The dimmable power supplies must be ordered in concomitance with the product and will be included inside the fittings by replacing the on-off power supply.

