

Lika **new**


Family of recessed rectangular LED modules in die-cast aluminum, painted black or white with shiny black polycarbonate reflector. Available in the TRIM version, with frame, or TRIMLESS, with totally vanishing recessed edge, for installation on plasterboard ceilings. Modules available with two, five or ten light sources. Specially designed to avoid glare (UGR <19), best for installation in OFFICES and SHOPS or in minimal residential environments. Light source with integrated LED; available with 3000 K and 4000 K color temperature; CRI ≥ 90, protection degree IP20, insulation class II; LED useful life 30.000 h L70B50.

UGR Product with UGR <16.

Source	LED COB
Power	6W / 12,5W / 20W
Driver included	On/Off
Drivers available	DALI / Push
CCT	3000 K / 4000 K
CRI	≥90
UGR	<16
LED life	30.000 h
Insulation class	II
IP	20
Material	Aluminum
Warranty	5 years




Lika Trim



68 x 37 mm
0,130 Kg/0,0005 m³

LED COB OSRAM Driver ON/OFF included


Power	Beam	Flux	CCT	Finish		Code	€
6 W	29°	440 Lm	3000 K	Black	+ ■	206196	34
		500 Lm	4000 K	Black	+ ■	267869	34 <i>new</i>



140 x 37 mm
0,240 Kg/0,0008 m³

LED COB OSRAM Driver ON/OFF included

Power	Beam	Flux	CCT	Finish		Code	€
12,5 W	29°	1100 Lm	3000 K	Black	+ ■	206219	50
		1250 Lm	4000 K	Black	+ ■	267876	50 <i>new</i>




273 x 37 mm
0,480 Kg/0,0016 m³

LED COB OSRAM Driver ON/OFF included

Power	Beam	Flux	CCT	Finish		Code	€
20 W	29°	2200 Lm	3000 K	Black	+ ■	206233	96
		2500 Lm	4000 K	Black	+ ■	267883	96 <i>new</i>

DIMMABLE DRIVER* Not included/Optional

Model	Control	Power	Output	Measure	Code	€
Lika 6 W	DALI	10 W	700 mA	135 x 30 x 20 mm	267982	45 <i>new</i>
Lika 12,5 W	DALI	12 W	700 mA	135 x 30 x 20 mm	267999	45 <i>new</i>
Lika 20 W	DALI/Push	25 W	600 mA	167 x 41 x 32 mm	268002	85 <i>new</i>

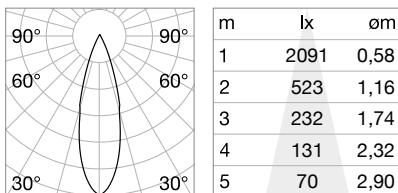

CRI≥90 12,5W 29° 1100Lm 3000K

* The dimmable power supplies must be ordered in concomitance with the product and will be included inside the fittings by replacing the on-off power supply.

