


Office

Aluminum linear lamp with direct light for suspended installation. White or black finish available with black reflectors. Integrated LED sources with glare control (UGR < 16); available with 3000 K and 4000 K color temperature; CRI ≥ 80; 30.000 h of life L70B50; protection IP20, insulation class I.

Source	LED SMD	LED life	30.000 h
Power	30W	Insulation class	I
Driver included	On/Off	IP	20
Drivers available	No	Material	Aluminum
CCT	3000 K / 4000 K		
CRI	≥80		
UGR	<16		

UGR Product with UGR <16.

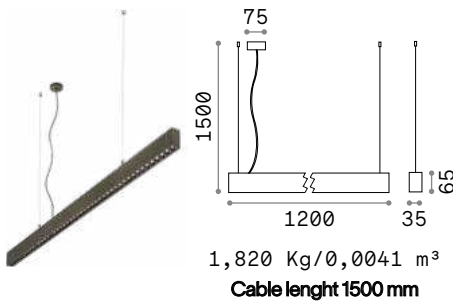


LED SMD Driver ON/OFF included

Power	Beam	Lumen	CCT	Finish	Code	€
30 W	37°	2800 lm	3000 K	White	271194	165
				Black	271187	165
30 W	37°	3100 lm	4000 K	White	271217	165
				Black	271200	165



Light beam: ACCENT



m	lx	øm
1	6008	0,72
2	1502	1,40
3	668	2,20
4	376	2,90
5	240	3,60



CRI≥80 30W 37° 3100lm 4000K



271194

271187