

Display ^{new}

Aluminum linear projector suitable for installation on three-phase track (Eutrac standard), available in three different lengths and with powder coating with white or black finish. The integrated power driver is located inside the track to minimize the volume of the visible product. Available models: WIDE with satin PMMA flat and diffusing optics; UGR with microprismatic PMMA diffuser for glare control and ACCENT with black reflectors (UGR <16). Integrated LED sources; available in CCT 3000 K and 4000 K; CRI ≥ 80; LED useful life 50,000 h L70B50; tool-free assembly and disassembly. Suitable for lighting OFFICES, COMMERCIAL spaces and EXHIBITION areas, it is ideal combined with other track spotlights with focused light.

PRO High-tech product with high quality materials, intended for professional use.

UGR Product with UGR <16 (Accent), <22 (UGR).


Source	LED SMD
Power	14W / 40W
Driver included	On/Off
Drivers available	No
Track	Three-phase (standard Eutrac)
MacAdam	SDCM 3
CCT	3000 K / 4000 K
CRI	≥80
UGR	<16 (Accent) / <22 (UGR)
LED life	50.000 h
Insulation class	II
IP	20
Material	Aluminum
Warranty	5 years



[Link - Page 612](#)




Display Accent



0,400 Kg/0,0064 m³

LED SMD SAMSUNG Driver ON/OFF included - UGR <16


Power	Beam	Lumen	CCT	Finish	Code	€
14 W	60°	1800 lm	3000 K	White	283593	185 <i>new</i>
				Black	283609	185 <i>new</i>
		1900 lm	4000 K	White	283616	185 <i>new</i>
				Black	283623	185 <i>new</i>



1,120 Kg/0,0112 m³

LED SMD SAMSUNG Driver ON/OFF included - UGR <16

Power	Beam	Lumen	CCT	Finish	Code	€
28 W	60°	3500 lm	3000 K	White	283524	290 <i>new</i>
				Black	276267	290 <i>new</i>
		3700 lm	4000 K	White	283531	290 <i>new</i>
				Black	283548	290 <i>new</i>





1,570 Kg/0,0173 m³

LED SMD SAMSUNG Driver ON/OFF included - UGR <16



Power	Beam	Lumen	CCT	Finish	Code	€
40 W	60°	5100 lm	3000 K	White	283555	400 <i>new</i>
				Black	283562	400 <i>new</i>
		5400 lm	4000 K	White	283579	400 <i>new</i>
				Black	283586	400 <i>new</i>





Light beam: ACCENT




CRI≥80 14W 60° 1800lm 3000K



CRI≥80 28W 60° 3500lm 3000K



CRI≥80 40W 60° 5100lm 3000K

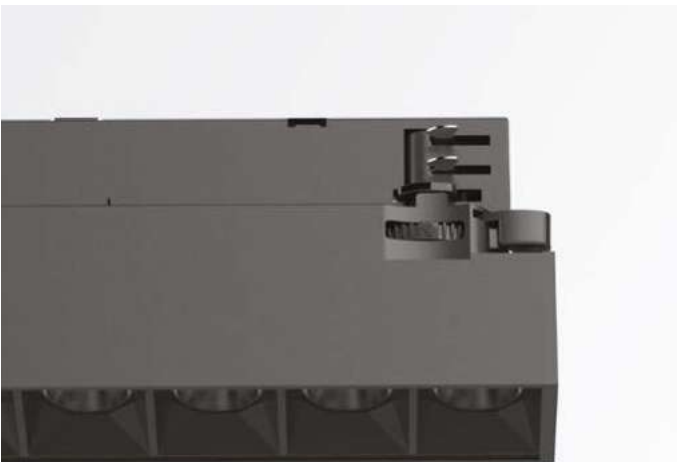

Display Accent 535 mm



Display Accent 1065 mm



Display Accent 1595 mm

