



corpuri de iluminat pentru tuburi cu LED cu oglinda - IP65

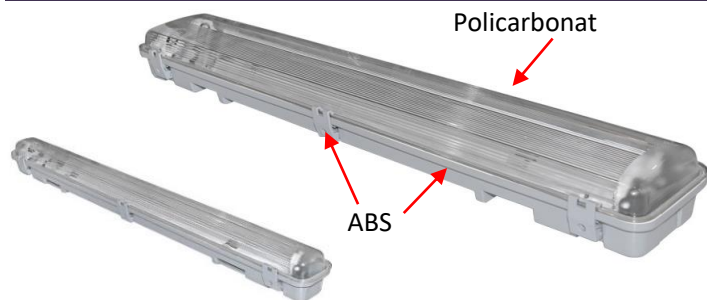

- Corp "IP65" cu montaj aparent fara balast
- Material :
 - baza ABS
 - dispersor policarbonat
 - Clipsuri ABS



gri



IP65



Alimentare tuburi la ambele capete

COD dablerom	CULOARE	DENUMIRE	DIMENSIUNI			Pack.
			L (mm)	W (mm)	h (mm)	(buc)
3-81060	gri	corp. pt. tub. 1x60cm	665	63	63	1/10
3-82060	gri	corp. pt. tub. 2x60cm	665	110	63	1/10
3-81120	gri	corp. pt. tub. 1x120cm	1258	63	63	1/10
3-82120	gri	corp. pt. tub. 2x120cm	1258	110	63	1/10
3-82150	gri	corp. pt. tub. 2x150cm	1565	110	63	1/10

corpuri de iluminat cu LED - IP65




48W

**cu sistem de emergenta
6W / 3ore autonomie**



**cu senzor
de miscare
36W**

- Corp "LED" cu montaj aparent
- Material: Policarbonat (PC)
- Include clips de fixare pe perete



IP65



18W - 24W - 36W - 45W - 60W

COD	PUTERE (W)	BUC. max. interconect.	LUMINA	LUMEN (lm)	DIMENSIUNI			PACK.	
					L (mm)	W (mm)	h (mm)	(buc)	
NON - INTERCONECTABILE									
3-1150361	36W	-	alba	4000k	3600	1500	44	33	1/6
3-1150360	36W	-	rece	6400k	3600	1500	44	33	1/6
INTERCONECTABILE									
3-10601181	18W	50	alba	4000k	1980	680	51	31	1/25
3-10601180	18W	50	rece	6000k	1980	680	51	31	1/25
3-11201361	36W	25	alba	4000k	3960	1280	51	31	1/25
3-11201360	36W	25	rece	6000k	3960	1280	51	31	1/25
3-11501451	45W	20	alba	4000k	4950	1580	51	31	1/25
3-11501450	45W	20	rece	6000k	4950	1580	51	31	1/25
3-11501601	60W	6	alba	4000k	7000	1540	53	41	1/16
3-11501600	60W	6	rece	6000k	7000	1540	53	41	1/16
INTERCONECTABIL - CU SENZOR DE MISCARE (distanța detectie:6m / se activează la 20lux / rămâne aprins:5min.)									
3-11202230	36W	25	rece	5000k	3960	1280	51	31	1/25
INCLUDE SISTEM DE EMERGENȚA - 3ore AUTONOMIE cu 6W									
3-1204861	48W	-	alba	4000k	4800/600	1200	87	74	1/9