




cu Protectia Motor cu Releu Termic




cu Valva antiretur



cu Carlic Sustinere



- ventilatoare gama "DAB"
- Montare : **pe perete / pe tavan**
- Material : ABS
- Culoare : alb
- Temperatura de lucru : max.+40°C
- Tensiune de lucru : 230V 50Hz
- Grad de protectie: IPx4

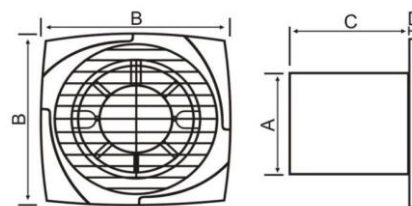

	A	B	C	D
DAB A100	98	140	100	13
DAB A120	118	170	100	18
DAB A150	150	170	100	18



COD dablerom	TIP	FLUX DE AER (m³/h)	SUNET dB(A)1m	ROTATIE (rot./min)	PUTERE (W)	PACK. (buc)
39-401006	standard - Ø100	98	40	2500	15	1/12
39-401011	cu cordon de tragere - Ø100	98	40	2500	15	1/12
39-402003	cu timer (3-15min.) - Ø100	98	40	2500	15	1/12
39-401216	cu senzor de miscare - Ø100	98	40	2500	15	1/12
39-401068	standard - Ø120	190	43	2450	20	1/12
39-401086	cu cordon de tragere - Ø120	190	43	2450	20	1/12
39-402024	cu timer (3-15min.) - Ø120	190	43	2450	20	1/12
39-401218	cu senzor de miscare - Ø120	190	43	2450	20	1/12
39-401070	standard - Ø150	320	45	2600	25	1/12
39-401223	cu cordon de tragere - Ø150	320	45	2600	25	1/12
39-402026	cu timer (3-15min.) - Ø150	320	45	2600	25	1/12
39-401221	cu senzor de miscare - Ø150	320	45	2600	25	1/12

FLANSA PENTRU MONTARE VENTILATOARE "DAB" LA GEAM

COD dablerom	DENUMIRE	PACK. (buc)
39-429023	FLANSA pt. GEAM pentru ventilator "DAB" Ø100	1/100
39-429024	FLANSA pt. GEAM pentru ventilator "DAB" Ø120	1/100

