


Square illumination:  
XLED PRO Square

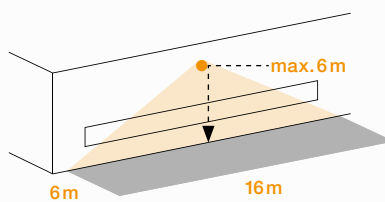

Rectangular illumination:  
XLED PRO Wide

## Good square or rectangular illumination. XLED PRO Square and XLED PRO Wide

In 2008 we launched the XLED 10 and 25 as the first manufacturer to put a sensor-LED floodlight on the market and set the standard. During the conceptual design phase of the next generation, two aspects were of key importance to us: the full adjustability of the floodlight head and a light pattern aligned to the application. This resulted in the completely new concept of XLED PRO Wide and Square being created: Wide for the illumination of rectangular areas along the sides of buildings and Square for the illumination of large areas. We achieve the evenness of light using a precisely calculated LED lens matrix. The sophisticated mechanism permits adjustment in all directions, catering to any specific lighting situation. To top it all, we have optimised the sensor and, by the way, the price as well.

## XLED PRO Square SL

### Powerful counterpart.

### The slave version for twice the lighting power.

Offered separately, the XLED PRO Square SL slave version is interconnected simply via cable, providing synchronous illumination for even larger areas. The XLED PRO Square also delivers 2400 lumens of light, features the unique lens matrix developed by STEINEL and comes with a fully swivelling and tilting flat design light head. For anyone wanting more, the XLED PRO Square XL model provides almost twice as much light. At 4400 lumens from just 48 W, the sun will then even shine at night.

# LED

30 years  
(Ø 4,5h/day)

# 24,8w

2400lm  
97lm/W

# 48w

4400lm  
92lm/W



4000 K  
neutral-white



IP 54




360°



energy  
saving

# 5 JAHRE GARANTIE

manufacturer's  
warranty


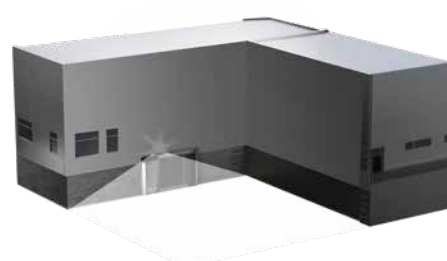


|                                  |                                                                                                     |
|----------------------------------|-----------------------------------------------------------------------------------------------------|
| EAN XLED Pro Square SL, white    | 4007841 010010                                                                                      |
| EAN XLED Pro Square SL, black    | 4007841 010034                                                                                      |
| EAN XLED Pro Square XL SL, white | 4007841 009984                                                                                      |
| EAN XLED Pro Square XL SL, black | 4007841 010003                                                                                      |
| Dimensions (H x W x D)           | 208 x 178 x 130 mm                                                                                  |
| Power supply                     | 220-240 V, 50 / 60 Hz                                                                               |
| Output                           | 24.8 W / 48 W (XL)                                                                                  |
| Luminous flux                    | 2400 lm / 4400 lm (XL)                                                                              |
| Efficiency                       | 97 lm/W / 92 lm/W (XL)                                                                              |
| Colour temperature               | 4000 K / SDCM 3                                                                                     |
| Colour rendering                 | Ra ≥ 80                                                                                             |
| LED life expectancy              | 50,000 h (L70B10 to LM80)                                                                           |
| LED cooling system               | Passive Thermo Control                                                                              |
| LED panel adjustability          | 90° vertically, 360° horizontally                                                                   |
| IP rating                        | IP54                                                                                                |
| Protection class                 | I                                                                                                   |
| Basic light level                | a) all night long,<br>b) 10 min after expiry of the set time.<br>3% basic light level (approx. 3 W) |
| Soft light start                 | Yes                                                                                                 |
| Material                         | UV-resistant plastic (base), aluminium (heat sink)                                                  |
| Temperature range                | -20 to +40°C                                                                                        |
| With lamp                        | STEINEL LED system                                                                                  |
| Lamp replaceable                 | No                                                                                                  |
| Weight                           | 1.6 kg                                                                                              |


#### Accessories

|                                 |                |
|---------------------------------|----------------|
| EAN Remote control RC9          | 4007841 007638 |
| EAN Remote control Smart Remote | 4007841 009151 |


Refer to the 'Accessories' section for further information.

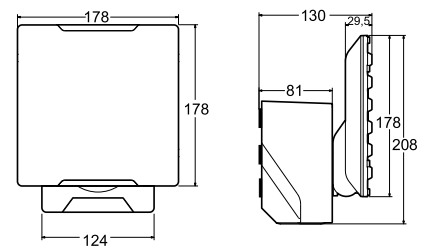

Light distribution curve for XLED PRO Square SL




Light distribution curve for XLED PRO Square XL SL



White

Black




Including STEINEL  
LED system



UV-resistant plastic



Intelligent  
LED cooling system



Interconnectable  
via cable,  
max. 10 floodlights



Linear basic light  
level 3% (only when  
interconnected  
with master)



Optional remote  
controls refer to  
page 304

