


Square illumination:  
XLED PRO Square

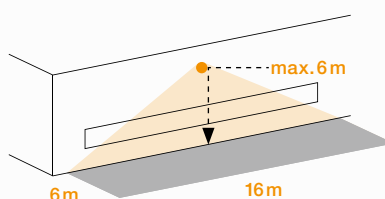

Rectangular illumination:  
XLED PRO Wide

## Good square or rectangular illumination. XLED PRO Square and XLED PRO Wide

In 2008 we launched the XLED 10 and 25 as the first manufacturer to put a sensor-LED floodlight on the market and set the standard. During the conceptual design phase of the next generation, two aspects were of key importance to us: the full adjustability of the floodlight head and a light pattern aligned to the application. This resulted in the completely new concept of XLED PRO Wide and Square being created: Wide for the illumination of rectangular areas along the sides of buildings and Square for the illumination of large areas. We achieve the evenness of light using a precisely calculated LED lens matrix. The sophisticated mechanism permits adjustment in all directions, catering to any specific lighting situation. To top it all, we have optimised the sensor and, by the way, the price as well.

## XLED PRO Wide SL

### Brightness far and wide.

#### The slave version for maximum illumination.

The perfect solution for extending a lighting system to cover particularly wide areas or provide uninterrupted illumination along buildings. Offered separately, the XLED PRO Wide SL without sensor is very easy to interconnect via cable. Invented by STEINEL, the lens matrix always guarantees perfect illumination in conjunction with the fully swivelling and tilting flat design light head. The powerful high-end LEDs impress with 2400 lumens of light.

Not bright enough? Not a problem: the XLED PRO Wide XL version finally turns night into day. Generated from 48 W, 4400 lumens provide floodlighting with a stadium-like atmosphere.

# LED

30 years  
(Ø 4,5h/day)

# 24,8w

2400lm  
97lm/W

# 48w

4400lm  
92lm/W



4000 K  
neutral-white



IP 54



360°



energy  
saving

# 5 JAHRE

GARANTIE

manufacturer's  
warranty



|                                     |                                                    |
|-------------------------------------|----------------------------------------------------|
| EAN XLED Pro Wide SL, white. ....   | 4007841 010232                                     |
| EAN XLED Pro Wide SL, black ....    | 4007841 010256                                     |
| EAN XLED Pro Wide XL SL, white .... | 4007841 010201                                     |
| EAN XLED Pro Wide XL SL, black .... | 4007841 010225                                     |
| Dimensions (H x W x D) ....         | 165 x 265 x 126 mm                                 |
| Power supply ....                   | 220-240 V, 50 / 60 Hz                              |
| Output ....                         | 24.8 W / 48 W (XL)                                 |
| Luminous flux ....                  | 2400 lm / 4400 lm (XL)                             |
| Efficiency ....                     | .97 lm/W / 92 lm/W (XL)                            |
| Colour temperature ....             | 4000 K / SDCM 3                                    |
| Colour rendering ....               | Ra ≥ 80                                            |
| LED life expectancy ....            | 50,000 h (L70B10 to LM80)                          |
| LED cooling system ....             | Passive Thermo Control                             |
| LED panel adjustability ....        | .90° vertically, 360° horizontally                 |
| IP rating ....                      | IP54                                               |
| Protection class ....               | ..I                                                |
| Basic light level ....              | a) all night long,                                 |
| .....                               | b) 10 min after expiry of the set time.            |
| .....                               | .....3% basic light level (approx. 3 W)            |
| Material ....                       | UV-resistant plastic (base), aluminium (heat sink) |
| Temperature range ....              | -20 to +40°C                                       |
| With lamp ....                      | STEINEL LED system                                 |
| Lamp replaceable ....               | ..No                                               |
| Weight ....                         | 1.87 kg                                            |



#### Optional accessories

|                                                             |                |
|-------------------------------------------------------------|----------------|
| EAN Remote control RC9 ....                                 | 4007841 007638 |
| EAN Remote control Smart Remote ....                        | 4007841 009151 |
| Refer to the 'Accessories' section for further information. |                |




White



Black

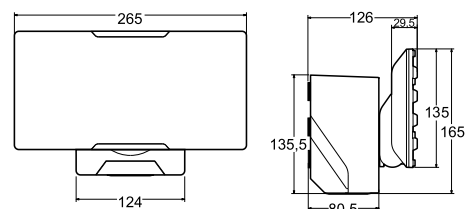

Light distribution curve for XLED PRO Wide SL



Light distribution curve for XLED PRO Wide XL SL




Including STEINEL LED system



UV-resistant plastic



Intelligent LED cooling system



Interconnectable via cable, max. 10 floodlights



Linear basic light level 3% (only when interconnected with master)



Optional remote controls refer to page 304

