

# IS 3360

With far-sightedness.

And all-round vision.

Large spaces, multi-storey car parks and production buildings with ceiling heights of up to 4 m rarely provide installation surfaces every metre. These environments call for motion detectors with a long reach. Like the IS 3360. It detects any tangential movement within 20 metres. Even installed at heights of up to 4 metres. In short: one IS 3360 covers an area of more than 1000 m<sup>2</sup>! STEINEL infrared technology that keeps its promises.



infrared  
sensor 360°



max. 20 m

**2000w**

max.



LiveLink



IP54/IP20



2,5 - 4m



2 - 1000 lux



5 sec - 15 min

**TEACH**


mode



energy  
saving

**5 JAHRE  
GARANTIE**

manufacturer's  
warranty

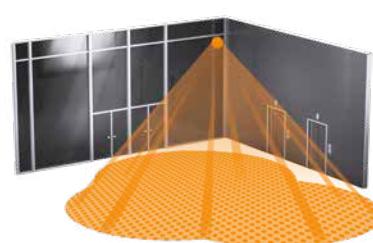

**IS 3360**

<b>Surface-mounted</b>	<b>square (65x95x95 mm) round (65xØ126 mm)</b>
EAN COM1	4007841 010478 . . . . . 4007841 033446
EAN PF	4007841 010515 . . . . . 4007841 033477
EAN KNX	4007841 058166 . . . . . 4007841 058180
EAN DALI	4007841 010560 . . . . . 4007841 033507
EAN DALI-2	4007841 057237 . . . . . 4007841 057251
EAN LiveLink	4007841 049362 . . . . . 4007841 049386
<b>Concealed</b>	<b>square (78x94x94 mm) round (78xØ124 mm)</b>
EAN COM1	4007841 033460 . . . . . 4007841 033453
EAN PF	4007841 033491 . . . . . 4007841 033484
EAN KNX	4007841 058173 . . . . . 4007841 058197
EAN DALI	4007841 033514 . . . . . 4007841 033521
EAN DALI-2	4007841 057244 . . . . . 4007841 057268
EAN LiveLink	4007841 049379 . . . . . 4007841 049393

You will find information on the interfaces from page 52 onwards.

Type	Motion detector
Sensor type	Passive infrared
Where to use	Indoors and outdoors
Installation	Ceiling
Mounting height	2.5 - 4 m
Recommended mounting height	2.8 m
Angle of coverage	360° with 180° angle of aperture
Capability of masking out individual segments	Yes
Reach	max. Ø 40 m tangential (1257 m <sup>2</sup> ), temperature-stabilised + precision adjustment using shrouds
Sensor system	11 detection levels, 1416 switching zones
Twilight setting	2 - 1000 lx
Teach function for twilight setting	Yes
Manual override	Selectable, 4 h
IP rating	Concealed: IP20 / surface-mounted: IP54
Temperature range	-20 to +50°C

**Optional accessories**

EAN black trim, surface-mounted, square	4007841 056711
EAN black trim, concealed, square	4007841 056728
EAN black trim, surface-mounted, round	4007841 056735
EAN black trim, concealed, round	4007841 056742
EAN User remote control RC5	4007841 592806
EAN Service remote control RC8	4007841 559410
EAN Remote control Smart Remote	4007841 009151
EAN Ceiling box Ø 68 mm	4007841 052812

Refer to the 'Accessories' section for further information.




Surface-mounted,  
square


Surface-mounted,  
round

Concealed, square


Concealed, round

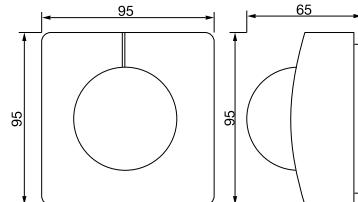

Surface-mounted, square  
For further designs, see page 56



IS 3360 detection zone  
Possible mounting height: 2.5 - 4 m  
Orange: radial  
Black: tangential



Also suitable for parallel operating mode.  
Intrinsic-light detection.

Further circuit diagrams starting on page 52

UV-resistant plastic



Large terminal compartment (surface-mounted only)



Optional remote controls  
refer to page 298



# Interfaces and wiring diagrams for 3000-series

## DALI

Digital DIM interface  
for controlling 1 lighting channel


**Power supply**  
220-240 V, 50 / 60 Hz

**Time setting**  
5 s – 15 min


**Control output**  
2-core DALI control cable / broadcast  
Controllable DALI electronic ballasts: 30 DALI  
electronic ballasts

**Constant-lighting control**  
**User-friendly DALI function, basic brightness**  
ON, OFF, 10–30 min, all night, 10–50%


Surface-mounted




Concealed



Master



Master/Slave



## DALI-2


Communication of information  
on presence and light level to a  
DALI application controller

**Power consumption**  
6 mA / 3 DALI users,  
12-22.5 V , no SELV  
(9 mA / 5 DALI users with HF 3360)



### DALI input device

DALI control line (multi-master capability for  
communication with DALI application controller/  
DALI sensor)

Surface-mounted





Concealed





## 3000-Series designs

### IS 3180 / IS 3360 / IS 3360 MX Highbay / IS 345 / IS 345 MX Highbay

Surface-mounted installation, square

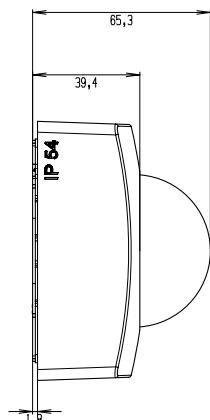
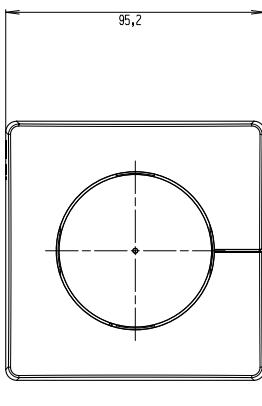


Concealed installation, square

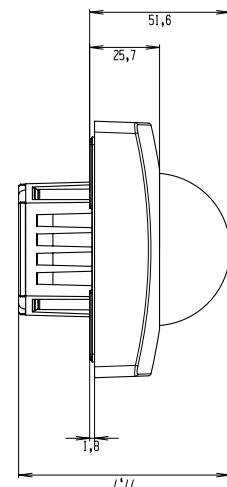
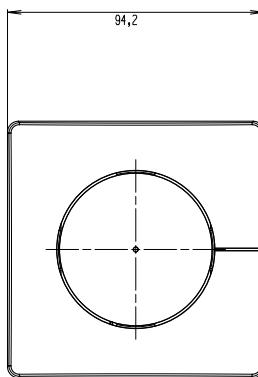


### HF 3360

Surface-mounted installation, square

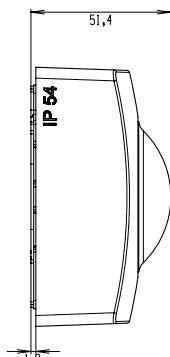



Concealed installation, square

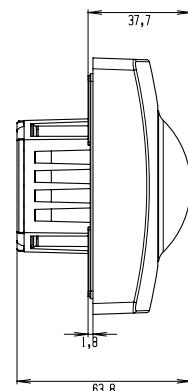

### Light Sensor Dual

Surface-mounted installation, square

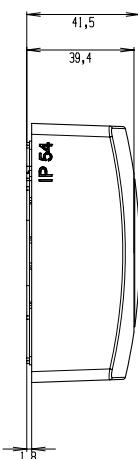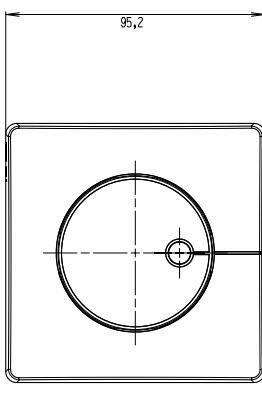

Concealed installation, square

