

IR Quattro SLIM XS

Our slimmest presence detector.

Now even smaller in concealed box format.

The extra slim IR Quattro SLIM XS presence detector virtually disappears in the wall or ceiling. Thanks to the new and practical concealed box format it forms a remarkably unobtrusive symbiosis with the office environment and can now be installed in any standard concealed box. In short: our slimmest presence detector would seem to be pretending it wasn't even there - and yet is absolutely present when it matters. To be prepared for any situation, a round SLIM XS is also available.

CONTROL
PRO
SYSTEM



Infrared sensor
360°



max. 4m x 4m
presence

1000w
max.

KNX

LiveLink



2,5 - 4m



2-1000 lux with
smart remote



5 sec - 60 min with
Smart Remote


TEACH
mode
with RC8

iQ

IQ mode

5 JAHRE
GARANTIE

manufacturer's
warranty

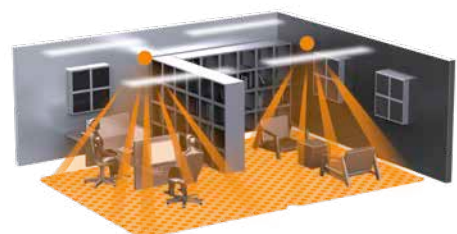

IR Quattro SLIM XSsquare (80x80x55 mm) . round (Ø 94x55 mm)



EAN COM14007841 0329514007841 035211
 EAN DALI-2.....4007841 057510.....4007841 057527
 EAN KNX.....4007841 0585004007841 058517
 EAN LiveLink4007841 0330404007841 035235

You will find information on the interfaces as well as wiring diagrams from page 142 onwards.

Type Presence detector
 Power supply 220-240V, 50/60Hz
 Sensor type Passive infrared
 Where to use Indoors
 Installation Ceiling
 Mounting height 2.5 - 4 m
 Recommended mounting height 2.8 m
 Parallel connection capability Yes
 Square detection zone, presence max. 4 x 4 m (16 m²)
 Square detection zone, radial max. 4 x 4 m (16 m²)
 Square detection zone, tangential max. 4 x 4 m (16 m²)
 Sensor system PIR with retina lens and hexagonal Fresnel structure
 Parallel-connected configurations Master/master, master/slave
 User-friendly setting Teach-In (with optional remote control RC8)
 Twilight setting 10 - 1000 lux, ∞/daylight
 IP rating IP20
 Temperature range 0 to +40°C
 IQ mode Yes
 Enclosure UV-resistant, paintable

Optional accessories

EAN User remote control RC54007841 592806
 EAN Service remote control RC84007841 559410
 EAN Remote control Smart Remote 4007841 009151
 Refer to the 'Accessories' section for further information.

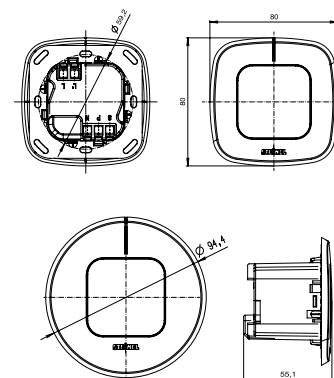

IR Quattro SLIM XS detection zone
 Possible mounting height: 2.5 - 4 m
 Orange: presence, tangential and radial

Wiring diagrams from page 142

Extremely slim
overall height



High-quality
retina lens



Can only be set using
optional remote con-
trols, see page 300

