

IR Quattro MICRO

Small, precise and effective.

Required by planners and architects, made by STEINEL.

The IR Quattro MICRO fulfills many wishes. Its small size and the low profile design make it perfect for applications where installations mustn't be allowed to interfere with the look of a ceiling. The size of the micro-precision lens is just 15 x 15 mm. Yet despite this size, its performance is nothing short of stunning. The 360° infrared presence detector covers 36 m². And with IP65 classification, you can install it in rooms exposed to moisture.

The IR Quattro MICRO – our smallest detector with huge potential.

CONTROL
PRO
SYSTEM



Infrared sensor
360°



max. 4 m x 4 m
presence

1000w
max.



2-5m

TEACH
mode



IQ-mode



energy
saving

5 JAHRE
GARANTIE

manufacturer's
warranty





EAN IR Quattro MICRO, COM1	4007841 053789
EAN IR Quattro MICRO, DALI-2	4007841 053871
EAN IR Quattro MICRO, KNX	4007841 053864



You will find information on the interfaces as well as wiring diagrams from page 142 onwards.

Type	Presence detector
Dimensions (ØxH)	Ø43.1 x 75.4 mm
Cable grip	Ø32.6 (33.5) x 100 mm
Power supply	220-240 V, 50 / 60 Hz
Sensor type	Passive infrared
Where to use	Indoors
Installation	Ceiling
Mounting height	2-5 m
Recommended mounting height	2.8 m
Square detection zone, presence	max. 4 x 4 m (16 m ²)
Square detection zone, radial	max. 4 x 4 m (16 m ²)
Square detection zone, tangential	max. 6 x 6 m (36 m ²)
Parallel-connected configurations	Master/master, master/slave
User-friendly setting	Teach-In (with optional remote control RC8)
Twilight setting	2-1000 lx, ∞/daylight
IQ mode	Yes
IP rating	IP65
Temperature range	-25 to +55°C
Enclosure	UV-resistant plastic (casing), HDPE (lens)

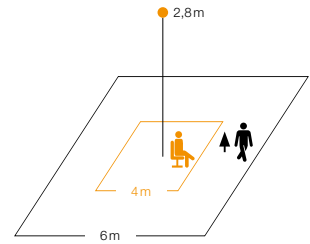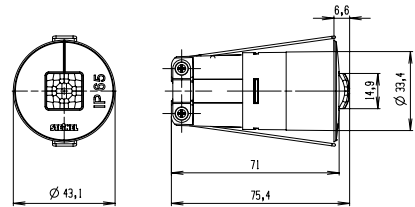

IR Quattro MICRO detection zone
Possible mounting height: 2-5 m
Orange: presence and radial
Black: tangential

Wiring diagrams from page 142

Optional accessories

EAN User remote control RC5	4007841 592806
EAN Service remote control RC8	4007841 559410
EAN Remote control Smart Remote	4007841 009151

Refer to the 'Accessories' section for further information.

Optional remote controls refer to page 300



Slim overall height



In-ceiling installation

