

# Hallway

**The specialist for long hallways and aisles.  
The better hallway sensor knows more.**

Direction of movement (coming and going) as well as if someone is on the left or the right. And this with a detection zone of 25 m. Naturally, the reach can also be adjusted in both directions. It provides more information than any other hallway sensor. Bluetooth technology ensures that the Hallway can be configured and interconnected into existing networks conveniently. And the distinguished design makes it an important member of the true presence® family.



360°



max. 25 x 3 m

**2000w**

max.



2 - 4m



2 - 1000 lux



5 sec - 15 min





0 - 255 min  
KNX-Version

**5 JAHRE**  
GARANTIE

manufacturer's  
warranty



EAN Hallway COM1, surface-mounted	4007841 057978
EAN Hallway COM1, concealed	4007841 057985
EAN Hallway COM2, surface-mounted	4007841 057992
EAN Hallway COM2, concealed	4007841 058005
EAN Hallway DALI, surface-mounted	4007841 058012
EAN Hallway DALI, concealed	4007841 058029
EAN Hallway KNX, concealed	4007841 058036
Type	Presence detector
Dimensions (HxWxD), concealed	102.7x102.7x66.5mm
Dimensions (HxBxT), surface-mounted	122.7x122.7x61.9mm
Power supply COM1/COM2/DALI	220-240 V, 50 / 60 Hz
KNX power supply	KNX bus voltage
Sensor type	High frequency
Where to use	Indoors
Installation	Ceiling
Mounting height	2-4 m
Recommended mounting height	2.8 m
Output COM1/COM2	max. 2000 W,
	max. 8 fluorescent lamps / LED lamps, $C \leq 176 \mu\text{F}$
	Output COM2: max. 230 W / 230 V, max. 1 A
Output DALI	1 x 2-conductor DALI-control line/
	broadcast + addressable for 64 electronic ballasts
KNX functions	Direction of movement, photo-cell controller,
	basic light level function, light level, HVAC output,
	constant-lighting control, light output 4x, humidity output,
	presence output, day / night function, dew point, temperature output
Angle of coverage	Corridor, both directions
Reach	Min. 3 x 2 m, max. 3 x 12.5 m in each direction
Reach digitally adjustable	yes
Interconnection	Wireless interconnection via Bluetooth
Twilight setting	2 - 1000lx
Time setting	COM1 / COM2 / DALI 0 sec - 30 min,
	KNX: 0 - 255 min
IP rating	Concealed: IP20 / surface-mounted: IP54
Temperature range	-20 to +50°C; 0 to +40°C (KNX)
Enclosure	UV-resistant plastic

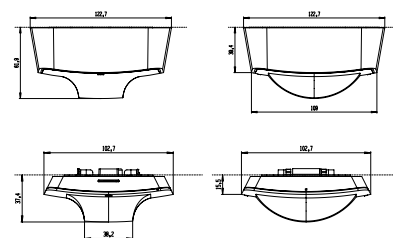

Hallway detection zone  
Possible mounting height: 2-4 m  
Orange: radial and tangential



Surface-mounted installation



Concealed installation



Concealed installation (KNX)

UV-resistant plastic



Configuration via Bluetooth and app

