

# IS D360

**Fits in any ceiling.**

**And goes with any spotlight.**

Control spotlights in suspended ceilings the more or less invisible way. The IS D360 fits in any standard spotlight surround. This is why at first glance it also looks like a normal lamp (e.g. GU10). The multi-lens only becomes apparent after taking a closer look. Cleverly integrated sensor technology from STEINEL.



infrared sensor 360°



max. 8m

**1000w**

max.



IP20



2,5 - 4 m



2 - 2000 lux




5 sec - 20 min





energy saving

**5 JAHRE GARANTIE**


manufacturer's warranty

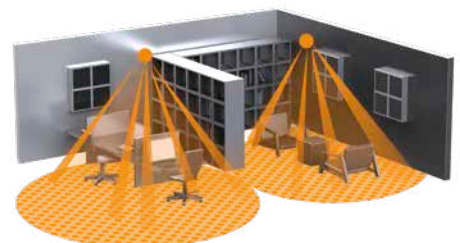

EAN IS D360	4007841 601317
Type	Motion detector
Dimensions (H x W x D)	83xØ82 mm
Power supply	230-240V, 50Hz
Sensor type	Passive infrared
Where to use	Indoors
Installation	Ceiling
Mounting height	2.5-4 m
Recommended mounting height	2.5 m
Output	max. 1000 W (resistive load), max. 4 fluorescent lamps / LED lamps, C ≤ 88 µF max. 500 VA (cos φ = 0.5)
Angle of coverage	360° with 180° angle of aperture
Reach	max. Ø 16 m tangential (201 m <sup>2</sup> ), temperature-stabilised
Sensor system	10 detection levels, 720 switching zones
Twilight setting	2 - 2000 lx
Time setting	5 sec - 20 min
Manual override	Selectable, 4 h
IP rating	IP20
Temperature range	-20 to +50°C
Accessory included	White standard trim

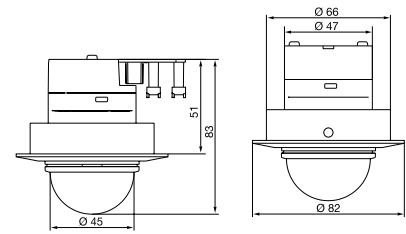

IS D360 detection zone  
Possible mounting height: 2.5 - 4 m  
Orange: radial  
Black: tangential

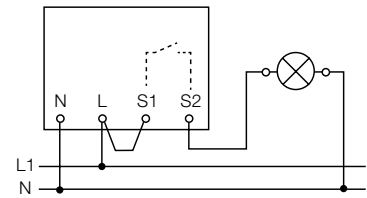

Also suitable for parallel operating mode.

Further circuit diagrams starting on page 82

Any surround can be used. Installation dimensions:  
outer diam. = Ø 73 mm,  
install. depth = 53 mm

