

RAMIFICATII PREUMPLUTE CU GEL - Little Joint Y



**Ray
Tech**



- Pentru etansarea, protejarea si realizarea conexiunilor electrice in conditii de siguranta
- Micro-imbinare preumpluta cu gel
- Echipate cu presetupe si cleme
- Submersibile
- Pot fi montate sub pamant
- Refolosibil si fara termen de expirare
- Gata de utilizare cu dimensiuni reduse
- Grad de protectie : IP68 / IP69K
- Halogen free
- Rezistenta UV
- Temperatura de lucru: max.+90°C
- Temperatura de instalare: -40°C ... +50°C



IP69K
OFFICIALLY
TESTED

IP68
OFFICIALLY
TESTED


IMQ

COD	DENUMIRE	SECTIUNI CABLU (n° x mm ²)		CABLU Ø (mm)		DIMENSIUNI AxBxC (mm)	PACK. (buc)
		T(in)	B (out)	min	max		
44-BARNEY-Y	BARNEY Y	1 x 4	1 x 1.5	6	10	88 x 55 x 22	1
		1 x 2.5	1 x 2.5				
44-FRED-Y	FRED Y	3 x 4	3 x 1.5	8	13	110 x 72 x 25	1
		3 x 2.5	3 x 2.5				
44-DINO-Y	DINO Y	5 x 6	5 x 1.5	14	19	160 x 75 x 37	1
		5 x 4	5 x 2.5				


RAMIFICATII PREUMPLUTE CU GEL - Little Joint X



**Ray
Tech**

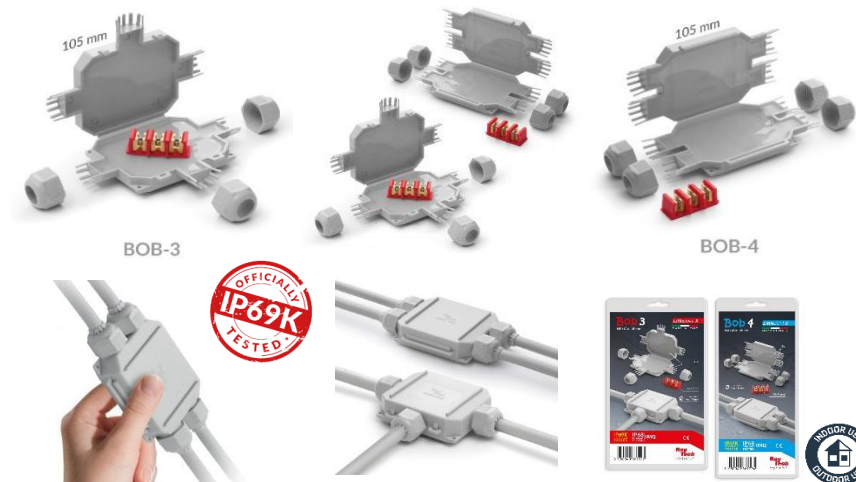

- Pentru etansarea, protejarea si realizarea conexiunilor electrice in conditii de siguranta
- Micro-imbinare preumpluta cu gel
- Echipate cu presetupe si cleme
- Submersibile
- Pot fi montate sub pamant
- Refolosibil si fara termen de expirare
- Gata de utilizare cu dimensiuni reduse
- Grad de protectie : IP68 / IP69K
- Halogen free
- Rezistenta UV
- Temperatura de lucru: max.+90°C
- Temperatura de instalare: -40°C ... +50°C



IP69K
OFFICIALLY
TESTED

IP68
OFFICIALLY
TESTED

IMQ

COD	DENUMIRE	SECTIUNI CABLU (n° x mm ²)		CABLU Ø (mm)		DIMENSIUNI AxBxC (mm)	PACK. (buc)
		T(in)	B (out)	min	max		
44-BOB-3	BOB3		2 cabluri	8	13	105 x 80 x 25	1
		1 cablu	3 x 4				
		3 x 4	3 x 2.5				
44-BOB-4	BOB4		2 cabluri	8	13	105 x 65 x 25	1
		1 cablu	3 x 4				
		3 x 4	3 cabluri				
		3 x 2.5	3 x 2.5				