






Functional principle:
Phase inverter



CEE Phase inverters

Phase inverter plug IP44

SHARK

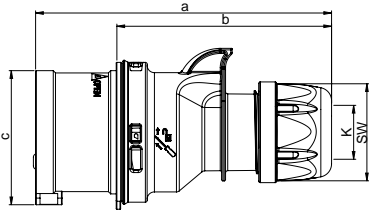


	16 Amp		32 Amp	
	4	5	4	5
a [mm]	128	134	150	155
b [mm]	92	98	104	109
c [mm]	53	61	63	70
K_cable Ø [mm]	6-15	8-16	11,5-20	11,5-22
: L U H 2 H [L E O H class 5 or 6 [mm ²]]	O	1-2,5	2,5-6	
Contact screws [Ncm]	100		110	
SW [mm]	42	42	50	50
Weight [g]	131	154	204	236

- with screw terminals
- housing material: PA6
- contacts: nickel-plated contacts

IP44 splashproof

Phase inverter plug IP44

SHARKTT

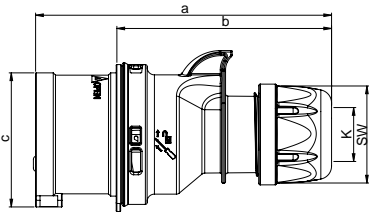


	16 Amp		32 Amp	
		5		5
a [mm]		134		155
b [mm]		98		109
c [mm]		61		70
K_cable Ø [mm]		8-16		11,5-22
: L U H 2 H [L E O H class 5 or 6 [mm ²]]	O	1-2,5	2,5-6	
Contact screws [Ncm]	100		110	
SW [mm]		42		50
Weight [g]		156		237

- L1, N, PE = screwless connection terminals
- L2, L3 = screw terminals
- housing material: PA6
- contacts: nickel-plated contacts

IP44 splashproof

Phase inverter plug IP67

SHARK

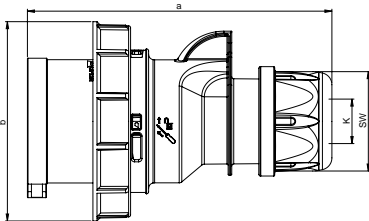


	16 Amp		32 Amp	
	4	5	4	5
a [mm]	128	134	150	155
b [mm]	79	87	93	100
c [mm]				
d [mm]				
K_cable Ø [mm]	6-15	8-16	11,5-20	11,5-22
: L U H 2 H [L E O H class 5 or 6 [mm ²]]	O	1-2,5	2,5-6	
Contact screws [Ncm]	100		110	
SW [mm]	42	42	50	50
Weight [g]	153	183	245	280

- with screw terminals
- housing material: PA6
- contacts: nickel-plated contacts

IP66/67 watertight

Phase inverter plug IP44/54

GRIP

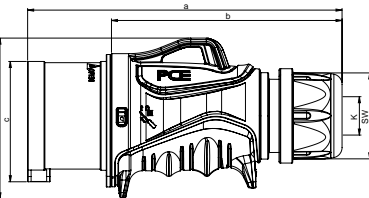


	16 Amp		32 Amp	
	5		5	
a [mm]	157		182	
b [mm]	117		134	
c [mm]	61		70	
d [mm]	79		93	
K_cable Ø [mm]		8-16		11,5-22
: L U H 2 H [L E O H class 5 or 6 [mm ²]]	O	1-2,5	2,5-6	
Contact screws [Ncm]	100		110	
SW [mm]		42		50
Weight [g]		180		273

- with screw terminals
- housing material: 2-components (PA6 / TPE)
- contacts: nickel-plated contacts

IP44/54 splashproof

Phase inverter plug IP44/54

GRIPTT

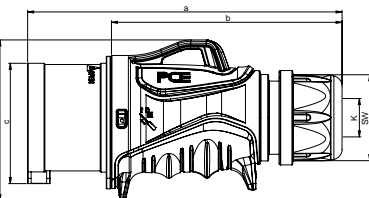

	16 Amp		32 Amp	
	5		5	
a [mm]	157		182	
b [mm]	117		134	
c [mm]	61		70	
d [mm]	79		93	
K_cable Ø [mm]		8-16		11,5-22
: L U H 2 H [L E O H class 5 or 6 [mm ²]]	O	1-2,5	2,5-6	
Contact screws [Ncm]	100		110	
SW [mm]		42		50
Weight [g]		183		279

- L1, N, PE = screwless connection terminals
- L2, L3 = screw terminals
- housing material: 2-components (PA6 / TPE)
- contacts: nickel-plated contacts

IP44/54 splashproof

Amp.	Poles	pack. unit
16	4	10
16	5	10
32	4	10
32	5	10

50/60Hz	50/60Hz
4p= 9h	4p+5p= 6h
Cat.No.	Cat.No.
7014-9	7014-6 7015-6
7024-9	7024-6 7025-6



16	5	10
32	5	10

7015-6TT
7025-6TT



16	4	10
16	5	10
32	4	10
32	5	10

70142-9	70142-6 70152-6
70242-9	70242-6 70252-6



16	5	10
32	5	10

70153-6
70253-6



16	5	10
32	5	10

70153-6TT
70253-6TT

