


KM640081  
BS EN 60598-2-22


\*They have BSI & CNBOP-PIB certifications

## Mounting method

### Ceiling or wall mounting



### Recessed mounting on suspended ceiling




### Recessed mounting on a suspended ceiling with the A-3008 base and the SP-116 hanging marking panel




### Ceiling installation with SP-116 marking panel



## Dimensions

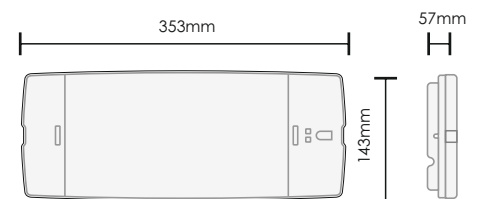

Required opening for suspended wall or ceiling installation




## Dimensions




## Photometric


### GR-1310-4P



### GR-1310-6P



### GR-1310-15L



Internal selection - without LI

CODE	TYPE	ST	M	NM						
923131500	GR-1315/15L*	✓	✓	—	IP40	3,6V/600mAh Ni-Cd	1,5 h	3,4W/3,8VA	105/105 lm	787 gr.
923131600	GR-1316/15L*	✓	✓	—	IP40	3,6V/1,5Ah Ni-Cd	3 h	3,3W/3,7VA	105/105 lm	866 gr.
923131501	GR-1315/30L*	✓	✓	—	IP40	3,6V/1,5Ah Ni-Cd	1,5 h	4,5W/4,9VA	210/210 lm	866 gr.
923131601	GR-1316/30L*	✓	✓	—	IP40	3,6V/3Ah Ni-Cd	3 h	5,3W/5,6VA	210/210 lm	934 gr.
923131502	GR-1315/4P	✓	✓	—	IP40	4,8V/1,5Ah Ni-Cd	1,5 h	4,7W/5,1VA	175/350 lm	930 gr.
923131503	GR-1315/6P	✓	✓	—	IP40	4,8V/3Ah Ni-Cd	1,5 h	6,2W/6,5VA	245/480 lm	1020 gr.
923131602	GR-1316/4P	✓	✓	—	IP40	4,8V/3Ah Ni-Cd	3 h	5,3W/5,7VA	175/350 lm	1020 gr.
923131603	GR-1316/6P	✓	✓	—	IP40	4,8V/4Ah Ni-MH	3 h	6,2W/6,5VA	245/480 lm	1060 gr.
923131002	GR-1310/4P	✓	—	✓	IP40	4,8V/1,5Ah Ni-Cd	1,5 h	4,3W/4,7VA	350 lm	985 gr.
923131003	GR-1310/6P	—	—	✓	IP40	4,8V/3Ah Ni-Cd	1,5 h	3,5W/4VA	480 lm	1075 gr.
923131202	GR-1312/4P	—	—	✓	IP40	4,8V/3Ah Ni-Cd	3 h	4,6W/4,9VA	350 lm	1075 gr.
923131203	GR-1312/6P	—	—	✓	IP40	4,8V/4Ah Ni-MH	3 h	4,9W/5,2VA	480 lm	1125 gr.
923131004	GR-1310/12L/180	—	✓	✓	IP40	3,6V/1Ah Ni-Cd	3 h	2,9W/3,2VA	38/100 lm	845 gr.
923131005	GR-1310/12L/90	—	✓	✓	IP40	3,6V/600mAh Ni-Cd	1,5 h	2,9W/3,2VA	40/100 lm	835 gr.
923131000	GR-1310/15L*	—	✓	✓	IP40	3,6V/600mAh Ni-Cd	1,5 h	3,1W/3,3VA	30/105 lm	841 gr.
923131200	GR-1312/15L*	—	✓	✓	IP40	3,6V/1,5Ah Ni-Cd	3 h	3,4W/3,6VA	30/105 lm	918 gr.
923131001	GR-1310/30L*	—	✓	✓	IP40	3,6V/1,5Ah Ni-Cd	1,5 h	3,3W/3,5VA	30/210 lm	918 gr.
923131201	GR-1312/30L*	—	✓	✓	IP40	3,6V/3Ah Ni-Cd	3 h	4,5W/4,8VA	30/210 lm	990 gr.

The packaging contains 15pcs.  
\*They have BSI & CNBOP-PIB certifications

SINGLE-SIDE PICTOGRAMS				
CODE	TYPE	DESCRIPTION	INCLUDED	ON DEMAND
807131007	S-13100/LO	Pictogram Left ISO single side 26m	✓	
807131005	S-13100/RO	Pictogram Right ISO single side 26m	✓	
807131009	S-13100/DO	Pictogram Down ISO single side 26m	✓	
807131011	S-13100/UO	Pictogram Up ISO single side 26m		✓

ACCESSORIES				
CODE	TYPE	DESCRIPTION	ON DEMAND	
980330180	A-3018	Suspended ceiling mounting springs	✓	10,9 gr.
922116006	SP-116/RLDUB	Double sided Plexiglass 4mm marking panel with all directions (Can be used only when the luminaire is installed on the ceiling)	✓	434 gr.



A-3018



SP-116/RLDUB

BATTERIES		
CODE	TYPE	DESCRIPTION
601003606	A-926	Battery 3,6V/600mAh Ni-Cd
601213615	B-972/HT	Battery 3,6V/1,5Ah Ni-Cd
601214815	B-973/HT	Battery 4,8V/1,5Ah Ni-Cd
601233630	B-949/HT	Battery 3,6V/3Ah Ni-Cd
601214830	B-941/HT	Battery 4,8V/3Ah Ni-Cd
601134840	B-936/HT60SC	Battery 4,8V/4Ah Ni-Mh
601233610	A-931/HT	Battery 3,6V/1Ah Ni-Cd