




PROFILE STORE PRO LED 7 W 8318

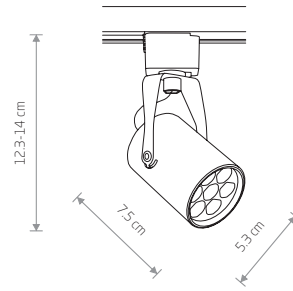


PROFILE STORE PRO LED 7W

Painted aluminum, plastic

■ 8316	3000K	■ 8318	3000K
■ 8315	4000K	■ 8317	4000K



PROFILE STORE PRO LED 12W 8323

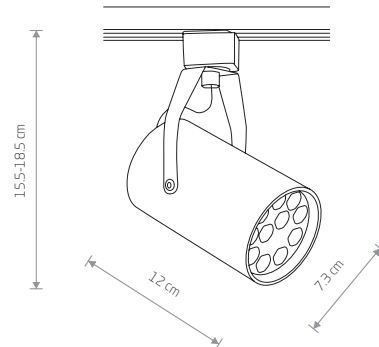


PROFILE STORE PRO LED 12W

Painted aluminum, plastic

■ 8321	3000K	■ 8323	3000K
■ 8320	4000K	■ 8322	4000K



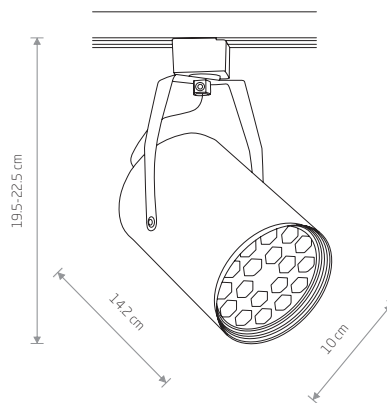

PROFILE STORE PRO LED 18W

painting aluminum, plastic

- 8325 3000K
 8327 3000K
- 8324 4000K
 8326 4000K

PROFILE STORE PRO LED 18W 8326

Item No.	Power	Colour temp.	Luminous flux	Beam angle	Colour Rendering Index (CRI)	Input	Safety type	Power factor	Ingress protection	Lifetime
8315	7W LED	4000K	680 lm	24 °	≥ 80	~220-230 V, 50/60 Hz	☐	>0,5	IP20	30000h
8316	7W LED	3000K	630 lm	24 °	≥ 80	~220-230 V, 50/60 Hz	☐	>0,5	IP20	30000h
8317	7W LED	4000K	560 lm	24 °	≥ 80	~220-230 V, 50/60 Hz	☐	>0,5	IP20	30000h
8318	7W LED	3000K	600 lm	24 °	≥ 80	~220-230 V, 50/60 Hz	☐	>0,5	IP20	30000h
8320	12W LED	4000K	1100 lm	24 °	≥ 80	~220-230 V, 50/60 Hz	☐	>0,5	IP20	30000h
8321	12W LED	3000K	1000 lm	24 °	≥ 80	~220-230 V, 50/60 Hz	☐	>0,5	IP20	30000h
8322	12W LED	4000K	960 lm	24 °	≥ 80	~220-230 V, 50/60 Hz	☐	>0,5	IP20	30000h
8323	12W LED	3000K	930 lm	24 °	≥ 80	~220-230 V, 50/60 Hz	☐	>0,5	IP20	30000h
8324	18W LED	4000K	1700 lm	24 °	≥ 80	~220-230 V, 50/60 Hz	☐	>0,5	IP20	30000h
8325	18W LED	3000K	1440 lm	24 °	≥ 80	~220-230 V, 50/60 Hz	☐	>0,5	IP20	30000h
8326	18W LED	4000K	1700 lm	24 °	≥ 80	~220-230 V, 50/60 Hz	☐	>0,5	IP20	30000h
8327	18W LED	3000K	1600 lm	24 °	≥ 80	~220-230 V, 50/60 Hz	☐	>0,5	IP20	30000h

WHITE

BLACK



PROFILE IRIS LED 12W 9000

