



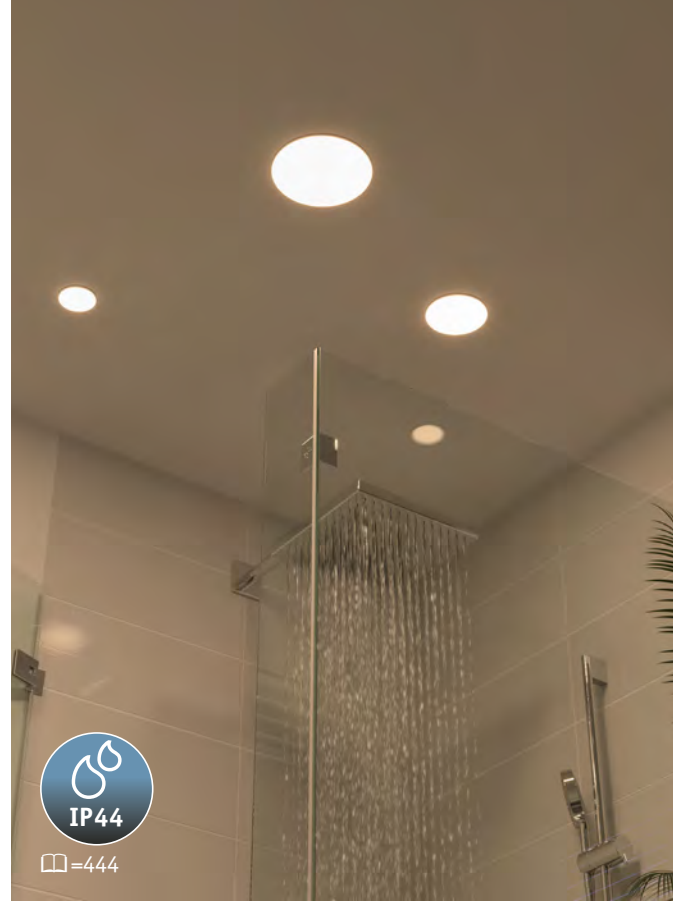


LED panels combine full coverage room light with the benefits of recessed luminaires. The attractive, frameless design blends easily with any interior style. Recessed panels with adjustable spring clamps are a perfect replacement for obsolete recessed luminaire systems. Our great range is rounded off with controllable and smart models.

Los paneles LED combinan una luz difusa con las ventajas de las luminarias empotrables. Las agradables variantes sin marco se integran discretamente en cualquier estancia. Una solución ideal para sustituir sistemas de luminarias empotrables anticuados son los paneles empotrables con muelles de sujeción regulables. Las variantes controlables e inteligentes completan de forma óptima el amplio surtido.

i pannelli LED coniugano la luce d'ambiente piatta con i vantaggi dei faretti a incasso. Varianti senza cornice con una luce confortevole si integrano in ogni ambiente in modo discreto. I pannelli a incasso con molle di fissaggio regolabili sono ideali per sostituire sistemi di faretti a incasso obsoleti. Varianti comandabili e smart completano il vasto assortimento in modo ottimale.

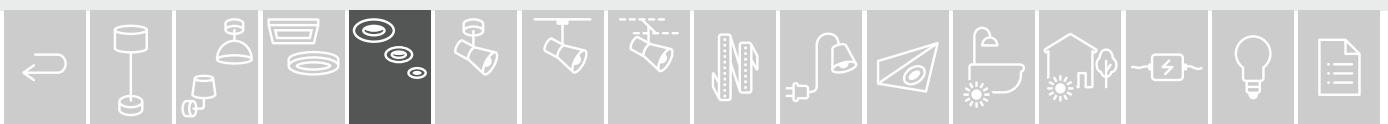



Quality Line Panel IP44

Plastic Plástico Plastica

neutral white = 4.000 K

	ø115 mm						
	W	671 lm		incl. 1×6 W	↕35 mm	↔↔100 mm	EAN 4000870 920589 920.58
	CM	671 lm		incl. 1×6 W	↕35 mm	↔↔100 mm	EAN 4000870 920701 920.70
↔↔115 ↗115 mm							
	W	671 lm		incl. 1×6 W	↕35 mm	↔↔105x105 mm	EAN 4000870 920640 920.64
	CM	671 lm		incl. 1×6 W	↕35 mm	↔↔105x105 mm	EAN 4000870 920763 920.76
ø170 mm							
	W	1.262 lm		incl. 1×12 W	↕35 mm	↔↔150 mm	EAN 4000870 920596 920.59
	CM	1.262 lm		incl. 1×12 W	↕35 mm	↔↔150 mm	EAN 4000870 920718 920.71
	↔↔165 ↗165 mm						
	W	1.263 lm		incl. 1×12 W	↕35 mm	↔↔155x155 mm	EAN 4000870 920657 920.65
	CM	1,263 lm		incl. 1×12 W	↕35 mm	↔↔155x155 mm	EAN 4000870 920770 920.77
ø220 mm							
	W	2.011 lm		incl. 1×18 W	↕35 mm	↔↔200 mm	EAN 4000870 920602 920.60
	CM	2.011 lm		incl. 1×18 W	↕35 mm	↔↔200 mm	EAN 4000870 920725 920.72
	↔↔220 ↗220 mm						
	W	2.011 lm		incl. 1×16,5 W	↕35 mm	↔↔205x205 mm	EAN 4000870 920664 920.66
	CM	2.011 lm		incl. 1×16,5 W	↕35 mm	↔↔205x205 mm	EAN 4000870 920787 920.78

