


# & (( :DOO VRFNHW V COMBO

## :DOO VRFNHW & 20% 2 , 3

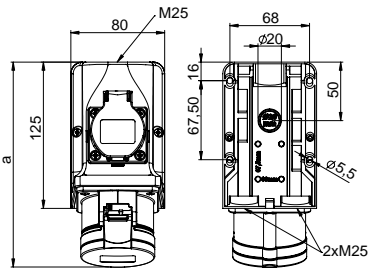


angle=15°

	\$ P S			\$ P S		
3 ROHV	3	4	5	3	4	5
a [mm]	175	176	176	188	188	188
+HLJKW [mm]	127	130	133	136	136	141
M [mm]	3x25	3x25	3x25	3x25	3x25	3x25
:LUH 2H[LEΦH [mmO [mm	1-2,5			2,5-6		
:LUH VROΦG [mm] KWLJ [mm]				2,5-10		
&RQWDFW VFUHZVEHΦ (& (100				110		
6FUHZ WHUPLQDOPHO [Ncm]				120		
:HLJKW [g]	388	405	424	455	470	481

- with screw terminals
- wall socket with integrated safety socket according to Austrian/German system
- connecting terminals up to 10 mm<sup>2</sup>
- a UHGD \ ZLUHG
- for Combo-wall socket 32A the safety socket is protected by fuse (10A slow)
- housing material: PA6
- contacts: brass
  - to order nickel-plated contacts please add a "v" e.g. 9215-6v
- top, 2x bottom or rear entry
- incl. threaded cable grommet

IP44 splashproof

## :DOO VRFNHW & 20% 2 , 3

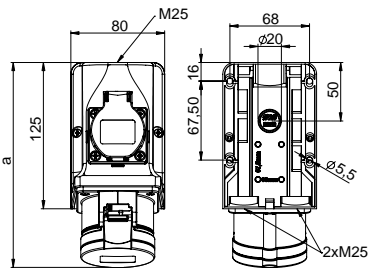


angle=15°

	\$ P S			\$ P S		
3 ROHV	3	4	5	3	4	5
a [mm]	175	176	176	188	188	188
+HLJKW [mm]	127	130	133	136	136	141
M [mm]	3x25	3x25	3x25	3x25	3x25	3x25
:LUH 2H[LEΦH [mmO [mm	1-2,5			2,5-6		
:LUH VROΦG [mm] KWLJ [mm]				2,5-10		
&RQWDFW VFUHZVEHΦ (& (100				110		
6FUHZ WHUPLQDOPHO [Ncm]				120		
&RQWDFW VFUHZVEHΦ '66' [Ncm]				80		
:HLJKW >J@	353	370	389	410	425	436

- with screw terminals
- wall socket with integrated safety socket according to Austrian/German system
- connecting terminals up to 10 mm<sup>2</sup>
- a XQZLUHG
- for Combo-wall socket 32A the safety socket is protected by fuse (10A slow)
- housing material: PA6
- contacts: brass
  - to order nickel-plated contacts please add a "v" e.g. 9215-6v
- top, 2x bottom or rear entry
- incl. threaded cable grommet

IP44 splashproof

## :DOO VRFNHW ZLWK VZLWFK , 3

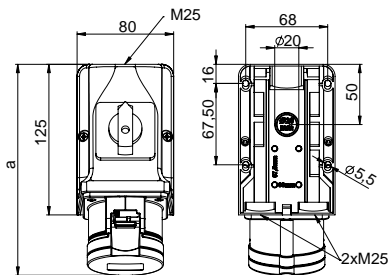

angle=15°

	\$ P S		\$ P S	
3 ROHV	5		5	
a [mm]	176		188	
+HLJKW [mm]	133		143	
M [mm]	3x25		3x25	
:LUH 2H[LEΦH [mmO [mm	1-2,5		2,5-6	
:LUH VROΦG [mm] KWLJ [mm]			2,5-10	
:HLJKW [g]	448		543	

- with screw terminals
- wall socket with integrated safety socket (2 1 2)) VZLWFK \$& \$
- connecting terminals up to 10 mm<sup>2</sup>
- a SUHZLUHG
- housing material: PA6
- contacts: brass
  - to order nickel-plated contacts please add a "v" e.g. 75915-6v
- top, 2x bottom or rear entry
- incl. threaded cable grommet

IP44 splashproof

Amp.	Poles	pack. unit
16	3	5
16	4	5
16	5	5
32	3	5
32	4	5
32	5	5

50/60Hz 3p=6h 4p+5p= 9h	50/60Hz 3p= 9h 4p+5p= 6h
Cat.No.	Cat.No.
9213-6	
9214-9	9214-6
	9215-6
9223-6	
	9224-6
	9225-6



9215-6

16	3	5
16	4	5
16	5	5
32	3	5
32	4	5
32	5	5

Z	
9214-9w	Z
	Z
Z	
	Z
	Z



9215-6w

16	5	5
32	5	5

	75915-6
	75925-6



75915-6

