




ECO LIGHT




*They have BSI certification

1-3-8h	IP54	ST SELF TESTING	CE		20m
Ni-Cd	Ni-MH				

Mounting method

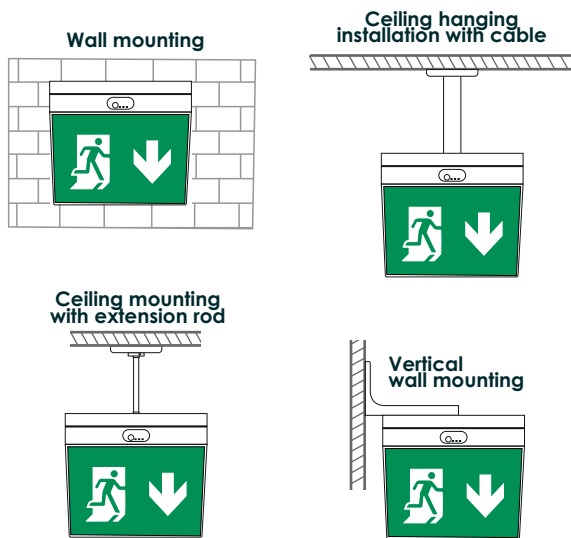

Dimensions

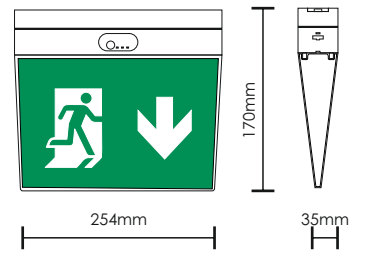

CODE	TYPE	ST	M	NM						
922502051	KLR-20/ST*	✓	✓	✓	IP54	3,6V/1,5Ah Ni-Mh	1-3 h	3,5W/4VA	80/250 80/110 80/15m	816 gr.
922502050	KLR-20	—	✓	✓	IP54	3,6V/1Ah Ni-Cd	3 h	3,2W/3,4VA	75/75m	816 gr.

SINGLE-SIDE PICTOGRAMS				
CODE	TYPE	DESCRIPTION	INCLUDED	ON DEMAND
804020001	SW-20/L	Marking overlay with left indication 20m	✓	
804020000	SW-20/R	Marking overlay with right indication 20m	✓	
804020003	SW-20/DL	Marking overlay with down left indication 20m	✓	
804020002	SW-20/DR	Marking overlay with down right indication for 20m	✓	
804020004	SW-20/UR	Marking overlay with up right indication 20m		✓
804020005	SW-20/UL	Marking overlay with up left indication 20m		✓


ACCESSORIES ON DEMAND			
CODE	TYPE	DESCRIPTION	
927321300	A-2130	Set of accessories (1m) for ceiling mounting (white)	375 gr.
927321310	A-2131	Set of accessories (0,5m) for ceiling mounting (white)	280 gr.
927321320	A-2132	Set of accessories (0,25m) for ceiling mounting (white)	139 gr.
927321330	A-2133	Accessory for vertical wall mounting (white)	108 gr.
927321360	A-2136	Accessory set for ceiling mounted hanging installations with 2,5m cable	164 gr.
927252000	A-2520/PL/ST	Suspended ceiling base for self-testing luminary KLD-xx	195 gr.
927252001	A-2520/PL	Suspended ceiling base	202 gr.



A-2130, A-2131, A-2132



A-2133



A-2136

BATTERIES		
CODE	TYPE	DESCRIPTION
601103612	A-965/HT	Battery 3,6V/1,2Ah Ni-Mh
601223610	A-938/HT	Battery 3,6V/1Ah Ni-Cd