

# EASY LIGHT

The Easy Light luminaire family is the cornerstone of Olympia Electronics emergency lighting systems. With a classic design and low cost, the Easy Light luminaire family has multiple versions that enable them to satisfy the demands for emergency lighting of various installations such as hospitals, hotels, and schools.

The high luminous flux output versions 4P and 6P can be used in large rooms with high ceilings whereas the availability of versions with 90 minutes, 3 hours, or 8

hours autonomy as well as the double-sided versions GR-39X/L, allow the Easy Light luminaire family to satisfy the majority of emergency lighting specifications and requirements.

The A-3018 accessory enables the recessed installation of the Easy Light luminaires on false ceilings. Additionally, the SP-116 and SP-116/P/X signs convert the luminaires to double-sided emergency exit signs.




GR-3xx/A

<b>CE</b>	26m		IP40
		Ni-Cd	<b>ST</b> SELF TESTING
	1,5-8h		

GR-13xx

<b>CE</b>	26m		IP40
		Ni-Cd	<b>ST</b> SELF TESTING
	1,5-3h		

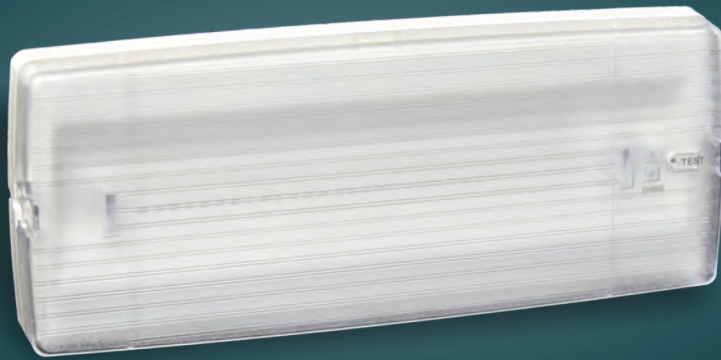


KM640081  
BS EN 60598-2-22


\*They have BSI & CNBOP-PIB certifications

## Mounting method

### Ceiling or wall mounting



### Recessed mounting on suspended ceiling



### Recessed mounting on a suspended ceiling with the A-3008 base and the SP-116 hanging marking panel




### Ceiling installation with SP-116 marking panel




### Dimensions

SP-116



### Dimensions

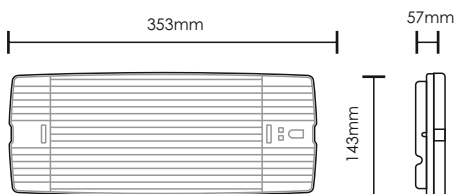


### Required opening for suspended wall or ceiling installation




### Photometric

GR-315/4P/A GR-315/6P/A



GR-315/15L/A GR-315/30L/A



CODE	TYPE	ST	M	NM						
923315024	GR-315/15L/A*	✓	✓	—	IP40	3,6V/600mAh Ni-Cd	1,5 h	3,4W/3,8VA	105/105 lm	806 gr.
923316020	GR-316/15L/A*	✓	✓	—	IP40	3,6V/1,5Ah Ni-Cd	3 h	3,3W/3,7VA	105/105 lm	883 gr.
923315025	GR-315/30L/A*	✓	✓	—	IP40	3,6V/1,5Ah Ni-Cd	1,5 h	4,5W/4,9VA	210/210 lm	883 gr.
923316021	GR-316/30L/A*	✓	✓	—	IP40	3,6V/3Ah Ni-Cd	3 h	5,3W/5,6VA	210/210 lm	940 gr.
923315026	GR-315/4P/A	✓	✓	—	IP40	4,8V/1,5Ah Ni-Cd	1,5 h	4,7W/5,1VA	175/350 lm	940 gr.
923315027	GR-315/6P/A	✓	✓	—	IP40	4,8V/3Ah Ni-Cd	1,5 h	6,2W/6,5VA	245/480 lm	1025 gr.
923316022	GR-316/4P/A	✓	✓	—	IP40	4,8V/3Ah Ni-Cd	3 h	5,3W/5,7VA	175/350 lm	1000 gr.
923316023	GR-316/6P/A	✓	✓	—	IP40	4,8V/4Ah Ni-MH	3 h	6,2W/6,5VA	245/480 lm	1065 gr.
923308003	GR-308/15L/A	✓	✓	—	IP40	3,6V/3Ah Ni-Cd	8 h	3,7W/4VA	125/125 lm	825 gr.
923310048	GR-310/12L/180/A	—	✓	✓	IP40	3,6V/1Ah Ni-Cd	3 h	2,9W/3,2VA	38/100 lm	840 gr.
923310049	GR-310/12L/90/A	—	✓	✓	IP40	3,6V/600mAh Ni-Cd	1,5 h	2,9W/3,2VA	40/100 lm	850 gr.
923310047	GR-310/15L/A*	—	✓	✓	IP40	3,6V/600mAh Ni-Cd	1,5 h	3,1W/3,3VA	30/105 lm	838 gr.
923312026	GR-312/15L/A*	—	✓	✓	IP40	3,6V/1,5Ah Ni-Cd	3 h	3,4W/3,6VA	30/105 lm	915 gr.
923310046	GR-310/30L/A*	—	✓	✓	IP40	3,6V/1,5Ah Ni-Cd	1,5 h	3,3W/3,5VA	30/210 lm	900 gr.
923312025	GR-312/30L/A*	—	✓	✓	IP40	3,6V/3Ah Ni-Cd	3 h	4,5W/4,8VA	30/210 lm	1028 gr.
923309002	GR-309/15L/A	—	✓	✓	IP40	3,6V/3Ah Ni-Cd	8 h	4,9W/5,2VA	35/125 lm	1000 gr.

The packaging contains 15pcs.  
\*They have BSI & CNBOP-PIB certifications

#### SINGLE-SIDE PICTOGRAMS

CODE	TYPE	DESCRIPTION	INCLUDED	ON DEMAND	
807310008	S-31101/LO	Pictogram Left ISO single side 26m	✓		
807310006	S-31101/RO	Pictogram Right ISO single side 26m	✓		
807310010	S-31101/DO	Pictogram Down ISO single side 26m	✓		
807310012	S-31101/UO	Pictogram Up ISO single side 26m		✓	

#### ACCESSORIES

CODE	TYPE	DESCRIPTION	ON DEMAND	
980330180	A-3018	Suspended ceiling mounting springs	✓	10,9 gr.
922116006	SP-116/RLDUB	Double sided Plexiglass 4mm marking panel with all directions (Can be used only when the luminaire is installed on the ceiling)	✓	434 gr.



A-3018



SP-116/RLDUB

#### BATTERIES

CODE	TYPE	DESCRIPTION
601003606	A-926	Battery 3,6V/600mAh Ni-Cd
601213615	B-972/HT	Battery 3,6V/1,5Ah Ni-Cd
601214815	B-973/HT	Battery 4,8V/1,5Ah Ni-Cd
601233630	B-949/HT	Battery 3,6V/3Ah Ni-Cd
601214830	B-941/HT	Battery 4,8V/3Ah Ni-Cd
601134840	B-936/HT60SC	Battery 4,8V/4Ah Ni-Mh
601233610	A-931/HT	Battery 3,6V/1Ah Ni-Cd