



1 GR-751/LP/LL
GR-753/LP/HL

2 GR-750/HP/LL
GR-752/HP/HL

BAU LIGHT

CE

ST
SELF TESTING

⌚
1-3-8h

Ni-Cd

💧
IP54

👁️
15m

👁️
17m

🚶➡️

⏪

⏩

CODE	TYPE	IMAGE	ST	M	NM	💧	🔋	⌚	⚡	🏠 Mains/ Emergency	📦 kg
923750001	GR-750/ST/HP/LL	2	✓	✓	✓	IP54	3,6V/1,5Ah Ni-Cd	1h/3h/8h	4,1W/4,3VA	270/300 270/150 270/30lm	937 gr.
923751000	GR-751/ST/LP/LL	1	✓	✓	✓	IP54	3,6V/1,5Ah Ni-Cd	1h/3h/8h	4,1W/4,3VA	270/300 270/150 270/30lm	888 gr.
923752000	GR-752/ST/HP/HL	2	✓	✓	✓	IP54	3,6V/3Ah Ni-Cd	1h/3h/8h	4,5W/4,7VA	270/350 270/280 270/90lm	1010 gr.
923753000	GR-753/ST/LP/HL	1	✓	✓	✓	IP54	3,6V/3Ah Ni-Cd	1h/3h/8h	4,5W/4,7VA	270/350 270/280 270/90lm	961 gr.

HP: High Profile/ High opal hood, LP: Low Profile /deep transparent hood, LL: Low luminosity/small light intensity HL: High luminosity/Great light intensity


📦 The packaging contains 9pcs.

SINGLE-SIDE PICTOGRAMS					
CODE	TYPE	DESCRIPTION	IMAGE	INCLUDED	
807750006	S-75000/LO	Pictogram Left ISO single side 17m	1	✓	← 🚶
807750004	S-75000/RO	Pictogram Right ISO single side 17m	1	✓	🚶 →
807750008	S-75000/DO	Pictogram Down ISO single side 17m	1	✓	🚶 ↓
807730006	S-73600/LO	Pictogram Left ISO single side 15m	2	✓	← 🚶
807730004	S-73600/RO	Pictogram Right ISO single side 15m	2	✓	🚶 →
807730008	S-73600/DO	Pictogram Down ISO single side 15m	2	✓	🚶 ↓
807736006	S-73601/LO	Pictogram Left ISO single side 15m	2	✓	← 🚶
807736004	S-73601/RO	Pictogram Right ISO single side 15m	2	✓	🚶 →
807736008	S-73601/DO	Pictogram Down ISO single side 15m	2	✓	🚶 ↓


BATTERIES		
CODE	TYPE	DESCRIPTION
601213615	B-972/HT	Battery 3,6V/1,5Ah NiCd
601233630	B-949/HT	Battery 3,6V/3Ah Ni-Cd

Mounting methods


Ceiling or wall mounting



Dimensions

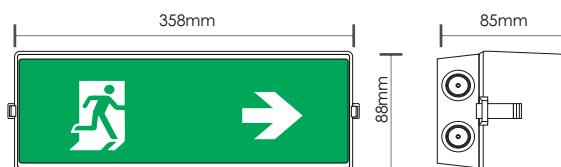

LP: Low Profile /deep transparent hood

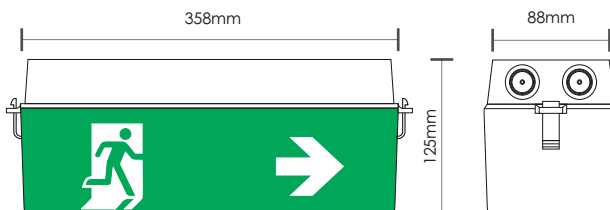

HP: High Profile/ High opal hood

Photometric

