



CLASSIC LIGHT



| CODE | TYPE | ST | M | NM | Water | Battery | Runtime | Power | Beam | Weight |
|-----------|--------------------|----|---|----|-------|-------------------|---------|--------------|------------|---------|
| 923151004 | GR-151-3/L* | — | ✓ | ✓ | IP20 | 3,6V/1Ah Ni-Cd | 3 h | 3W / 4 VA | 30/75 lm | 672 gr. |
| 923108013 | GR-108/12L/90 | — | ✓ | ✓ | IP20 | 3,6V/600mAh Ni-Cd | 1,5 h | 2,5W / 3VA | 40/100 lm | 635 gr. |
| 923109004 | GR-109/12L/180 | — | ✓ | ✓ | IP20 | 3,6V/1Ah Ni-Cd | 3 h | 3W / 3,5VA | 38/100 lm | 635 gr. |
| 923119007 | GR-119/6L/42V/KL** | — | ✓ | ✓ | IP20 | 4,8V/1,5Ah Ni-Cd | 1,5 h | 4,7W / 8,7VA | 205/340 lm | 730 gr. |

The packaging contains 16pcs.


| SINGLE-SIDE PICTOGRAMS | | | |
|------------------------|------------|-------------------------------------|----------------------|
| CODE | TYPE | DESCRIPTION | INCLUDED / ON DEMAND |
| 807108007 | S-10800/LO | Pictogram Left ISO single side 18m | ✓ / |
| 807108005 | S-10800/RO | Pictogram Right ISO single side 18m | ✓ / |
| 807108009 | S-10800/DO | Pictogram Down ISO single side 18m | ✓ / |
| 807108011 | S-10800/UO | Pictogram Up ISO single side 18m | ✓ / |

| ACCESSORIES | | | |
|-------------|--------|---|-----------|
| CODE | TYPE | DESCRIPTION | Weight |
| 927101500 | A-1015 | Base for recessed mounting on suspended ceiling | 273.5 gr. |



A-1015


Required opening for suspended wall or ceiling installation




| BATTERIES | | |
|-----------|----------|-----------------------------|
| CODE | TYPE | DESCRIPTION |
| 601233610 | A-931/HT | Battery 3,6V/1000mAh NiCd |
| 601003606 | A-926 | Battery 3,6V/600mAh Ni-Cd |
| 601214815 | B-973/HT | Battery 4,8V/1,5Ah HT Ni-Cd |

Mounting methods


Wall mounting



Dimensions

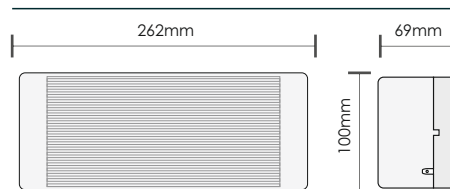

Photometric



Recessed mounting on suspended ceiling

