



- ▶ 230-V in-ground luminaires with decorative lighting effects
- ▶ Max. load of 500 kg
- ▶ Incl. mounting box for safe installation and removal for subsequent maintenance

- ▶ Luminarias empotrables en el suelo de 230 V con efectos lumínicos decorativos
- ▶ Carga máxima 500 kg
- ▶ Incluye caja empotrable para el montaje seguro y la posibilidad de extracción en un posterior mantenimiento


- ▶ Faretto da incasso a pavimento 230 V con effetti luminosi decorativi
- ▶ Possibilità di carico pari a 500 kg
- ▶ Inclusa presa a incasso per un'installazione sicura con possibilità di rimuoverla per eventuali manutenzioni successive.

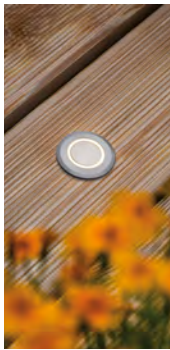


Floor
 incl. 1x2 W
 210 lm, 3.000 K
 \sphericalangle 120°, 230 V
 \updownarrow82 \varnothing50 mm
 EAN 4000870 943632
943.63
 ÂledR; Brushed stainless steel ÂledR; Stainless steel/Plastic
 ÂledR; Acero inoxidable cepillado ÂledR; Acero inoxidable/Plástico
 ÂledR; Acciaio legato spazzolato ÂledR; Acciaio legato/Plastica

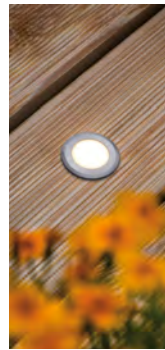

Floor
 incl. 1x2 W
 210 lm, 3.000 K
 \sphericalangle 120°, 230 V
 \updownarrow82 \varnothing50 mm
 EAN 4000870 943656
943.65
 ÂledR; Brushed stainless steel ÂledR; Stainless steel/Plastic
 ÂledR; Acero inoxidable cepillado ÂledR; Acero inoxidable/Plástico
 ÂledR; Acciaio legato spazzolato ÂledR; Acciaio legato/Plastica



Floor
 incl. 1x2 W
 210 lm, 3.000 K
 \sphericalangle 120°, 230 V
 \updownarrow82 \leftrightarrow50 \varnothing50 mm
 EAN 4000870 943649
943.64
 ÂledR; Brushed stainless steel ÂledR; Stainless steel/Plastic
 ÂledR; Acero inoxidable cepillado ÂledR; Acero inoxidable/Plástico
 ÂledR; Acciaio legato spazzolato ÂledR; Acciaio legato/Plastica



Floor
 incl. 1x2 W
 210 lm, 3.000 K
 \sphericalangle 120°, 230 V
 \updownarrow82 \leftrightarrow50 \varnothing50 mm
 EAN 4000870 943663
943.66
 ÂledR; Brushed stainless steel ÂledR; Stainless steel/Plastic
 ÂledR; Acero inoxidable cepillado ÂledR; Acero inoxidable/Plástico
 ÂledR; Acciaio legato spazzolato ÂledR; Acciaio legato/Plastica



- ▶ Dust- and waterproof during temporary immersion (IP67)
- ▶ Operates directly with 230 V

- ▶ Hermético al polvo y resistente al agua en caso de inmersión temporánea (IP67)
- ▶ Funciona directamente con 230 V

- ▶ Protezione da penetrazione di polvere e breve immersione in acqua (IP67)
- ▶ Funzionamento diretto a 230 V



Floor LED
 incl. 1x3,5 W, GU10
 230 lm, 3.000 K
 230 V
 \updownarrow124 \varnothing108 mm
 EAN 4000870 939925
939.92
 ÂledR; Stainless steel ÂledR; Metal
 ÂledR; Acero inoxidable ÂledR; Metal
 ÂledR; Acciaio legato ÂledR; Metallo



Floor LED
 incl. 1x3,5 W, GU10
 230 lm, 3.000 K
 230 V
 \updownarrow124 \leftrightarrow108 \varnothing108 mm
 EAN 4000870 939932
939.93
 ÂledR; Stainless steel ÂledR; Metal
 ÂledR; Acero inoxidable ÂledR; Metal
 ÂledR; Acciaio legato ÂledR; Metallo

